

SPDT Failsafe DC to 3 GHz Electro-Mechanical Relay Switch, Hot Switching, up to 400W, 24V, SMT

The SEMS-4088-SPDT-SM is an SPDT electromechanical relay switch that operates over a wide frequency band from DC to 3GHz with up to 400 Watts of input power (CW) handling capability. Rated for 2M life cycles of cold switching for high reliability operation, this design uses a failsafe actuator with a break before make configuration. The switch exhibits exceptional electrical performance specified from 0.1 dB max for insertion loss and from 50 dB min for isolation, and guaranteed over -25°C to +85°C. The assembly requires an operating voltage of +24Vdc and is certified as RoHS and REACH compliant.

Electrical Specifications

Switch Type SPDT
Actuator Type Failsafe
Switching Sequence Break before Make
Actuator Options Hot Switching

Description	Min	Typ	Max	Units
Frequency Range	DC		3	GHz
Impedance		50		Ohms
Operating Voltage	20.5	24	30	Volts
Actuating Current @ 24 Volts		25		mA
VSWR			1.35:1	
Insertion Loss			0.3	dB
Isolation	40			dB
Coil Resistance		1,130		Ohms
Third Order Intermodulation		-120		dBc
Input Power (CW) (Cold Switching)			175	Watts

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC - 1	1 - 2	2 - 3			GHz
VSWR, Max	1.1:1	1.2:1	1.35:1			
Insertion Loss, Max	0.1	0.2	0.3			dB
Isolation, Min	50	45	40			dB
Power In, Max (CW)	400	280	175			Watts

Electrical Specification Notes:


Average Power and Actuating Current values at 25°C.

Third Order Intermodulation conditions: 2 carriers, 20W each.

Max. Input Power (CW) for hot switching: 50W (DC to 2GHz), 40W (2 to 3GHz).

Dielectric test voltage: 300Vrms.

Insulation resistance at 500Vdc: 100MOhms min.



Features:

- Single Pole Double Throw SMT Relay Switch
- DC to 3 GHz Frequency Range
- 2M Cycle Operating Life (Cold Switching) Min
- 175 Watt Avg Power
- -25 to +85 Deg C Operating Temperature
- Insertion Loss 0.3 dB Max
- VSWR 1.35:1 Max

Applications:

- General Purpose High Performance Relay Switch
- Military Communications
- Communications Systems
- Test & Measurement

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Mechanical Specifications

Size

Length	0.53 in [13.46 mm]
Width/Diameter	0.41 in [10.41 mm]
Height	0.28 in [7.11 mm]
Weight	0.0155 lbs [7.03 g]
Package Type	Surface Mount
Operating Life (Cold Switching)	2,000,000 Cycles
Operating Life (Hot Switching)	500,000 Cycles
Making Contacts	4 ms Max (1.8 ms Typ)
Breaking Contacts	1 ms Max (500 μ s Typ)

Connectors

RF Connector Type	SMT
-------------------	-----

Mechanical Specification Notes:

Cold Switching: 120 cycles/min maximum
Hot Switching: 20 cycles/min maximum

Environmental Specifications

Temperature

Operating Range	-25 to +85 deg C
Storage Range	-55 to +85 deg C

Ingress Protection (IP) Rating	IEC 60529 / IP67
Shock	MIL-STD-202, Method 213B, Cond C (operating)
Sine Vibration	MIL-STD-202, Method 204, Cond D (operating)/Cond G (non-operating)
Random Vibration	MIL-STD-202, Method 214A, Profile I, Cond F (operating)/Cond H (non-operating)

Environmental Specification Notes:

Environmental specifications are guaranteed but not tested.



Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values shown are typical at 25°C.

Typical Performance Data

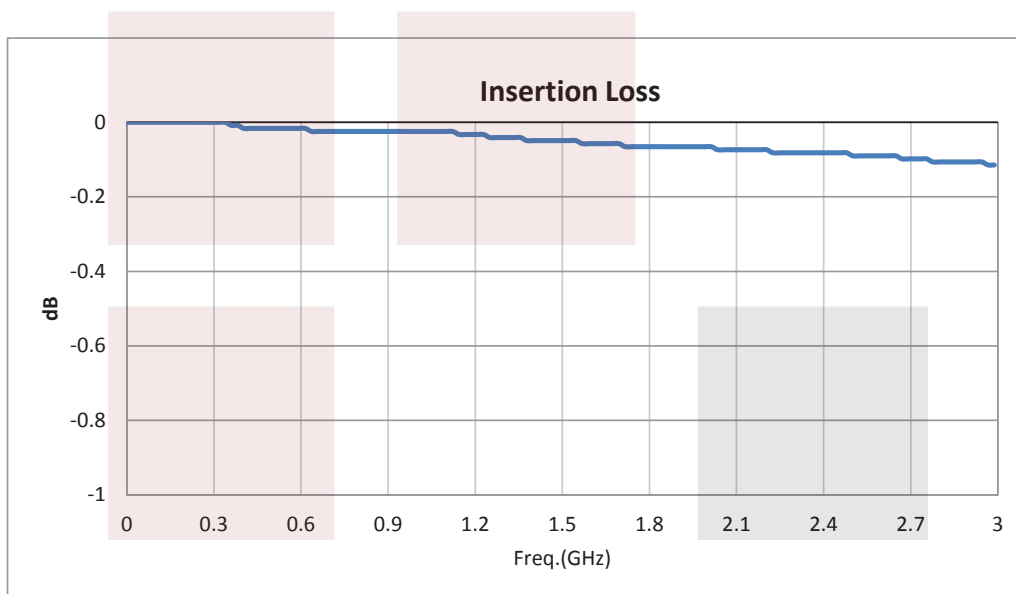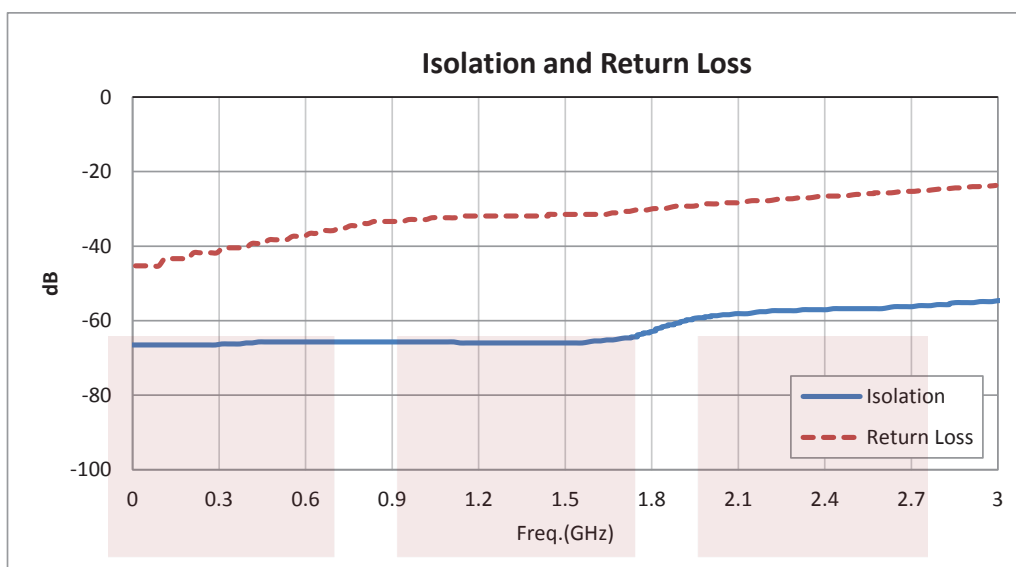

SPDT Failsafe DC to 3 GHz Electro-Mechanical Relay Switch, Hot Switching, up to 400W, 24V, SMT from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SPDT Failsafe DC to 3 GHz Electro-Mechanical Relay Switch, Hot Switching, up to 400W, 24V, SMT SEMS-4088-SPDT-SM](#)

URL: <https://www.fairviewmicrowave.com/spdt-failsafe-electro-mechanical-relay-switch-sems-4088-spd-sm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



A – Soldering procedure using automatic pick and place equipment

1-Solder paste:

R596 series are « Lead Free », and Lead Free Sn-Ag3.5-Cu0.7 solder cream may be used as well as standard Sn63-Pb35-Ag2. It is recommended using a « no clean - low residue » solder cream (5% solid residue of flux quantity) that will permit the elimination of the cleaning operation step after soldering.

Note: Due to the gold plating of the switch PCB interface, it is important to use a paste made with silver. This will help in avoiding formation of intermetallics as part of the solder joint.
RECOMMENDED SOLDERING PROCEDURE

2-Solder paste deposition:


Solder cream may be applied on the board with screen printing or dispenser technologies. For either method, the solder paste must be coated to appropriate thickness and shapes to achieve good solder wetting. Please optically verify that the edges of the zone are clean and without contaminates, and that the PCB zoned areas have not oxydated. The design of the mounting pads and the stenciling area are given on page 7, for a thickness of the silk-screen printing of 0.15 mm (0.006 ").

3-Placement of the component:

For small lightweight components such as chip components, a self-alignment effect can be expected if small placement errors exist. However, this effect is not as expected for relays components and they require a accurate positioning on their soldering pads, typically +/- 0.1mm (+/-0.004"). Place the relay onto the PCB with automatic pick and place equipment. Various types of suction can be used. We do not recommend using adhesive agents on the component or on the PCB.

4-Soldering: infra-red process

Please follow the recommended temperature profile for infra-red reflow or forced air convection:

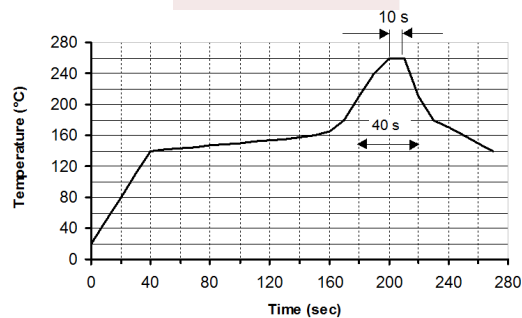

Higher temperature (>260°C) and longer process duration would damage permanently the switches

5-Cleaning procedure:

On miniature relays, high frequency cleaning may cause the contacts to stick. If cleaning is needed, please avoid ultrasonic cleaning and use alcohol based cleaning solutions.



In-line cleaning process, spraying, immersion, especially under temperature, may cause a risk of degradation of internal contacts.

6-Quality check:

Verify by visual inspection that the component is centered on the mounting pads.

Solder joints: verify by visual inspection that the formations of meniscus on the pads are proper, and have a capillarity amount upper the third of the height.

B – Soldering procedure by manual operation

1-Solder paste and flux deposition:

Refer to procedure A – 1
Deposite a thin layer of flux on mounting zone.
Allow the flux to evaporate a few seconds before applying the solder paste, in order to avoid dilution of the paste.

2-Solder paste deposition:

We recommends depositing a small amount of solder paste on the mounting zone area by syringe.
Be careful, not to apply solder paste outside of the zone area.

3-Placement of the component:

During manipulation, avoid contaminating gold surfaces by contact with fingers.
Place the component on the mounting zone by pressing on the top of the relay lid.

4-Hand soldering:

Iron wattage 30 to 60 W.
Tip temperature 280 to 300°C for max. 5 seconds
To keep good RF characteristics above 3GHz, it is important to solder RF ports first, and apply pressure on the relay lid during all the soldering stage, so as to reduce the air gap between the PC board and the relay.

5-Cleaning procedure:


Refer to procedure A – 5.

6-Quality check:


Verify by visual inspection that component is centered on the mounting pads.

Solder joints: verify by visual inspection that the formations of meniscus on the RF pads are proper, and have a capillarity amount higher than one third of the height.

SPDT Failsafe DC to 3 GHz Electro-Mechanical Relay
Switch, Hot Switching, up to 400W, 24V, SMT

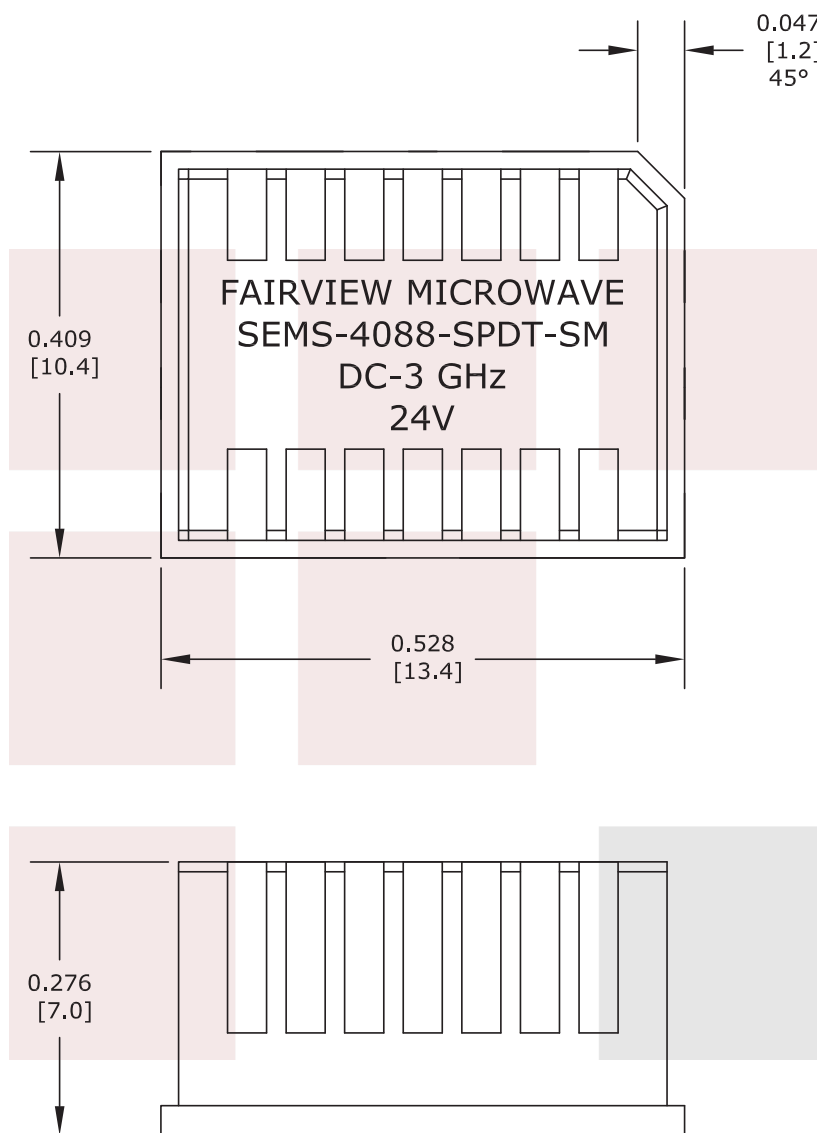

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE SPDT Failsafe DC to 3 GHz Electro-Mechanical Relay Switch, Hot Switching, up to 400W, 24V, SMT		DWG NO SEMS-4088-SPDT-SM		CAGE CODE 3FKR5	
CAD FILE	050615	SHEET	SCALE	N/A	SIZE A 2233

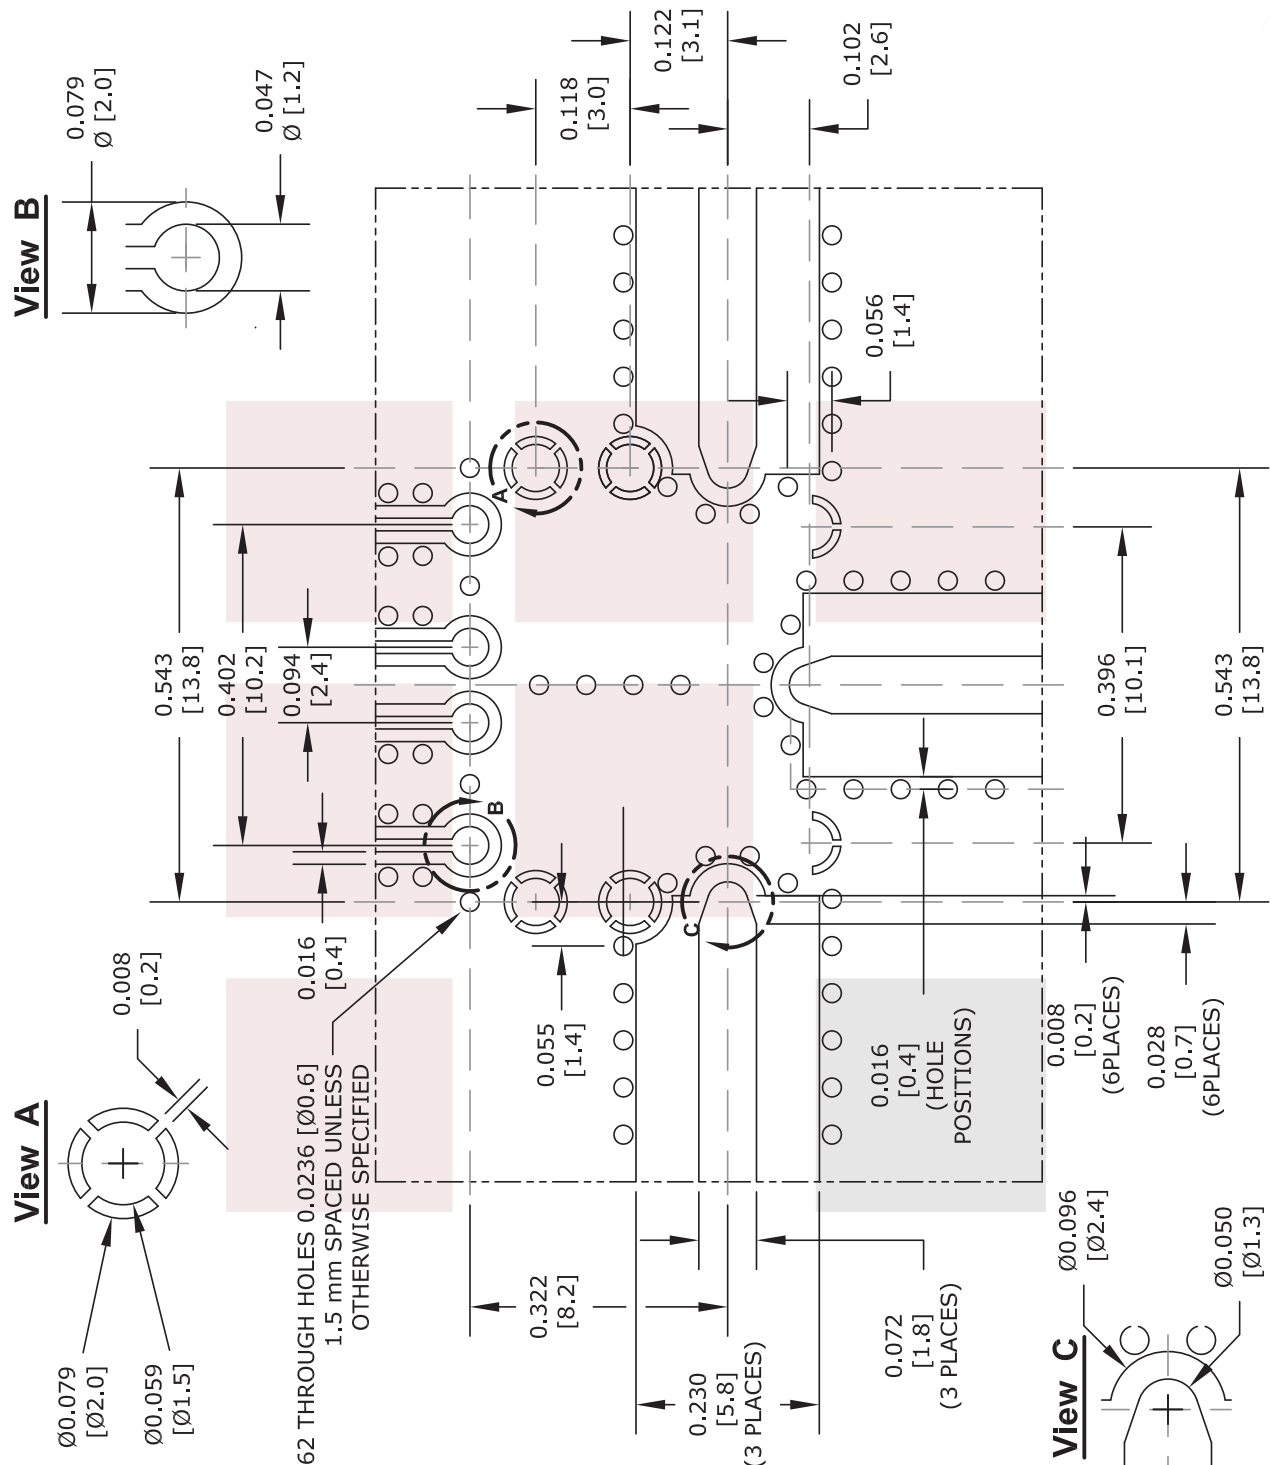

FAIRVIEW MICROWAVE INC.
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE
SPDT Failsafe DC to 3 GHz Electro-Mechanical Relay
Switch, Hot Switching, up to 400W, 24V, SMT

DWG NO
SEMS-4088-SPDT-SM

CAGE CODE
3FKR5


CAD FILE 050615

SHEET

SCALE N/A

SIZE A

2233

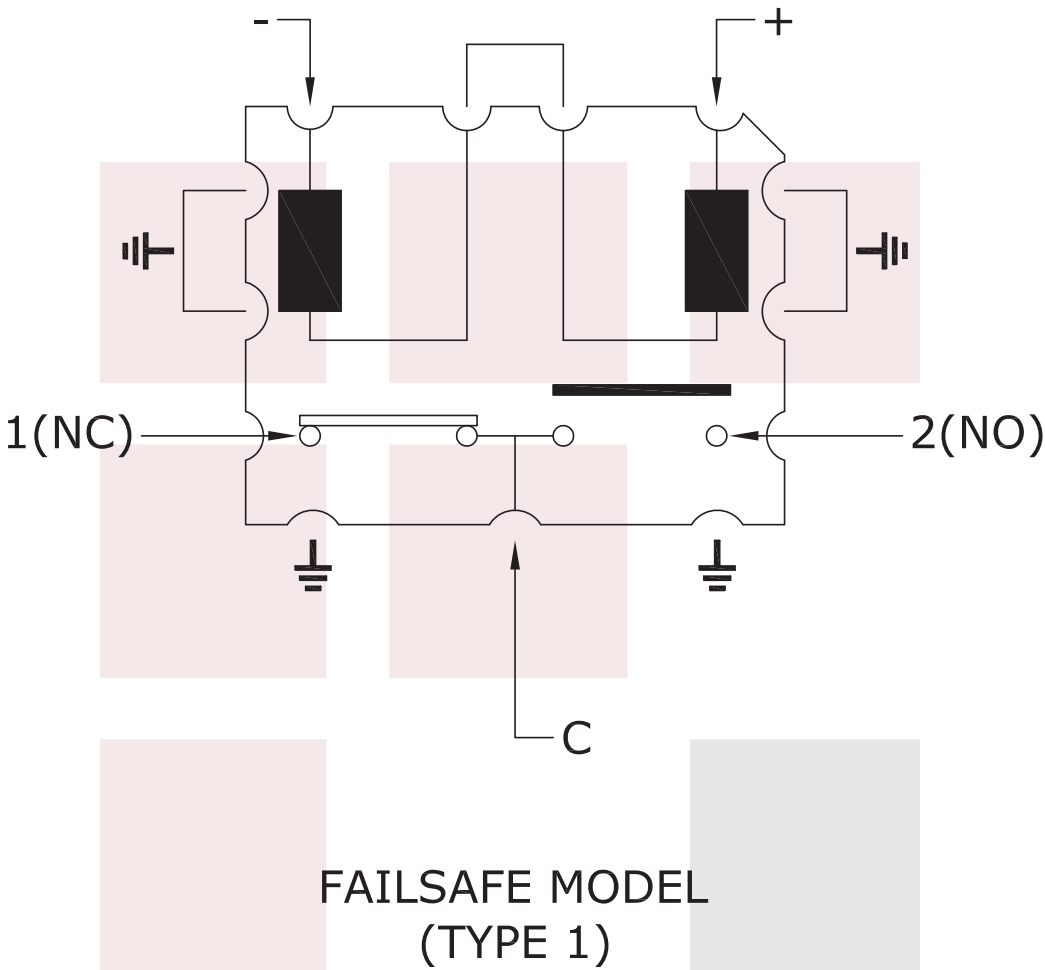

Voltage	RF Continuity
De-Energized	C $\longleftrightarrow$ 1(NC)
Energized	C $\longleftrightarrow$ 2(NO)

FAIRVIEW MICROWAVE INC.
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE
SPDT Failsafe DC to 3 GHz Electro-Mechanical Relay
Switch, Hot Switching, up to 400W, 24V, SMT

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG NO	SEMS-4088-SPDT-SM	CAGE CODE	3FKR5
CAD FILE	050615	SHEET	SCALE N/A
		SIZE A	2233