

SMH162NR-10 DATA SHEET

WR-62 Standard Gain Horn With N Female Input and 10 dB Typical Gain Operating Within 12.4 GHz to 18 GHz Frequency Range

Configuration

Design WR-62 Standard Gain Horn

Pattern Directional Polarization Linear Coaxial Interface N Female



Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	12.4		18	GHz
Impedance		50		Ohms
Waveguide Standard Gain Horn				
Gain		10		dB
Horizontal 3dB Beam V	/idth	50.9		Degrees
Vertical 3dB Beam Wid	th	55.3		Degrees

Waveguide to Coaxial Adapter

Input VSWR 1.25:1

Mechanical Specifications

Size

Length 2.08 in 52.83 mm
Width/Diameter 1 in 25.4 mm
Height 0.68 in 17.27 mm

RF Connector

Type N Female

Body Material and Plating Passivated Stainless Steel

Waveguide Interface

Waveguide Size WR-62
Body Material and Plating Aluminum

Environmental Specifications

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






WR-62 Standard Gain Horn With N Female Input and 10 dB Typical Gain Operating Within 12.4 GHz to 18 GHz Frequency Range from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: WR-62 Standard Gain Horn With N Female Input and 10 dB Typical Gain Operating Within 12.4 GHz to 18 GHz Frequency Range SMH162NR-10

URL: https://www.fairviewmicrowave.com/wr-62-standard-gain-horn-10-db-n-smh162nr-10-p.aspx






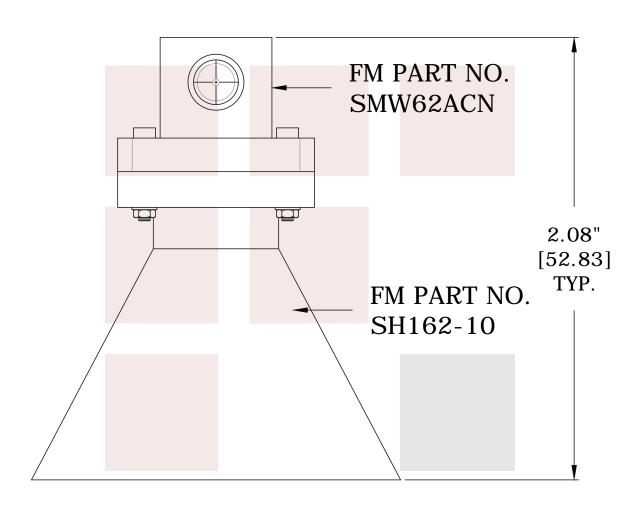

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
WR-62 Standard Gain Horn With N Female Input and 10 dB Typical Gain Operating Within 12.4 GHz to 18 GHz Frequency Range	DWG NO SMH162NR-10			CAGE CODE 3FKR5			
	CAD FILE 040416	SHEET	SCALE N/A		SIZE A	5568	





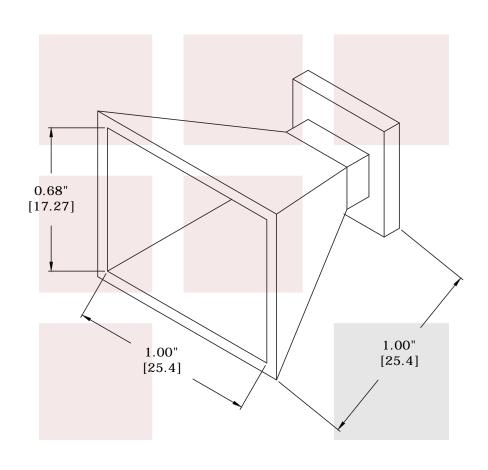

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
WR-62 Standard Gain Horn With N Female Input and 10 dB Typical Gain Operating Within 12.4 GHz to 18 GHz Frequency Range	DWG NO SMH162NR-10			CAGE CODE 3FKR5		
	CAD FILE 040416	SHEET	SCAL	E N/A	SIZE A	5568