

### SMH190NR-20 DATA SHEET

## WR-90 Standard Gain Horn With N Female Input and 20 dB Typical Gain Operating Within 8.2 GHz to 12.4 GHz Frequency Range

#### Configuration

Design WR-90 Standard Gain Horn

Pattern Directional Polarization Linear Coaxial Interface N Female

# Patriew Microwave

#### **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	8.2		12.4	GHz
Impedance		50		Ohms
Waveguide Standard	Gain Horn			
Gain		20		dB
Horizontal 3dB Beam V	Vidth	16.5		Degrees
Vertical 3dB Beam Width		16.1		Degrees

#### **Waveguide to Coaxial Adapter**

Input VSWR		1.25:1	

#### **Mechanical Specifications**

Size

 Length
 11.06 in 280.92 mm

 Width/Diameter
 4.87 in 123.7 mm

 Height
 3.62 in 91.95 mm

**RF Connector** 

Type N Female

**Waveguide Interface** 

Waveguide Size WR-90 Body Material and Plating Aluminum

#### **Environmental Specifications**

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





WR-90 Standard Gain Horn With N Female Input and 20 dB Typical Gain Operating Within 8.2 GHz to 12.4 GHz Frequency Range from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: WR-90 Standard Gain Horn With N Female Input and 20 dB Typical Gain Operating Within 8.2 GHz to 12.4 GHz Frequency Range SMH190NR-20

URL: https://www.fairviewmicrowave.com/wr-90-standard-gain-horn-20-db-n-smh190nr-20-p.aspx








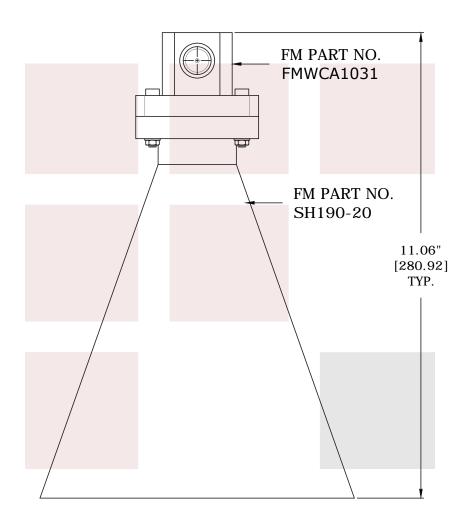

FAIRVIEW MICROWAVE INC.  WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
WR-90 Standard Gain Horn With N Female Input and 20 dB Typical Gain Operating Within 8.2 GHz to 12.4 GHz Frequency Range	DWG NO SMH190NR-20			CAGE CODE 3FKR5		
	CAD FILE 040416	SHEET	SCALE	E N/A	SIZE A	5568





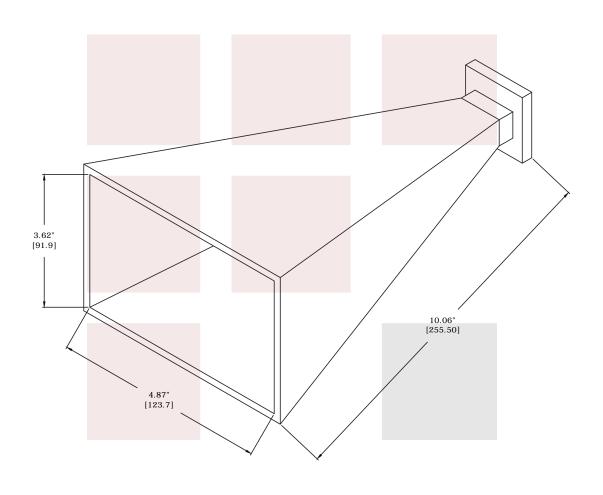

FAIRVIE WWW.FAIRVIEWMIC	W MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
WR-90 Standard Gain Horn With N Female Input and	DWG NO SMH190NR-20			C	CAGE CODE 3FKR5			
	20 dB Typical Gain Operating Within 8.2 GHz to 12.4 GHz Frequency Range	CAD FILE	040416	SHEET	SCALE	N/A	SIZE A	5568