

860 MHz to 870 MHz Stubby Antenna, Monopole,
90-degree angle, SMA Male Connector, 1 dBi Gain



LCANRBD1036

Features

- 860-870 MHz, 1 dBi Gain
- 90-degree SMA male connector
- Plug and play
- VSWR < 2:1
- Linear polarization
- Monopole antenna

Applications

- Public Safety
- Security, construction sites
- IOT sensors and trackers
- Wireless communications
- Remote control
- Industrial monitoring and tracking
- Amateur radio

Description

The L-com LCANRBD1036 is an omni antenna operating from 860 MHz to 870 MHz with 1 dBi gain. The SMA male connector on the communication antenna enables it to be used vertically, at a right angle, or at any angle in between. Our rubber duck antenna is 0.37 inches wide, 2.01 inches long, and 0.37 inches tall. Our stubby omni antenna is specifically stocked to be available for same business day shipment.

This monopole omnidirectional antenna has a linear polarization, an SMA male connector and an ABS radome material. Our 1 dBi gain LCANRBD1036 antenna transmits high power signals, increasing the signal strength, thus providing improved coverage, better broadcast control, and faster speed. L-com single-band antenna has a gain of 1 dBi antenna for the 860 MHz to 870 MHz frequency range. Our black omnidirectional antenna functions between -40 to 65 degrees C and has 50 Ohm impedance.

L-com WiFi antenna is ideal for public safety, security, construction, wireless communications, IOT sensors, IOT trackers, wireless microphones, industrial monitoring and data transmission, remote control, and amateur radio. These 1 dBi antennas have a waterproof design, a high power handling capacity, and IP65 ingress protection rating. Our high-quality LCANRBD1036 omnidirectional antenna has a maximum input VSWR of 2:1, which results in the best power transfer and reduced losses.

The 1 dBi gain omni directional antenna is just one of many fiber optic products that are available from L-com for international and domestic orders. We are a global leader in wired and wireless connectivity products, offering a wide range of solutions across many key industries, including electronics, medical, industrial automation, military, and telecommunication. L-com also stocks a wide selection of 860 MHz to 870 MHz antennas that ship same-day from our warehouse.

Configuration

Design	Rubber Duck
Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Linear
Connector Type	SMA Male

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	860		870	MHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[860 MHz to 870 MHz Stubby Antenna, Monopole, 90-degree angle, SMA Male Connector, 1 dBi Gain LCANRBD1036](#)

860 MHz to 870 MHz Stubby Antenna, Monopole,
90-degree angle, SMA Male Connector, 1 dBi Gain



LCANRBD1036

Input VSWR		2:1	
Impedance	50		Ohms
Gain	0	1	dBi
Input Power		10	Watts

Mechanical Specifications

Radome Material	ABS
Size	
Length	2.01 in [51.05 mm]
Width	0.37 in [9.4 mm]
Height	0.37 in [9.4 mm]
Weight	0.0154 lbs [6.99 g]

Environmental Specifications

Temperature	
Operating Range	-40 to +65 deg C
Storage Range	-40 to +80 deg C
Environment	Waterproof
Ingress Protection	IP65

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

860 MHz to 870 MHz Stubby Antenna, Monopole, 90-degree angle, SMA Male Connector, 1 dBi Gain from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

860 MHz to 870 MHz Stubby Antenna, Monopole, 90-degree angle, SMA Male Connector, 1 dBi Gain

L-com CAD Drawing

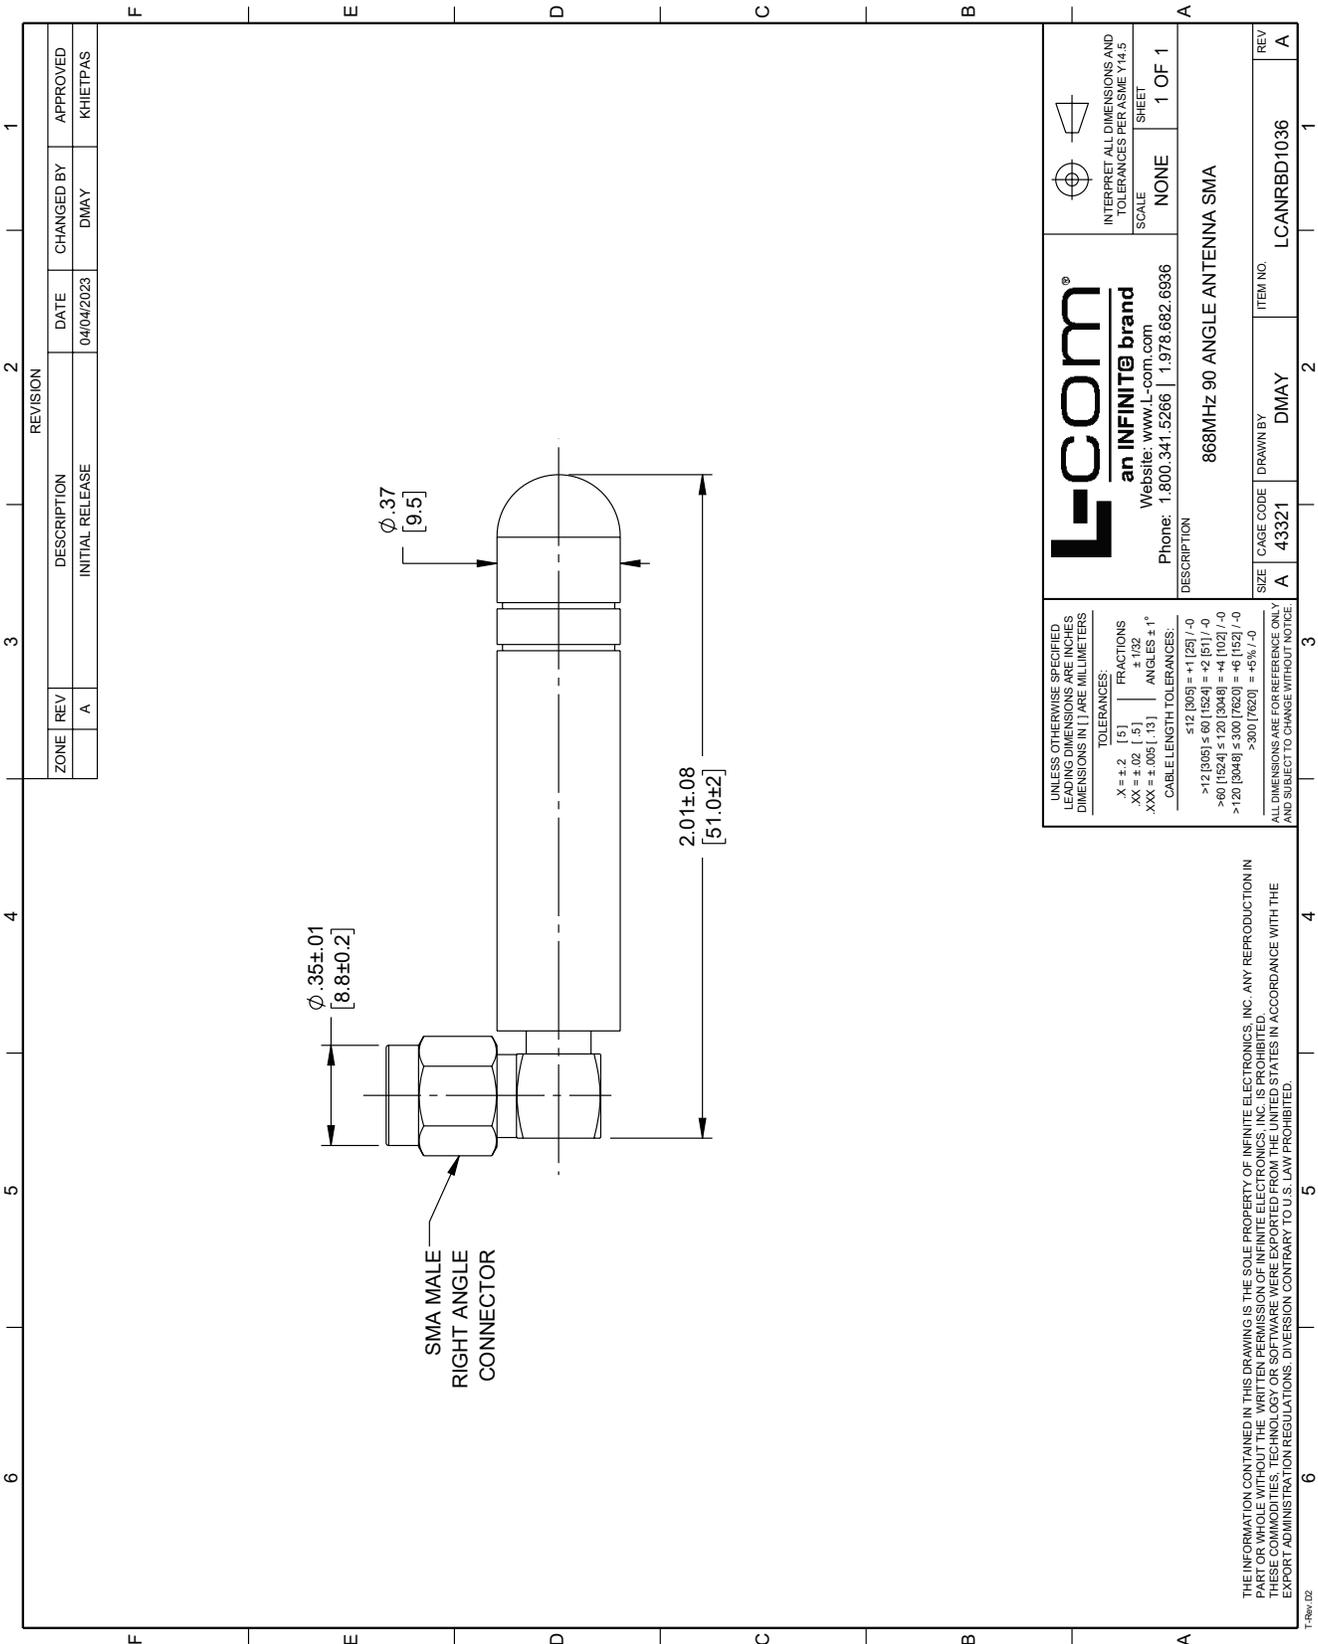

ZONE		REVISION		APPROVED	
A	REV	DESCRIPTION <td>DATE <td>CHANGED BY <td>APPROVED</td> </td></td>	DATE <td>CHANGED BY <td>APPROVED</td> </td>	CHANGED BY <td>APPROVED</td>	APPROVED
	A	INITIAL RELEASE	04/04/2023	DMAY	KHIETPAS

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE INCHES, DIMENSIONS IN [] ARE MILLIMETERS.

TOLERANCES:

X = +.2 [5] FRACTIONS
 XX = +.02 [5] ANGLES ± 1°
 XXX = ±.005 [13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:

≤ 12 [305] = +1 [25] / -0
 > 12 [305] ≤ 60 [1524] = +2 [51] / -0
 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0
 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0
 > 300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.

INFINITE ELECTRONICS, INC. IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

L-com
 an INFINITE brand
 Website: www.L-com.com
 Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SHEET

SCALE: NONE 1 OF 1

DESCRIPTION: 868MHz 90 ANGLE ANTENNA SMA

SIZE: A CAGE CODE: A 43321 DRAWN BY: DMAY ITEM NO.: LCANRBD1036

REV: A