



Multilayer Antenna


For GPS / 2.4GHz W-LAN & Bluetooth / 5.5GHz W-LAN Dual feed

ANT Series 1.6x0.8mm [EIA 0603] TYPE

P/N: **ANT161575TT-3000A1**

ANT161575TT-3000A1

SHAPES AND DIMENSIONS

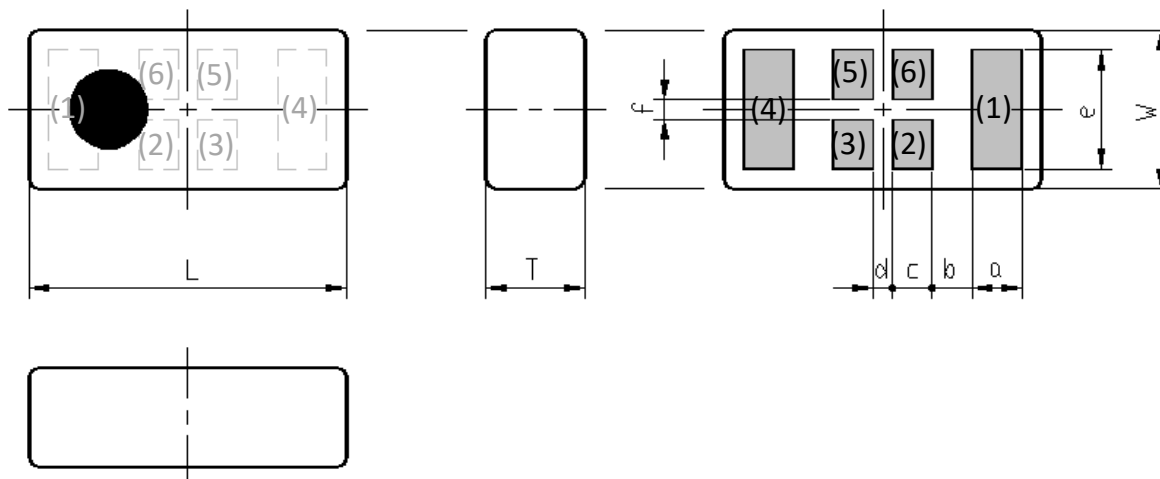

Dimensions (mm)

L	W	T	a	b	c	d	e	f
1.60	0.80	0.40	0.215	0.25	0.20	(0.10)	0.63	(0.10)
+/-0.10	+/-0.10	Max	+/-0.10	+/-0.10	+/-0.10		+/-0.10	

Terminal functions

(1)	Feed point for GPS
(2)	Common Radiator electrode
(3)	Common Radiator electrode
(4)	Feed point for 2.4GHz/5.5GHz
(5)	Dummy pad

(6)	Dummy pad
-----	-----------

*Terminal (2),(3),(5) and (6) :Connected in inner structure

TERMINATION FINISH

Material
Au plate

ANT161575TT-3000A1

ELECTRICAL CHARACTERISTICS




(Measurement)

Parameter	Frequency (MHz)	TDK Spec		
		Min.	Typ.	Max.
VSWR	1574 to 1577	-	1.20	4.0
	2400 to 2484	-	1.81	4.0
	5150 to 5850	-	3.26	4.0
Polarization		Linear		
PCB Size (mm)		120 x 65		
Antenna keep-out Area (mm)		13 x 6		
Characteristic Impedance (ohm)		50 (Nominal)		

* This is typical antenna performance with the standard PCB.

FREQUENCY CHARACTERISTICS

Note: Tested antenna has been soldered. Evaluation board size is 120x65x1 mm.

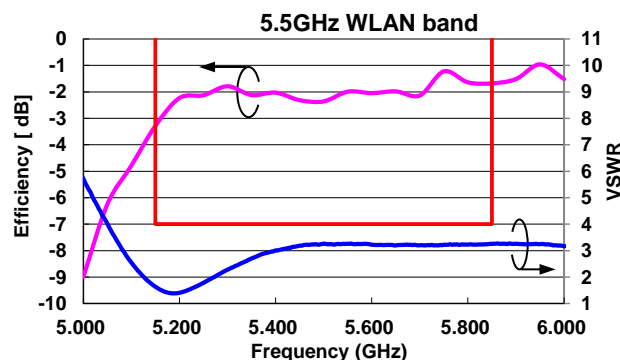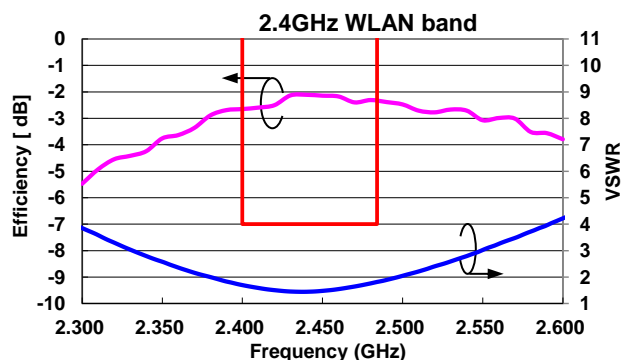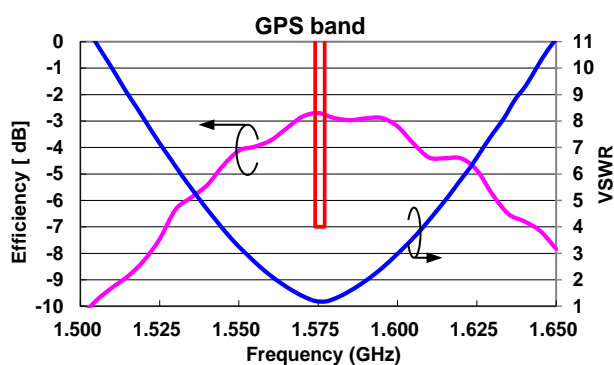

ANT161575TT-3000A1


■ MAXIMUM RATINGS

Parameter	TDK Spec	Conditions
Operating temperature (°C)	−40 to +85 °C	
Storage temperature (°C)	−40 to +85 °C	
Power Handling (W) *1	0.8	CW
Human Body Model : HBM @Each Port (V)	+/-1000	100pF / 1500ohm
Machine Model : MM @Each Port (V)	+/-150	200pF / 0ohm
Charged Device Model : CDM @Each Port (V)	+/-500	Humidity : 60%RH max


*1 : Refer to 3GPP TS 38.101-1 V15.2.0

ANT161575TT-3000A1

EVALUATION BOARD

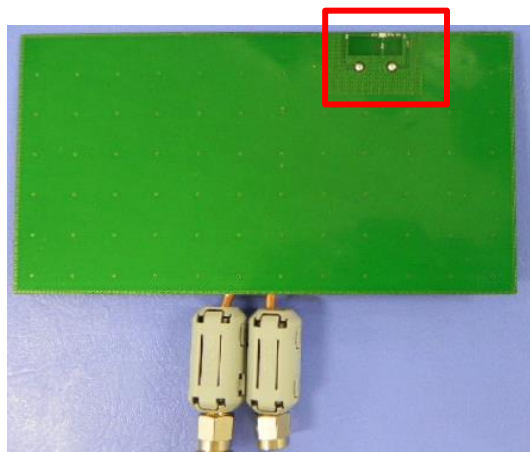


PCB size : 120mm x 65mm x 1mm
Antenna area : 13 x 6 mm

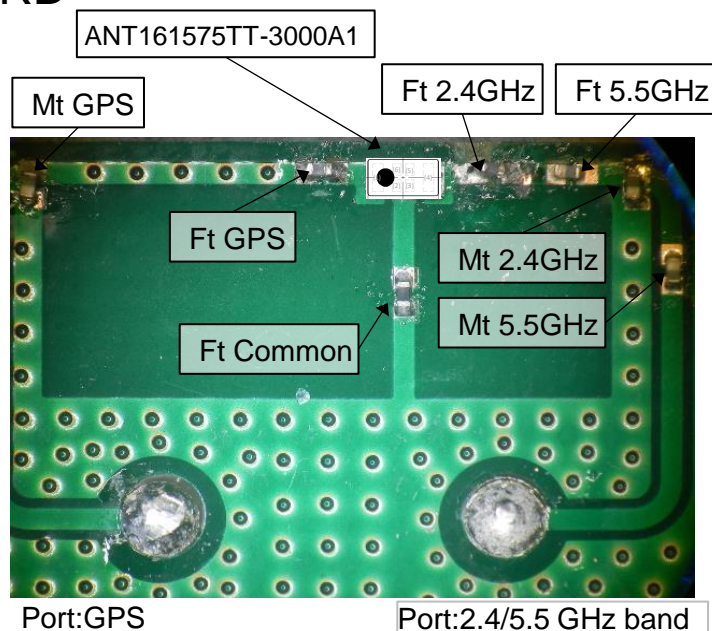

	Element Value
Ft GPS	4.0pF
Mt GPS	1.5nH(MLG0603P1N5:TDK)
Ft 2.4GHz	2.0pF
Ft 5.5GHz	0.8nH(MLG0603P0N8C:TDK)
Mt 2.4GHz	2.7nH(MLG0603P2N7C:TDK)
Mt 5.5GHz	1.5nH(MLG0603P1N5C:TDK)
Ft Common	0 ohm

Measurement condition for Radiation Pattern

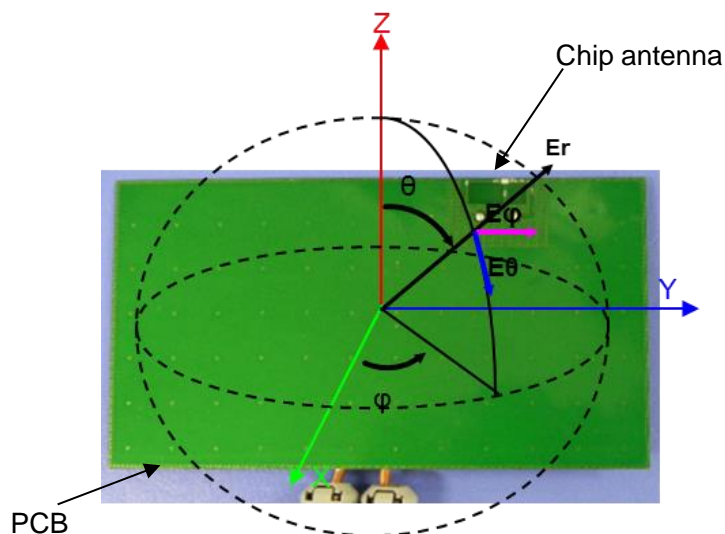




ANT161575TT-3000A1

Radiation Pattern

Note: Tested antenna has been soldered. Evaluation board size is 120x65x1 mm.

GPS Band


RHCP Radiation Pattern

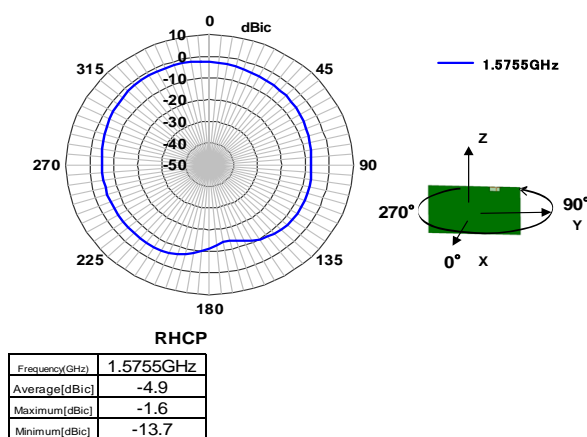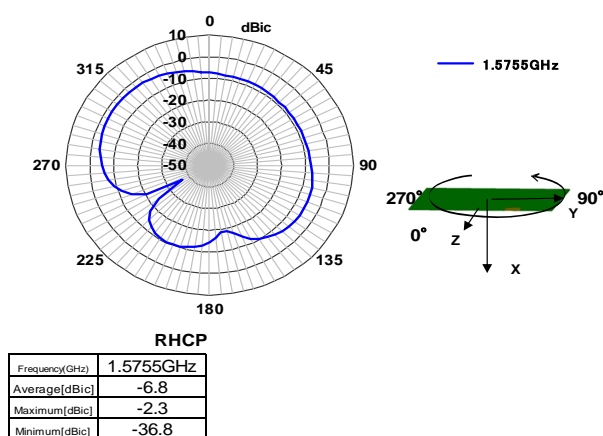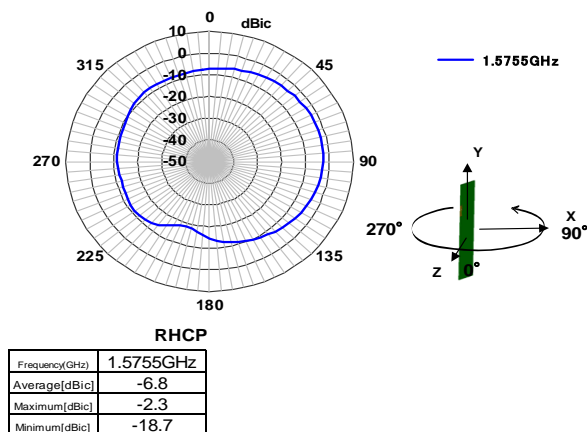

ANT161575TT-3000A1

Radiation Pattern




Note: Tested antenna has been soldered. Evaluation board size is 120x65x1 mm.
2.4GHz ISM Band


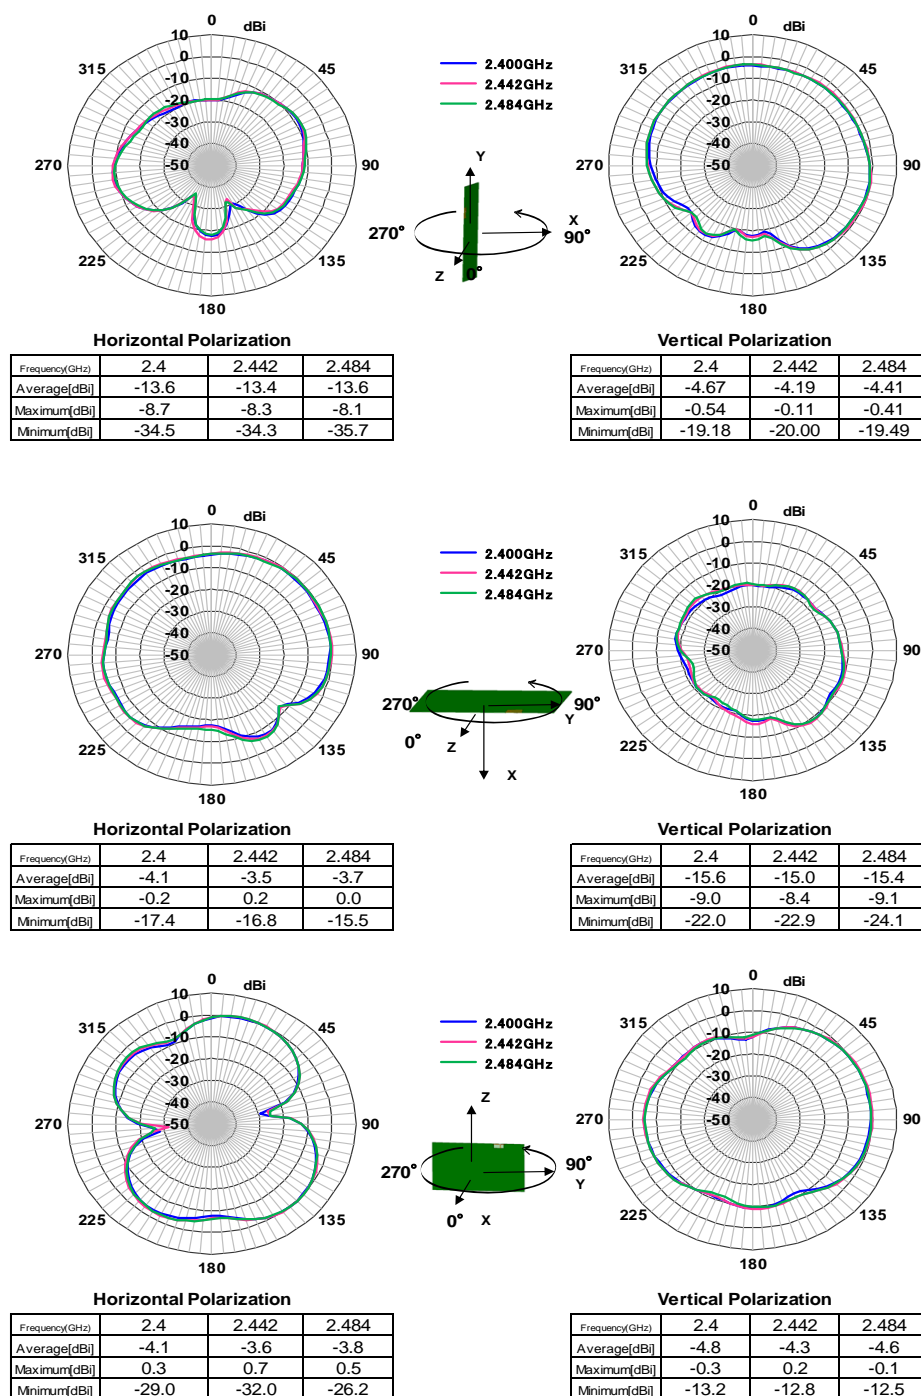


ANT161575TT-3000A1


Radiation Pattern

Note: Tested antenna has been soldered. Evaluation board size is 120x65x1 mm.
5.5GHz Band

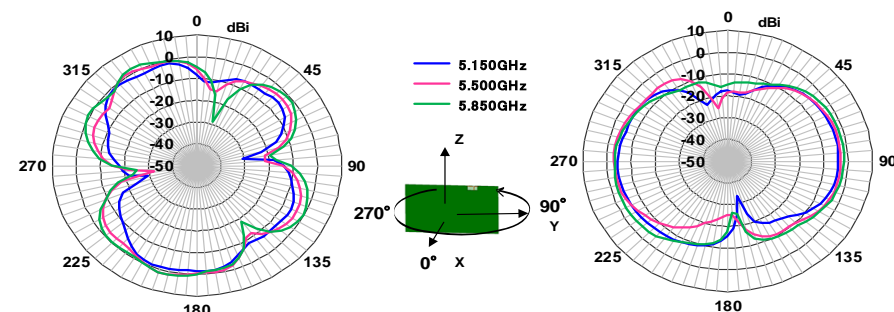
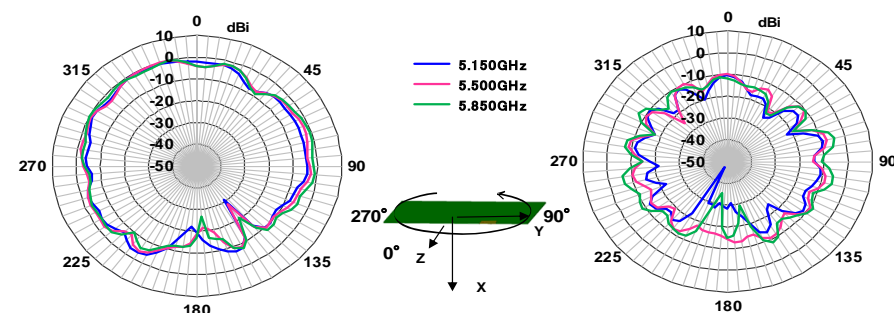
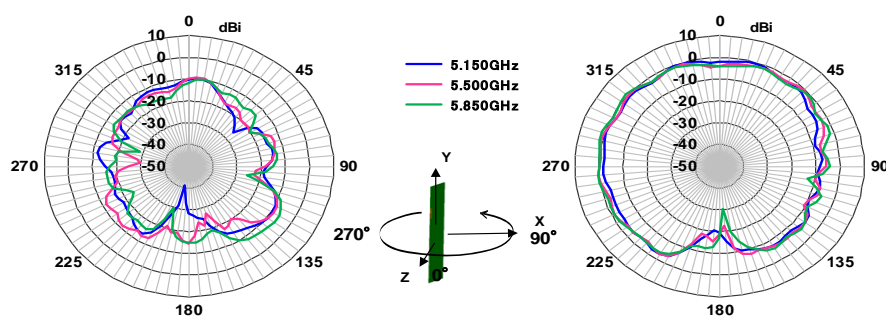


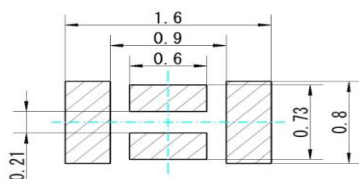ANT161575TT-3000A1**RECOMMENDED LAND PATTERN****Recommend land pattern and solder resist pattern****< Land pattern >****< Solder resist pattern >**

- Center line of Chip
- Land Pattern
- Resist Pattern

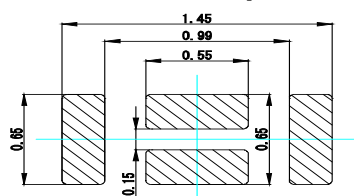Recommend aperture size of metal mask for solder printing

- Center line of Chip
- Aperture of metal

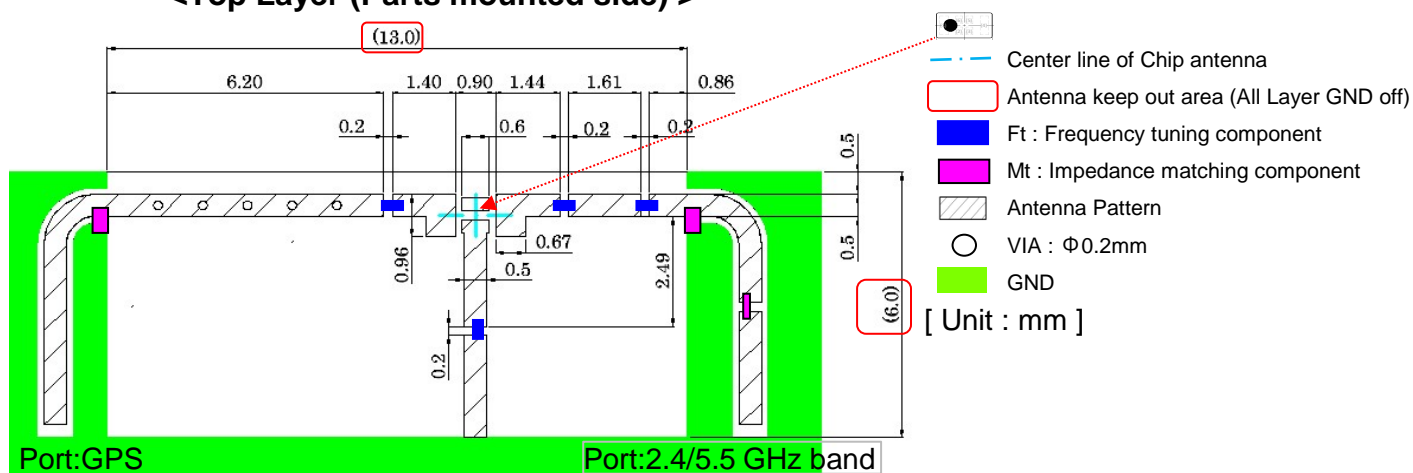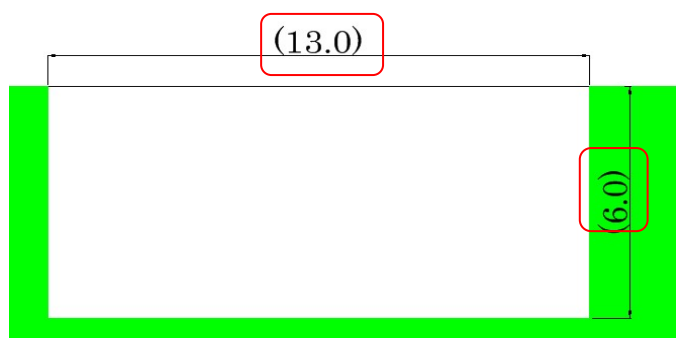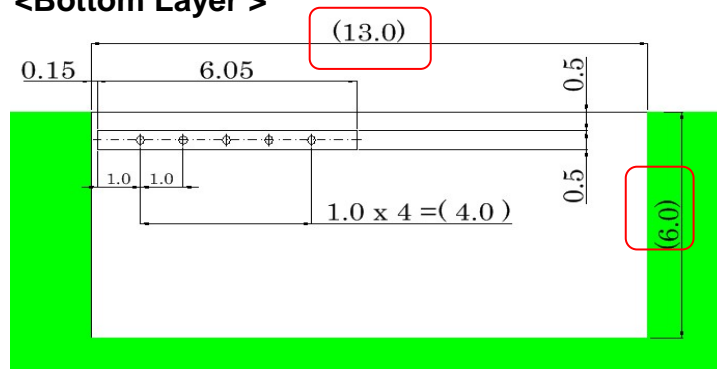Example of Antenna pattern layout (TDK Standard PCB)**<Top Layer (Parts mounted side) >****<Inner Layer >****<Bottom Layer >**

Dec. 2024 Ver.8.0
TDK Corporation


ANT161575TT-3000A1

■ ENVIROMENT INFORMATION

RoHS Statement
RoHS Compliance

TDK Corporation

RECOMMENDED REFLOW PROFILE

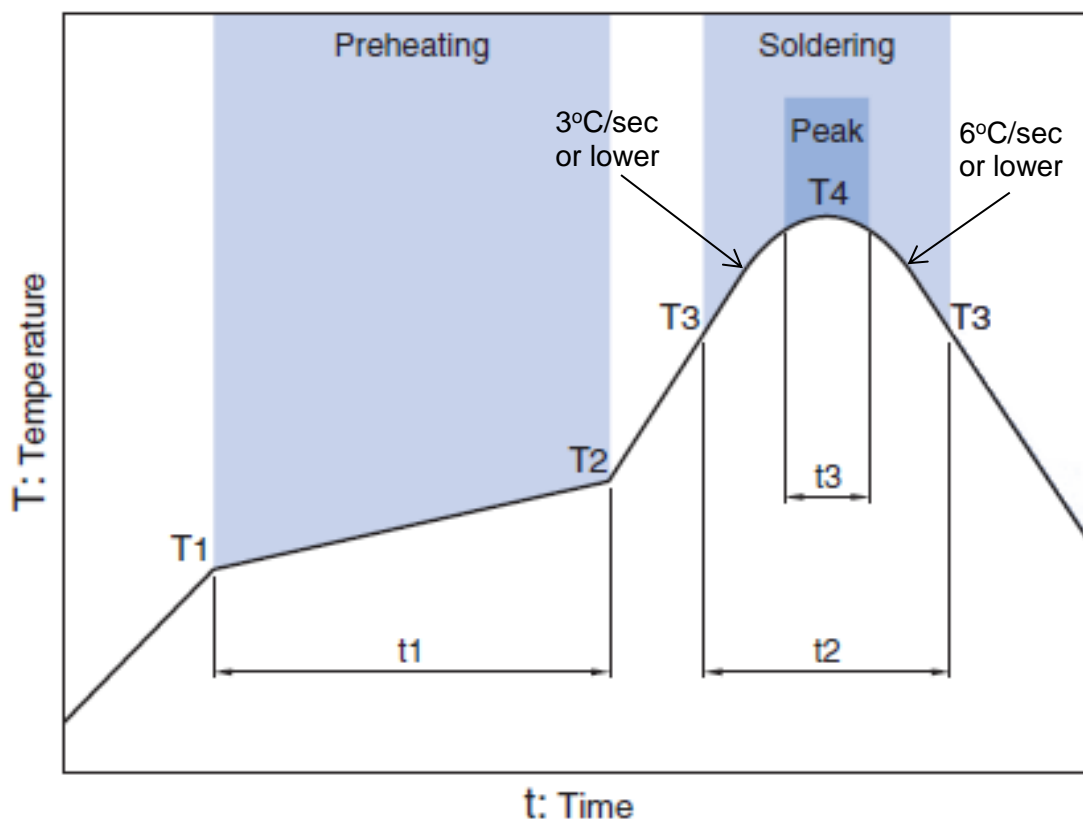

Preheating			Soldering			
			Critical zone (T3 to T4)		Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3 *
150°C	200°C	60 to 120sec	217°C	60 to 120sec	240 to 260°C	30 sec Max


* t3 : Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

Note: Lead free solder is recommended.
Recommended solder is Sn-3.0Ag-0.5Cu. (M705 by Senju Metal Industry)


ANT161575TT-3000A1**PACKAGING STYLE**

Reel Dimensions

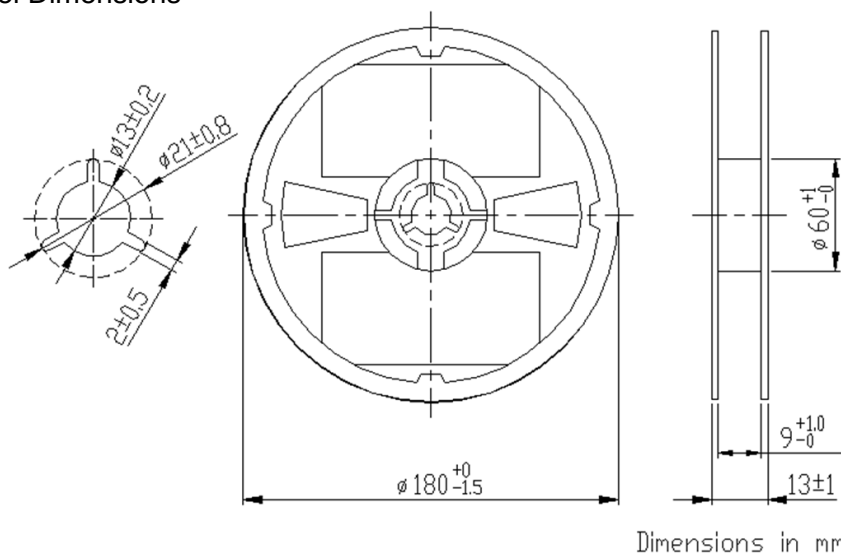

Carrier Tape

Material of the carrier tape : PS

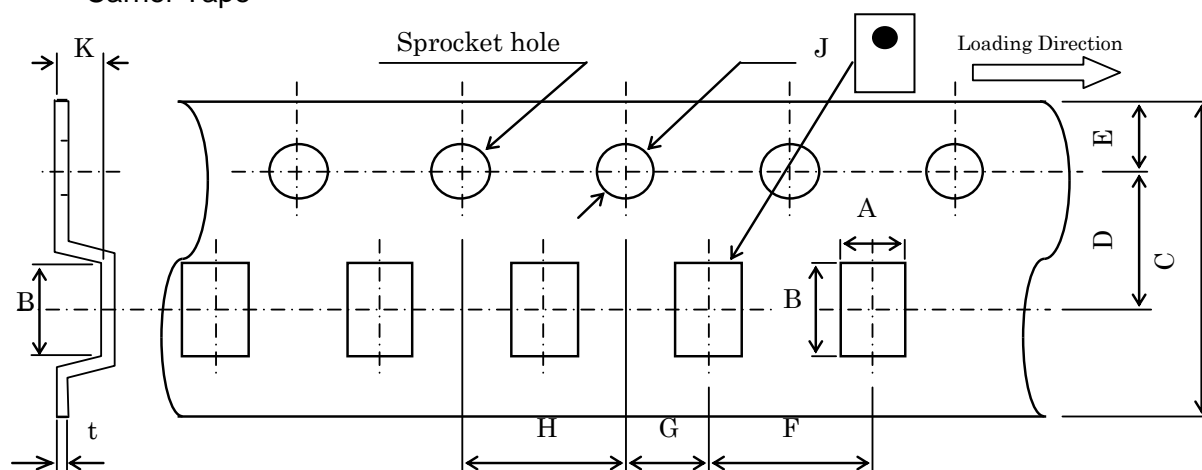

Dimensions (mm)

A	B	C	D	E	F	G	H	J	K	t
0.97	1.8	8.0	3.5	1.75	4.0	2.0	4.0	1.5	0.55	0.25
+/-0.05	+/-0.05	+/-0.2	+/-0.05	+/-0.1	+/-0.1	+/-0.05	+/-0.1	+0.1/-0	MAX	+/-0.05

STANDARD PACKAGE QUANTITY
(pieces/reel)

4,000

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- | | |
|---|--|
| (1) Aerospace/Aviation equipment | (8) Public information-processing equipment |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (9) Military equipment |
| (3) Medical equipment | (10) Electric heating apparatus, burning equipment |
| (4) Power-generation control equipment | (11) Disaster prevention/crime prevention equipment |
| (5) Atomic energy-related equipment | (12) Safety equipment |
| (6) Seabed equipment | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment | |

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.