

AB814B-B Photocoupler

DESCRIPTIONS

- The AB814B-B is optically coupled isolators containing two GaAs Light Emitting Diode and an NPN silicon phototransistor
- The lead pitch is 2.54mm

FEATURES

- AC input
- Maximum working isolation voltage $V_{IOWM} = 630 V_{RMS}$
- Maximum repetitive peak isolation voltage $V_{IORM} = 890 V_{peak}$
- Maximum transient isolation voltage $V_{IOTM} = 7 kV_{peak}$
- Maximum withstanding isolation voltage $V_{ISO} = 5000 V_{RMS}$
- Compact dual-in-line package AB814B-B:1-channel type
- Recognized by UL and CUL, file NO.E225308
- Package: 1000 pcs / reel
- Moisture sensitivity level : 4
- RoHS compliant

APPLICATIONS


- Computer terminals
- Registers, copiers, automatic vending machines
- System appliances, measuring instruments
- Programmable logic controller
- Signal transmission between circuits of different potentials and impedances

NOTES ON HANDLING

Cautions regarding electrical noise


Please ensure the power supply is stable at all times. Even if the designed operating voltage is within specification limits, sudden voltage spikes at startup may damage the component.

PACKAGE DIMENSIONS

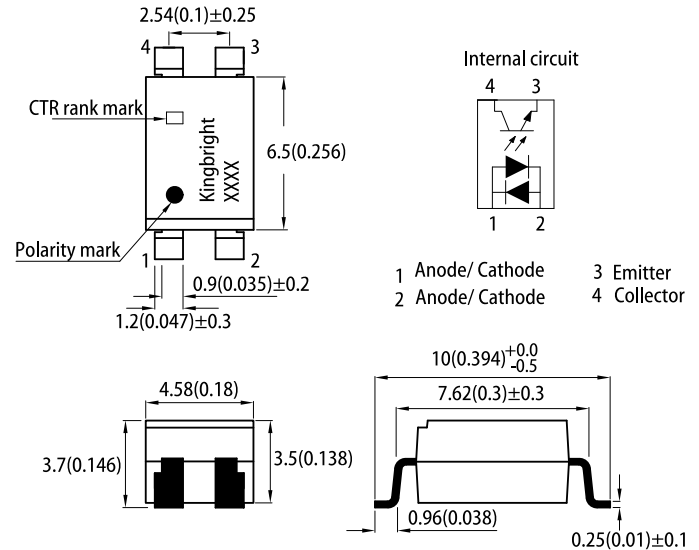

RECOMMENDED SOLDERING PATTERN

(units : mm; tolerance : ± 0.15)



- Notes:
- All dimensions are in millimeters (inches).
 - Tolerance is ±0.5(0.02") unless otherwise noted.
 - The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
 - The device has a single mounting surface. The device must be mounted according to the specifications.

ELECTRICAL / OPTICAL CHARACTERISTICS at $T_A=25^\circ C$

Parameter		Symbol	Value			Unit	Test Conditions	
			Min.	Typ.	Max.			
Input	Forward Voltage	V _F	-	1.2	1.4	V	I _F =±20mA	
	Peak Forward Voltage	V _{FM}	-	-	3.0	V	I _{FM} =±0.5A	
Output	Collector Dark Current	I _{CEO}	-	-	10 ⁻⁷	A	I _F =0mA,V _{CE} =20V	
Transfer Characteristics	Current Transfer Ratio ^[1]		CTR	120	-	300	%	I _F =±1mA,V _{CE} =5V
	Collector-Emitter Saturation Voltage		V _{CE(sat)}	-	0.1	0.2	V	I _F =±20mA,I _C =1mA
	Response Time	Rise Time	t _r	-	4	18	μs	V _{CE} =2V, I _C =2mA R _L =100 Ω
		Fall Time	t _f	-	3	18	μs	

Notes:

- Classification table of current transfer ratio is shown below.
 $CTR = \frac{I_C}{I_F} \times 100\%$

2. Excess driving current and / or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

ABSOLUTE MAXIMUM RATINGS at T_A=25°C

Parameter		Symbol	Rating	Unit
Input	Forward Current	I _F	±50	mA
	Power Dissipation	P _D	70	mW
Output	Collector-Emitter Voltage	V _{CEO}	35	V
	Emitter-Collector Voltage	V _{ECO}	6	V
	Collector Current	I _C	50	mA
	Collector Power Dissipation	P _C	150	mW
Total Power Dissipation		P _{tot}	200	mW
Isolation Voltage ^[1]		V _{iso}	5000	V _{rms}
Operating Temperature		T _{opr}	-30~+100	°C
Storage Temperature		T _{stg}	-55~+125	°C

Notes:
1. 40 to 60% RH, AC for 1 minute.
2. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.

MAXIMUM SAFETY RATINGS

Parameter	Symbol	Value			Unit	Test Condition
		Min.	Typ.	Max.		
Input Current	I _{SI}	-	-	300	mA	-
Output Power Dissipation	P _{SO}	-	-	500	mW	-
Ambient Safety Temperature	T _S	-	-	150	°C	-

Note:
1. This optocoupler is designed for electrical isolation only when operating within its specified safety ratings.
Compliance with these ratings must be guaranteed by implementing appropriate protective circuits.

TECHNICAL DATA

Fig. 1 Current Transfer Ratio vs. Forward Current




Fig. 2 Forward Current vs. Forward Voltage




Fig. 3 Collector Current vs. Collector-Emitter Voltage




Fig. 4 Relative Current Transfer Ratio vs. Ambient Temperature

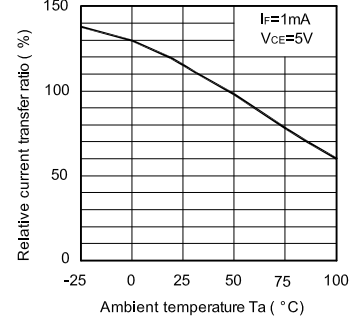


Fig. 5 Collector-Emitter Saturation Voltage vs. Ambient Temperature

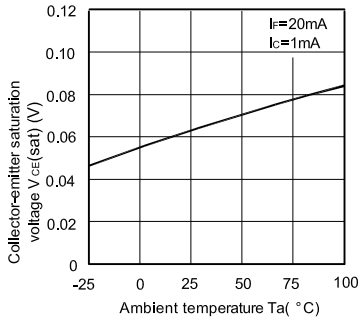


Fig. 6 Collector Dark Current vs. Ambient Temperature




Fig. 7 Forward Current vs. Ambient Temperature




Fig. 8 Collector Power Dissipation vs. Ambient Temperature

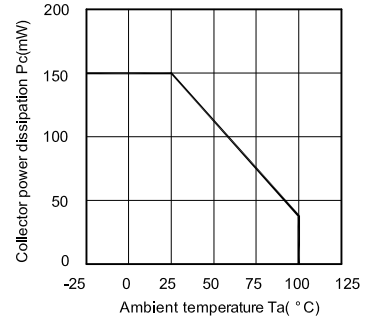


Fig. 9 Response Time vs. Load Resistance




Fig.10 Frequency Response




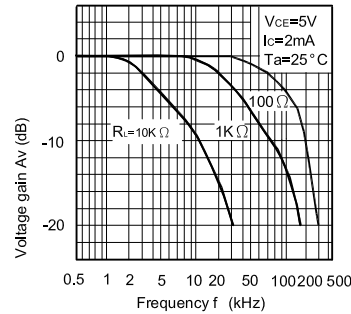



Fig.11 Collector-Emitter Saturation Voltage vs. Forward Current



Test Circuit for Response Time



Test Circuit for Frequency Response



TAPE SPECIFICATIONS (units : mm)


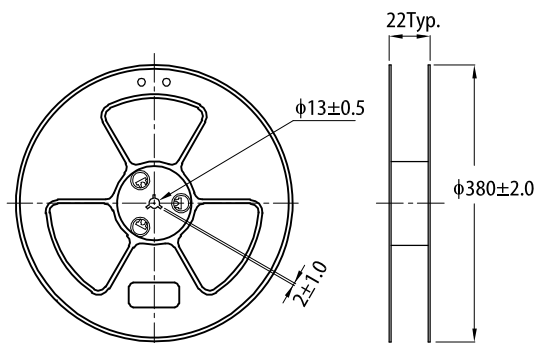


Diagram illustrating the packaging process for Kingbright LEDs:

- Two reels of LEDs.
- Reel with label "Label" and "User Direction of Feed" arrow.
- Bag with label "Label".
- Box labeled "2K / Box".
- Box labeled "6K / Box" with "Kingbright" branding and "Outside Label".



1. The information in this document represents typical usage and is provided for technical reference.
2. The information in this document is subject to change without notice. Please refer to the latest version of this document for the most updated information.
3. Please ensure this product is used in accordance with the electrical and environmental specifications and tolerances listed in this document. If the usage exceeds the specification range, Kingbright will not be responsible for any subsequent issues.
4. Semiconductor components may be damaged by electrical or physical stresses. The buyer of Kingbright products is responsible to use them in accordance with all safety regulations. During development and design, the user should insure Kingbright products are used within the latest specification tolerances, and avoid any situations when the failure of Kingbright products might cause physical harm, death, or property loss.
5. The information in this document may not be reproduced or retransmitted without Kingbright's permission.