

MI DRG. NO.

55H01J

REV.


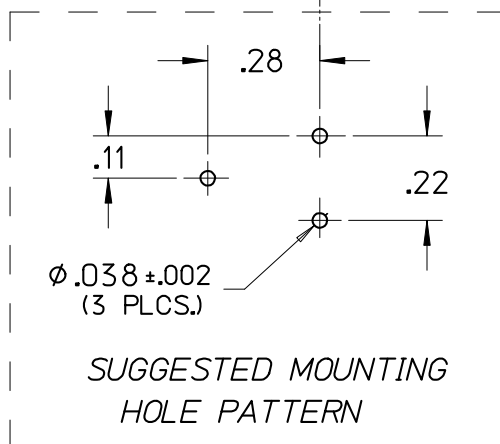
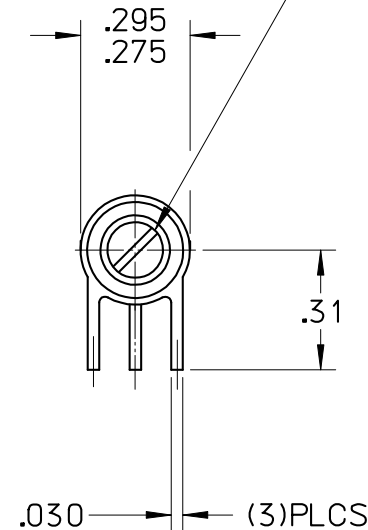
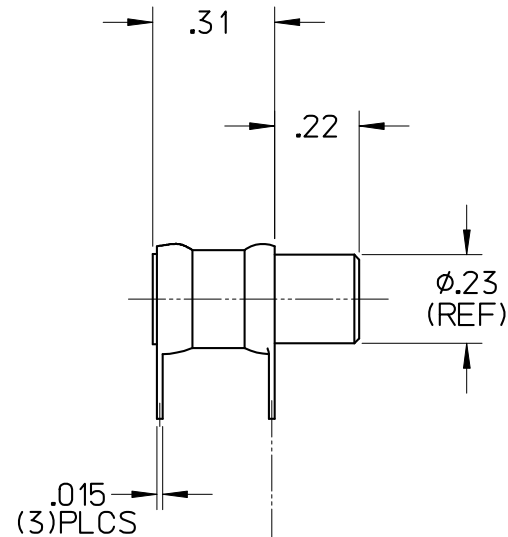
55H01**J****NON-MAGNETIC
TRIMMER CAPACITOR**

SPECIFICATIONS

FILE: AIROUT

CAPACITY RANGE	1.5pF TO 19pF (18 TURNS)
WORKING VOLTAGE	1000 VDC (TEST VOLT. 2000 VDC)
Q @175 MHz	> 1000
INSULATION RESISTANCE	> 10 ⁶ MEGOHMS
TEMPERATURE RANGE	-65°C TO +125°
TUNING TORQUE	1 TO 10 OZ. IN.
ROTATIONAL LIFE	600 CYCLES
ULTRA-HIGH RESOLUTION TUNING	
UNIT CONSTRUCTION: NONMAGNETIC BRASS STRUCTURE WITH TEFLON® DIELECTRIC	
GLAZED ALUMINA INSULATION	
574°F SOLDER USED IN ASSEMBLY	
GOLD, SILVER & CHROMATE FINISH	
NON MAGNETIC TESTING FOR MAGNETIC SUSCEPTIBILITY, IS IN ACCORDANCE WITH JMC SPECIFICATION Q004.	

ACTUAL SIZE

ADJUSTING SLOT
.020 W X .14**JOHANSON MANUFACTURING CORPORATION**
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL

J	9/25/15	CZ	MAI	MAI	001346
H	3/13/14	RJV	RJV	3/13/14 MAI	001216
LEVEL	DATE	DRN.	CHK.	APP.	ECN
REVISIONS					
DRN.	MLD	CHK.	TAM	APP.	JHT
DATE	DATE	DATE	DATE	DATE	DATE
08/28/01	08/29/01	08/29/01	08/29/01	08/29/01	08/29/01
					SCALE 2" = 1"
					.XX ± .015 .XXX ± .005