

# RADIAL LEADS

## SkyCap®/AR Automotive Series - C0G (NPO) Dielectric



### GENERAL INFORMATION

#### AR Series

Conformally Coated Radial Leaded MLC

Temperature Coefficients: C0G (NPO)


200, 100, 50 Volts

Case Material: Epoxy

Lead Material: RoHS Compliant, 100% Tin

Qualified: to AEC-Q200, PPAP Available

Temperature Range: up to 125°C

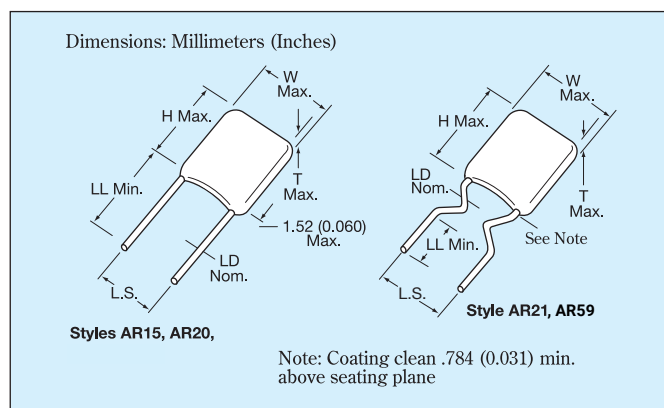

Drawings are for illustrative purposes only.  
Actual lead form shape could vary within stated tolerances based on body size.

### HOW TO ORDER

AR21

5

A

104

J

4

R

TR1

Style

Voltage

5 = 50V  
1 = 100V  
2 = 200V

Temperature Coefficient

A = C0G (NPO)

Capacitance

First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF use "R" in place of decimal point, e.g., 1R4 = 1.4pF)

Capacitance Tolerance

C0G (NPO):  
C =  $\pm 0.25\text{pF}$   
D =  $\pm 0.5\text{pF}$   
F =  $\pm 1\%$  (>50pF only)  
G =  $\pm 2\%$  (>25pF only)  
J =  $\pm 5\%$   
K =  $\pm 10\%$

Failure Rate

4 = AEC-Q200

Leads

R = RoHS

Packaging


Blank: Bulk Packaging 1.0" minimum of lead length  
T: Trimmed leads .230"  $\pm$  .030"  
Bulk packaging  
TR1: Tape and Reel Packaging  
AP1: Ammopack packaging

See packaging specification pages 35-36




### MARKING

FRONT



BACK



### PACKAGING REQUIREMENTS

	Quantity per Bag
AR15, 20, 21, 07, 29, 59	1000 Pieces

Note: AR15, 20, 21, 07, 29, and 59 are available on tape and reel per EIA specifications RS-468. See pages 35 and 36.

# RADIAL LEADS

## SkyCap®/AR Automotive Series - C0G (NPO) Dielectric



### SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

Style		AR15			AR20			AR21		
"Insertable"		AR07			AR29			AR59		
Width (W)		3.81 (.150)			5.08 (.200)			5.08 (.200)		
Height (H)		3.81 (.150)			5.08 (.200)			5.08 (.200)		
Thickness (T)		2.54 (.100)			3.175 (.125)			3.175 (.125)		
Lead Spacing (L.S.)		2.54 (.100)			2.54 (.100)			5.08 (.200)		
Lead Diameter (L.D.)		.508 (.020)			.508 (.020)			.508 (.020)		
Cap. in. pF	Industry Preferred Values in Blue	WVDC			WVDC			WVDC		
		200	100	50	200	100	50	200	100	50
1	AR-----A1R0D4R									
10	AR-----A100K4R									
15	AR-----A150K4R									
22	AR-----A220K4R									
33	AR-----A330K4R									
39	AR-----A390K4R									
47	AR-----A470K4R									
68	AR-----A680K4R									
100	AR-----A101K4R									
150	AR-----A151K4R									
220	AR-----A221K4R									
330	AR-----A331K4R									
390	AR-----A391K4R									
470	AR-----A471K4R									
680	AR-----A681K4R									
1,000	AR-----A102K4R									
1,500	AR-----A152K4R									
2,200	AR-----A222K4R									
3,900	AR-----A392K4R									
4,700	AR-----A472K4R									
6800	AR-----A682K4R									
8200	AR-----A822K4R									

#### Notes:

"Insertable" make reference to alternative KYOCERA AVX style using the same range of capacitance available on the matrix.

For others Styles, voltages, tolerance and lead lengths see Skycap catalog or contact factory.

Others capacitance values available upon special request.

Others styles available: AR12, AR14, AR62, AR89.

# RADIAL LEADS

## SkyCap®/AR Automotive Series - X7R Dielectric

### GENERAL INFORMATION

#### AR Series

Conformally Coated Radial Leaded MLC

Temperature Coefficients: X7R


100, 50 Volts

Case Material: Epoxy

Lead Material: RoHS Compliant, 100% Tin

Qualified: to AEC-Q200, PPAP Available

Temperature Range: up to 125°C

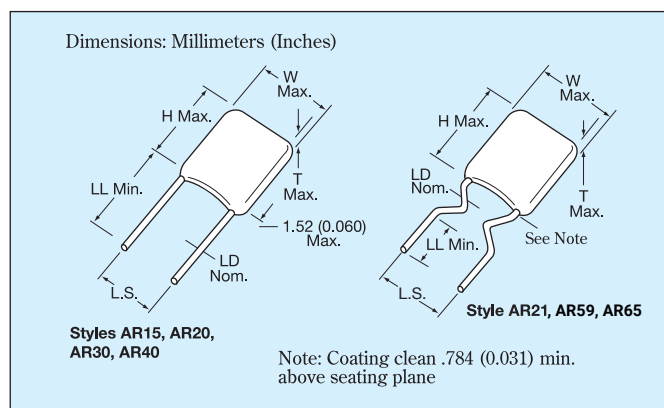

Drawings are for illustrative purposes only.  
Actual lead form shape could vary within stated tolerances based on body size.

### HOW TO ORDER

AR21

5

C

104

M

4

R

TR1

Style

Voltage

5 = 50V  
1 = 100V

Temperature Coefficient

C = X7R

Capacitance

First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF use "R" in place of decimal point, e.g., 1R4 = 1.4pF.)

Capacitance Tolerance

X7R:  
J = ±5%  
K = ±10%  
M = ±20%

Failure Rate

4 = AEC-Q200

Leads

R = RoHS

Packaging


Blank: Bulk Packaging 1.0" minimum of lead length  
T: Trimmed leads .230" ± .030" Bulk packaging  
TR1: Tape and Reel Packaging  
AP1: Ammopack packaging

See packaging specification pages 33-34




### MARKING

FRONT



BACK



### PACKAGING REQUIREMENTS

	Quantity per Bag
AR07, 15, 20, 29, 21, 59, 30, 65	1000 Pieces
AR40, 75	500 Pieces

Note: All styles above are available on tape and reel per EIA specifications RS-468. See pages 33 and 34.

# RADIAL LEADS

## SkyCap®/AR Automotive Series - X7R Dielectric



### SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

		Dimension in millimetre (mm)									
Style		AR15		AR20		AR21		AR30		AR40	
"Insertable"		AR07		AR29		AR59		AR65		AR75	
Width (W)		3.81 (.150)		5.08 (.200)		5.08 (.200)		7.62 (.300)		10.16 (.400)	
Height (H)		3.81 (.150)		5.08 (.200)		5.08 (.200)		7.62 (.300)		10.16 (.400)	
Thickness (T)		2.54 (.100)		3.175 (.125)		3.175 (.125)		3.81 (.150)		3.81 (.150)	
Lead Spacing (L.S.)		2.54 (.100)		2.54 (.100)		5.08 (.200)		5.08 (.200)		5.08 (.200)	
Lead Diameter (L.D.)		.508 (.020)		.508 (.020)		.508 (.020)		.508 (.020)		.508 (.020)	
Cap. in. pF	Industry Preferred Values in Blue	WVDC		WVDC		WVDC		WVDC		WVDC	
		100	50	100	50	100	50	100	50	100	50
470	AR----C471K4R										
1000	AR----C102K4R										
1500	AR----C152K4R										
2200	AR----C222K4R										
3300	AR----C332K4R										
4700	AR----C472K4R										
6800	AR----C682K4R										
10,000	AR----C103K4R										
15,000	AR----C153K4R										
22,000	AR----C223K4R										
33,000	AR----C333K4R										
47,000	AR----C473K4R										
68,000	AR----C683K4R										
100,000	AR----C104K4R										
150,000	AR----C154K4R										
220,000	AR----C224K4R										
330,000	AR----C334K4R										
390,000	AR----C394K4R										
470,000	AR----C474K4R										
680,000	AR----C684K4R										
1.0 uF	AR----C105K4R										
4,700,000	AR----C475K4R										
6,800,000	AR----C685K4R										
10.0 uF	AR----C106K4R										

 = Extended range with 0.150" thickness maximum

Notes:

"Insertable" make reference to alternative KYOCERA AVX style using the same range of capacitance available on the matrix.

For others Styles, voltages, tolerance and lead lengths see Skycap catalog or contact factory.

Others capacitance values available upon special request.

Others styles available: AR12, AR14, AR62, AR89, AR32, AR38.

# RADIAL LEADS

## SkyCap®/AR Automotive Series - X7R Dielectric High Voltage



### GENERAL INFORMATION

#### AR Series

Conformally Coated Radial Leaded MLC

Temperature Coefficients: X7R


3000, 2000, 1000 Volts

Case Material: Epoxy

Lead Material: RoHS Compliant, 100% Tin

Qualified: to AEC-Q200, PPAP Available

Temperature Range: up to 125°C

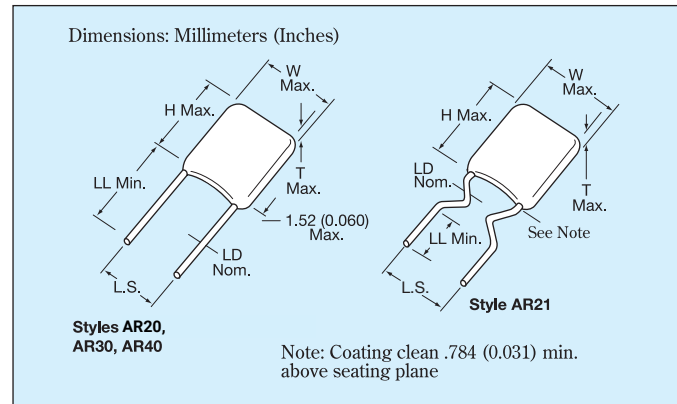

Drawings are for illustrative purposes only.  
Actual lead form shape could vary within stated tolerances based on body size.

### HOW TO ORDER

AR21

A

C

104

M

4

R

TR1

Style

Voltage

A = 1000V  
G = 2000V  
H = 3000V

Temperature Coefficient

C = X7R

Capacitance

First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF use "R" in place of decimal point, e.g., 1R4 = 1.4pF.)

Capacitance Tolerance

X7R:  
J = ±5%  
K = ±10%  
M = ±20%

Failure Rate

4 = AEC-Q200

Leads

R = RoHS

Packaging


Blank: Bulk Packaging 1.0" minimum of lead length  
T: Trimmed leads .230" ± .030" Bulk packaging  
TR1: Tape and Reel Packaging  
AP1: Ammopack packaging

See packaging specification pages 33-34




### MARKING

FRONT



BACK



### PACKAGING REQUIREMENTS

	Quantity per Bag
AR20, 21, 30	1000 Pieces
AR40	500 Pieces

Note: AR20, AR21, AR30, and AR40 available on tape and reel per EIA specifications RS-468. See pages 33 and 34.

## RADIAL LEADS

## SkyCap®/AR Automotive Series - X7R Dielectric High Voltage

## SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

	Style	AR20	AR21	AR22	AR27	AR30	
	"Insertable"	AR29	AR59	N/A	N/A	AR65	
Cap. in. pF	Industry Preferred Values in Blue	WVDC	WVDC	WVDC	WVDC	WVDC	
		1000	1000	1000	1000	2000	3000
470	AR____C471K4R						
1000	AR____C102K4R						
1500	AR____C152K4R						
2200	AR____C222K4R						
3300	AR____C332K4R						
4700	AR____C472K4R						
6800	AR____C682K4R						
10,000	AR____C103K4R						
15,000	AR____C153K4R						
22,000	AR____C223K4R						
47,000	AR____C473K4R						
68,000	AR____C683K4R						

For others Styles, voltages, tolerance and lead lengths see Skycap catalog or contact factory.

# RADIAL LEADS

## SkyCap®/AR Automotive Series - X8R Dielectric



### GENERAL INFORMATION

#### AR Series

Conformally Coated Radial Leaded MLC

Temperature Coefficients: X8R


50 Volts

Case Material: Epoxy

Lead Material: Solderable

Qualified: to AEC-Q200

Temperature Range: up to 150°C

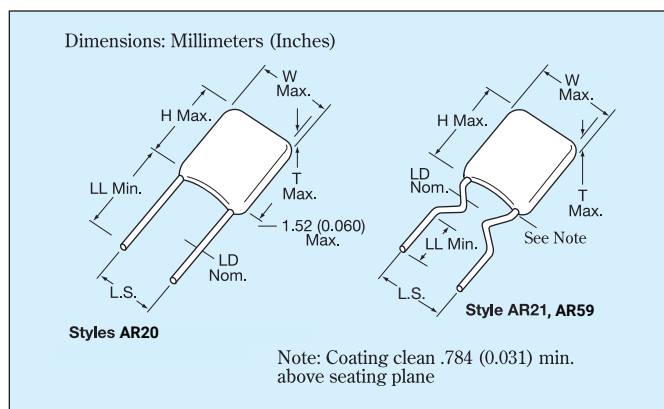

Drawings are for illustrative purposes only.  
Actual lead form shape could vary within stated tolerances based on body size.

### HOW TO ORDER

AR21

5

F

104

M

4

R

TR1

Style

Voltage  
5 = 50V

Temperature  
Coefficient  
F = X8R

Capacitance  
First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF use "R" in place of decimal point, e.g., 1R4 = 1.4pF.)

Capacitance  
Tolerance  
X8R:  
J =  $\pm 5\%$   
K =  $\pm 10\%$   
M =  $\pm 20\%$

Failure Rate  
4 = AEC-Q200

Leads  
R = RoHS


Packaging  
Blank: Bulk Packaging 1.0" minimum of lead length  
T: Trimmed leads .230"  $\pm$  .030" Bulk packaging  
TR1: Tape and Reel Packaging  
AP1: Ammopack packaging

See packaging specification pages 33-34




### MARKING

FRONT



BACK



### PACKAGING REQUIREMENTS

	Quantity per Bag
AR29, 20, 21, 59	1000 Pieces

Note: AR29, 20, 21, 59 are available on tape and reel per EIA specifications RS-468. See pages 33 and 34.

## RADIAL LEADS

## SkyCap®/AR Automotive Series - X8L Dielectric

## SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

		Dimension in Millimeters (Metric)			Dimension in Inches (Imperial)		
Style		AR20			AR21		
"Insertable"		AR29			AR59		
Width (W)		5.08 (.200)			5.08 (.200)		
Height (H)		5.08 (.200)			5.08 (.200)		
Thickness (T)		3.175 (.125)			3.175 (.125)		
Lead Spacing (L.S.)		2.54 (.100)			5.08 (.200)		
Lead Diameter (L.D.)		.508 (.020)			.508 (.020)		
Cap. in. pF	Industry Preferred Values in Blue	WVDC			WVDC		
		200	100	50	200	100	50
1,000	AR----F102K4R						
10,000	AR----F103K4R						
100,000	AR----F104K4R						
330,000	AR----F334K4R						

Notes:

"Insertable" make reference to alternative KYOCERA AVX style using the same range of capacitance available on the matrix.

For others Styles, voltages, tolerance and lead lengths see Skycap catalog or contact factory.

Others capacitance values available upon special request.

Others styles available: AR14, AR62, AR89.




RADIAL LEADS

SkyCap®/AR Automotive Series - X8L Dielectric



GENERAL INFORMATION

AR Series  
Conformally Coated Radial Leaded MLC  
Temperature Coefficients: X8L  
100, 50 Volts  
Case Material: Epoxy  
Lead Material: Solderable  
Qualified: to AEC-Q200  
Temperature Range: up to 150°C

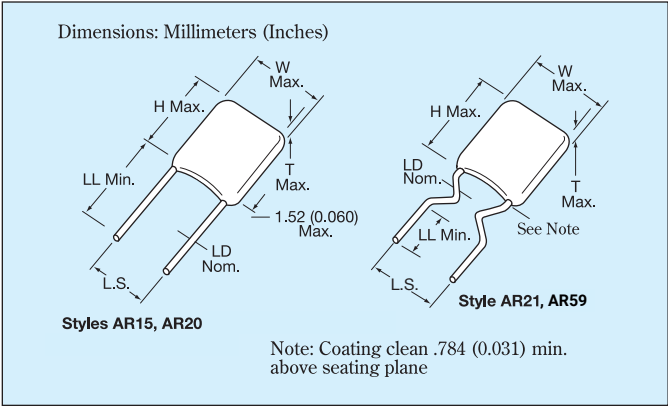

Drawings are for illustrative purposes only.  
Actual lead form shape could vary within stated tolerances based on body size.

HOW TO ORDER

AR21

Style

5

Voltage

5 = 50V

L

Temperature Coefficient

L = X8L

104

Capacitance

First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF use "R" in place of decimal point, e.g., 1R4 = 1.4pF.)

M

Capacitance Tolerance

X8L:  
J = ±5%  
K = ±10%  
M = ±20%

4

Failure Rate

4 = AEC-Q200

R

Leads

R = RoHS


TR1

Packaging

Blank: Bulk Packaging 1.0" minimum of lead length  
T: Trimmed leads .230" ± .030" Bulk packaging  
TR1: Tape and Reel Packaging  
AP1: Ammopack packaging  
  
See packaging specification pages 33-34



MARKING

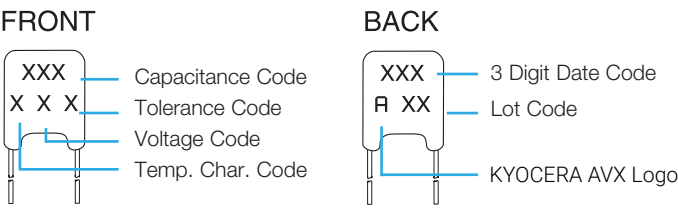

PACKAGING REQUIREMENTS

	Quantity per Bag
AR07, 15, 20, 29, 21, 59	1000 Pieces

Note: AR07, 15, 20, 29, 21, 59 are available on tape and reel per EIA specifications RS-468. See pages 33 and 34.

# RADIAL LEADS

## SkyCap®/AR Automotive Series - X8L Dielectric



### STYLES AND CAPACITANCE SPECIFICATIONS

EIA Characteristics

Style		AR15		AR20		AR21	
"Insertable"		AR07		AR29		AR59	
Cap. in pF	Industry Preferred Values	WVDC		WVDC		WVDC	
		100	50	100	50	100	50
470	AR____L471K4R						
<b>1,000</b>	<b>AR____L102K4R</b>						
1,500	AR____L152K4R						
2,200	AR____L222K4R						
3,300	AR____L332K4R						
4,700	AR____L472K4R						
6,800	AR____L682K4R						
<b>10,000</b>	<b>AR____L103K4R</b>						
15,000	AR____L153K4R						
22,000	AR____L223K4R						
33,000	AR____L333K4R						
47,000	AR____L473K4R						
68,000	AR____L683K4R						
<b>100,000</b>	<b>AR____L104K4R</b>						
150,000	AR____L154K4R						
220,000	AR____L224K4R						
330,000	AR____L334K4R						
390,000	AR____L394K4R						
470,000	AR____L474K4R						
680,000	AR____L684K4R						
<b>1.0 uF</b>	<b>AR____L105K4R</b>						
1,500,000	AR____L155K4R						
2,200,000	AR____L225K4R						
<b>3,300,000</b>	<b>AR____L335K4R</b>						