



SMA Male Right Angle Connector Crimp/Solder Attachment for RG55, RG142, RG223, RG400

RF Connectors Technical Data Sheet

M39012/56-3109

Configuration

- SMA Male Connector
- 50 Ohms
- Right Angle Body Geometry
- Connector Interface Types: RG55, RG142, RG223, RG400
- 5/16 inch Hex

Features

- Max. Operating Frequency 12.4 GHz
- Excellent VSWR of 1.25:1
- Gold Plated Beryllium Copper Contact
- QPL Part

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's M39012/56-3109 SMA male connector is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 12.4 GHz and offers excellent VSWR of 1.25:1. Its right angle body geometry allows for easier connections in tight spaces.

Our SMA male right angle connector M39012/56-3109 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.25:1	
Impedance		50		Ohms

Mechanical Specifications

Size	
Length	0.76 in [19.30 mm]
Width	0.68 in [17.27 mm]
Height	0.31 in [7.92 mm]
Weight	0.02 lbs [9.07 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Crimp/Solder Attachment for RG55, RG142, RG223, RG400 M39012/56-3109](#)



SMA Male Right Angle Connector Crimp/Solder
Attachment for RG55, RG142, RG223, RG400

RF Connectors Technical Data Sheet

M39012/56-3109

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PTFE	
Outer Conductor	Stainless Steel	Gold
Body	Stainless Steel	Gold

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Crimp/Solder Attachment for RG55, RG142, RG223, RG400 M39012/56-3109](#)




SMA Male Right Angle Connector Crimp/Solder
Attachment for RG55, RG142, RG223, RG400


RF Connectors
Technical Data Sheet

M39012/56-3109

Assembly Instruction

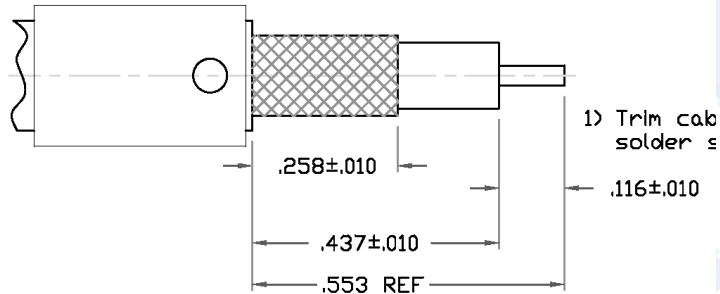

- 1) Trim cable to dimensions shown. Slide solder sleeve back onto cable.

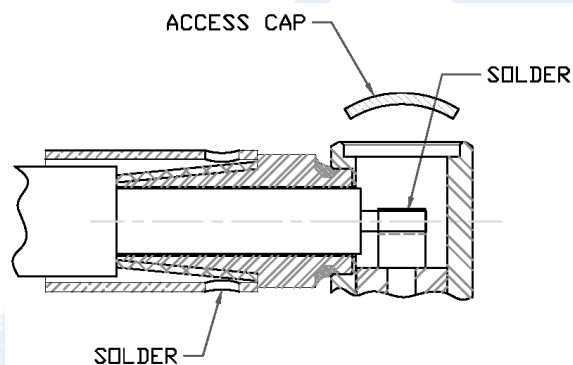

- 2) Insert prepared cable into rear of body, with all braid wires on outside of solder tail. Push cable in until the end of braid touches connector body shoulder and center conductor rests in contact slot. Trim excess braid wires even with shoulder of body.

Slide solder sleeve forward until flush with body and solder braid and sleeve through solder hole in solder sleeve.

Solder center conductor to contact.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Crimp/Solder Attachment for RG55, RG142, RG223, RG400 M39012/56-3109](#)



SMA Male Right Angle Connector Crimp/Solder Attachment for RG55, RG142, RG223, RG400

RF Connectors Technical Data Sheet

M39012/56-3109

SMA Male Right Angle Connector Crimp/Solder Attachment for RG55, RG142, RG223, RG400 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Crimp/Solder Attachment for RG55, RG142, RG223, RG400 M39012/56-3109](https://www.pasternack.com/sma-male-rg55-rg142-rg223-rg400-connector-m39012-56-3109-p.aspx)

URL: <https://www.pasternack.com/sma-male-rg55-rg142-rg223-rg400-connector-m39012-56-3109-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

SMA Male Right Angle Connector Crimp/Solder Attachment for RG55, RG142, RG223, RG400



NOTES:

1. QUALIFIED SUPPLIER CAGE CODE: 00795

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN WHOLE OR PART WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.