

4 Way 2.4mm Power Divider to 50 GHz Rated at 1 Watt

Power Dividers Technical Data Sheet

PE20DV1150

Features

- 4-Way Power Divider
- 2.4mm Female Connectorized Design
- DC to 50 GHz Frequency Range
- Max Power 1 Watt (CW)
- Insertion Loss < 4 dB
- Isolation > 9 dB

Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and Wilkinson power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types such as 2.92mm, 2.4mm, 1.85mm BNC, N and SMA.


The PE20DV1150 is a 4-way power divider that operates from DC to 50 GHz and can handle up to 1 Watt (CW) with 4 dB max insertion loss and 9 dB min isolation. The package interface uses 2.4mm female connectors.

Electrical Specifications

Number of Output Ports 4

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		50	GHz
Impedance		50		Ohms
Input VSWR		1.3:1	2:1	
Output VSWR		2:1	2.5:1	
Insertion Loss		2.5	4	dB
Isolation	9	12		dB
Amplitude Balance		0.4	0.6	dB
Nominal Power Splitting		12		dB
Input Power (CW)			1	Watt
Reverse Power (CW)			0.1	Watts
Input Power (Peak)			10	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way 2.4mm Power Divider to 50 GHz Rated at 1 Watt PE20DV1150](#)



4 Way 2.4mm Power Divider to 50 GHz Rated at 1 Watt

Power Dividers Technical Data Sheet

PE20DV1150

Mechanical Specifications

Size

Length	1.97 in [50.04 mm]
Width	1.64 in [41.66 mm]
Height	0.39 in [9.91 mm]
Weight	0.066 lbs [29.94 g]

Housing Material and Plating

Aluminum

Configuration

Package Type	Connectorized
Input Connector	2.4mm Female
Output Connectors	2.4mm Female

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-50 to +105 deg C

Humidity

100% RH at 35°C, 95%RH at 40°C

Shock

20G for 11msec half sine wave, 3 axis both directions

Vibration

25gRMS (15 degrees 2KHz) endurance, 1 hour per axis

Altitude

30,000 ft. (Epoxy Sealed Controlled environment)

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

4 Way 2.4mm Power Divider to 50 GHz Rated at 1 Watt from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way 2.4mm Power Divider to 50 GHz Rated at 1 Watt PE20DV1150](#)

URL: <https://www.pasternack.com/4-way-2.4mm-power-divider-50-ghz-pe20dv1150-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE20DV1150 CAD Drawing

4 Way 2.4mm Power Divider to 50 GHz Rated at 1 Watt

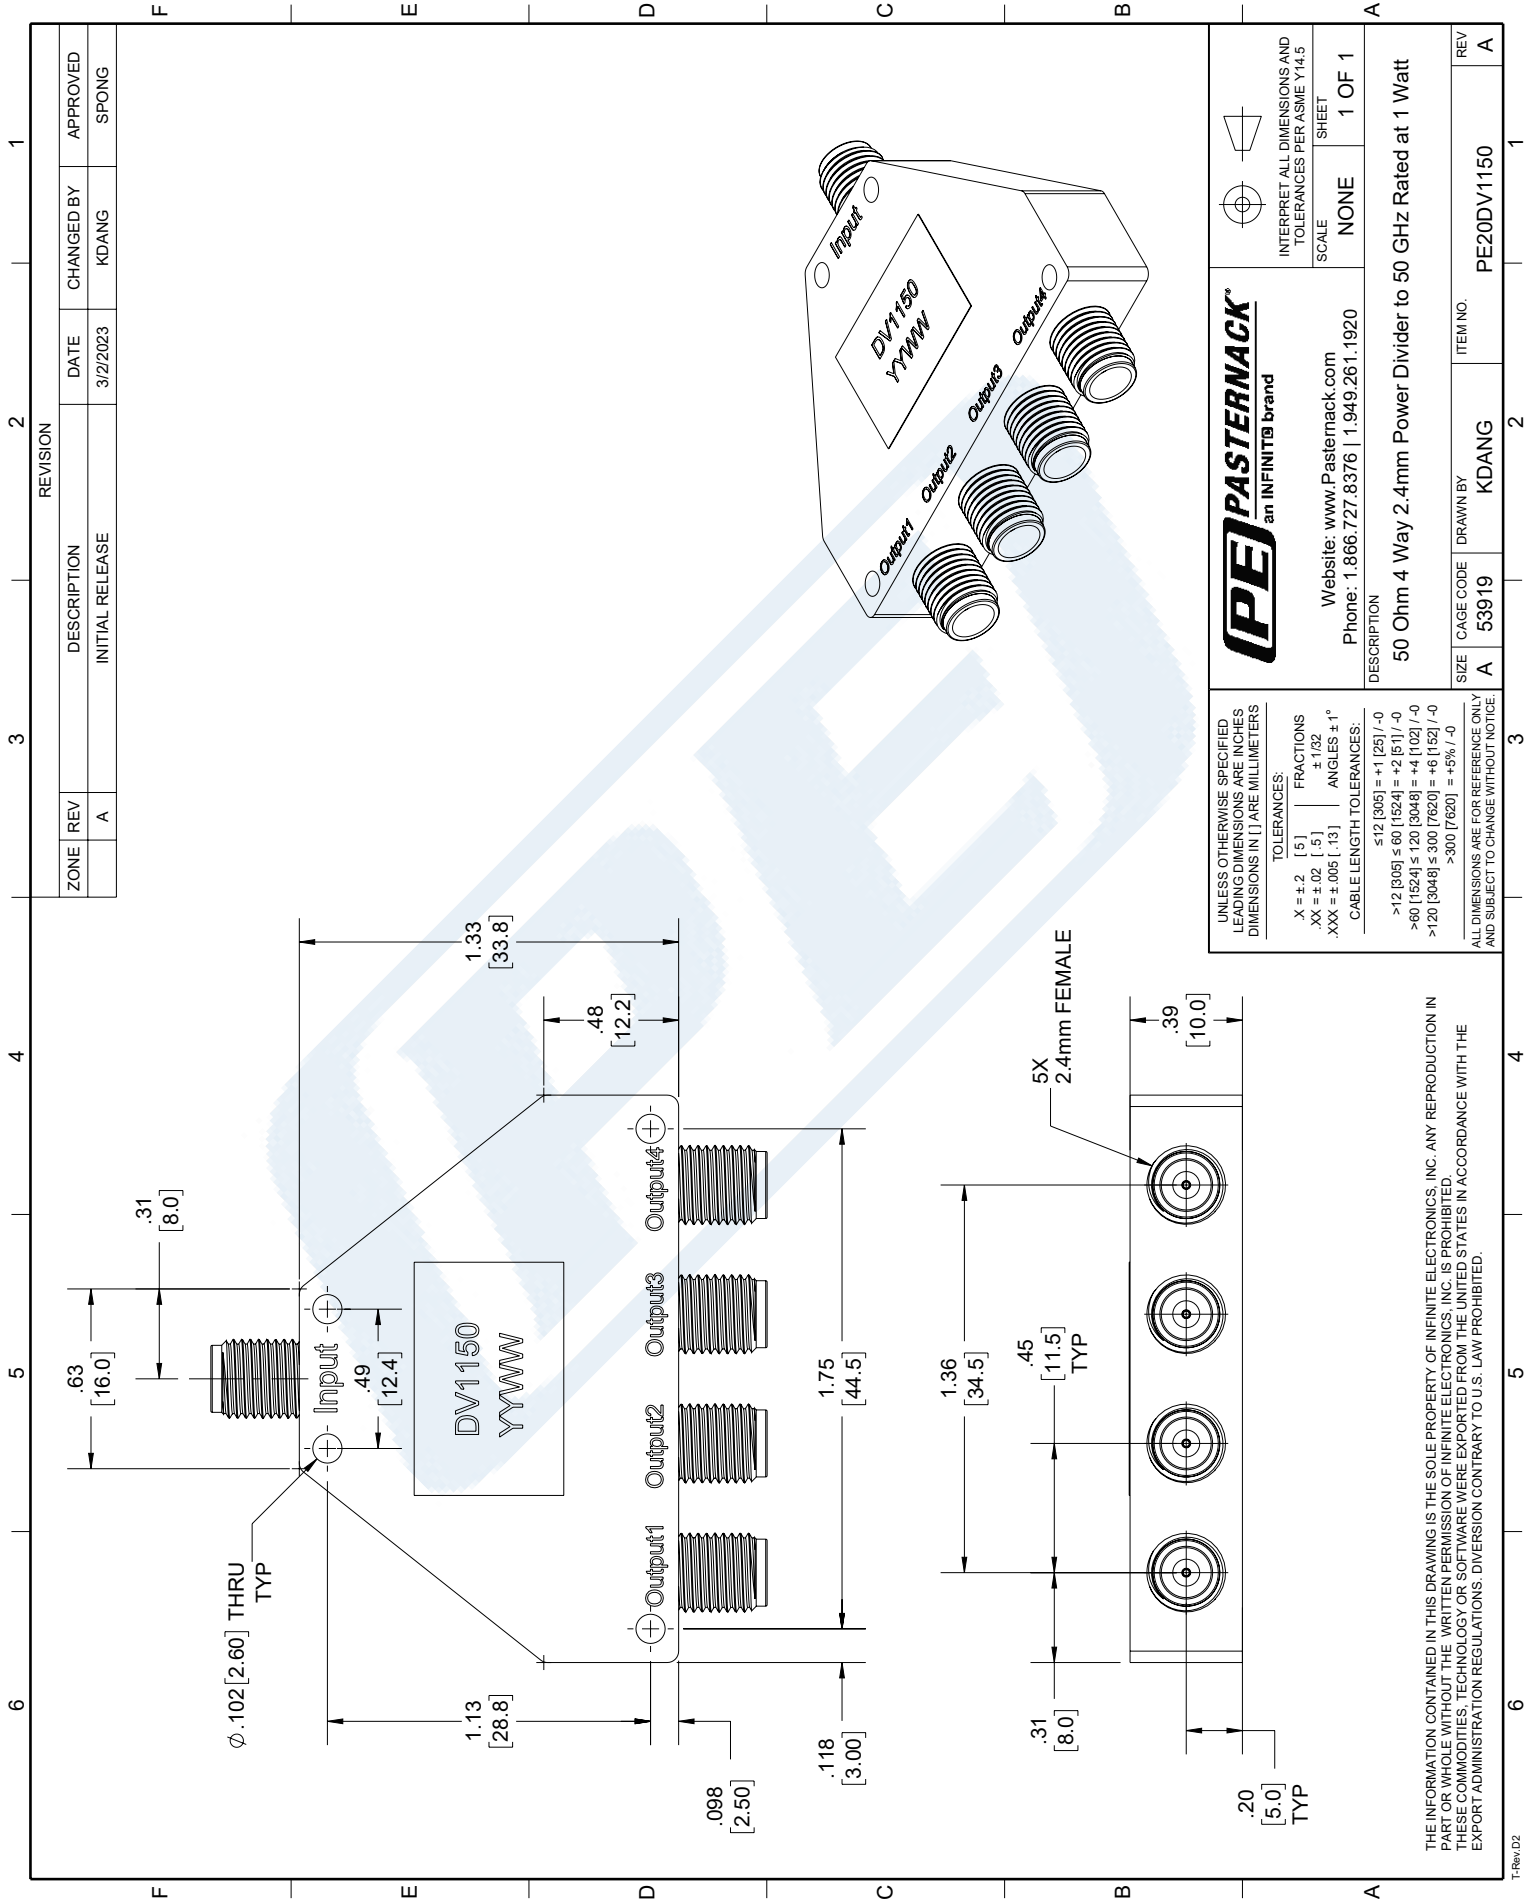

1 2 3 4 5 6

F E D C B A

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	3/2/2023	KDANG	SPONG

REVISION

PE PASTERNAK an INFINITI [®] brand		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
DESCRIPTION 50 Ohm 4 Way 2.4mm Power Divider to 50 GHz Rated at 1 Watt	SCALE NONE	SHEET 1 OF 1
SIZE A	CAGE CODE 53919	ITEM NO. PE20DV1150
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920	DRAWN BY KDANG	REV A

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [5] FRACTIONS
.XX = ±.02 [.5] ±.1/32
XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:

≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev/D2