

## SMA Male to SMA Male Cable 6 Inch Length Using RG316 Coax

### PE3573-6




#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: RG316
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

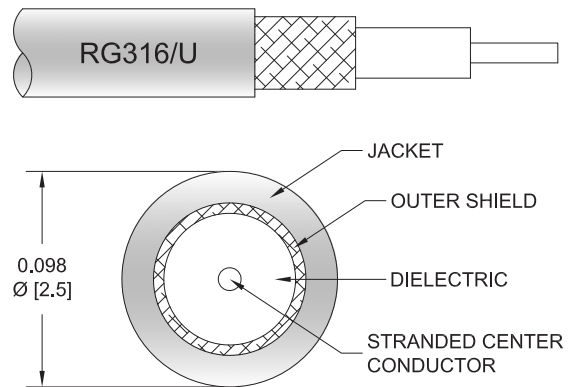

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3573-6 SMA male to SMA male 6 inch cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG316 coax. The PE3573-6 SMA male to SMA male cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

| Description                   | Minimum | Typical      | Maximum | Units                 |
|-------------------------------|---------|--------------|---------|-----------------------|
| Frequency Range               | DC      |              | 3       | GHz                   |
| VSWR                          |         |              | 1.4:1   |                       |
| Velocity of Propagation       |         | 69           |         | %                     |
| Capacitance                   |         | 29.4 [96.46] |         | pF/ft [pF/m]          |
| DC Resistance Inner Conductor |         | 8.41 [27.59] |         | Ohms/1000ft [Ohms/Km] |
| Operating Voltage (AC)        |         |              | 335     | Vrms                  |
| Jacket Spark                  |         |              | 2,000   | Vrms                  |

#### Specifications by Frequency

| Description | F1  | F2   | F3  | F4 | F5 | Units |
|-------------|-----|------|-----|----|----|-------|
| Frequency   | 0.1 | 0.25 | 0.5 | 1  | 3  | GHz   |

## SMA Male to SMA Male Cable 6 Inch Length Using RG316 Coax

### PE3573-6



#### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Insertion Loss (Typ.) | 0.12 | 0.18 | 0.27 | 0.39 | 0.64 |       |

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.10dB x SQRT(Frequency GHz) per connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.021 lbs [9.53 g]

##### Cable

Cable Type RG316  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Shield Layer 1 Silver Plated Copper Braid  
Jacket Material FEP, Tan  
Jacket Diameter 0.102 in [2.59 mm]

#### Connectors

| Description                        | Connector 1      | Connector 2      |
|------------------------------------|------------------|------------------|
| Type                               | SMA Male         | SMA Male         |
| Specification                      | MIL-STD-348A     | MIL-STD-348A     |
| Impedance                          | 50 Ohms          | 50 Ohms          |
| Configuration                      | Straight         | Straight         |
| Contact Material and Plating       | Brass, Gold      | Brass, Gold      |
| Contact Plating Specification      | 30 µin minimum   | 30 µin minimum   |
| Dielectric Type                    | PTFE             | PTFE             |
| Body Material and Plating          | Brass, Nickel    | Brass, Nickel    |
| Body Plating Specification         | 100 µin minimum  | 100 µin minimum  |
| Coupling Nut Material and Plating  | Brass, Nickel    | Brass, Nickel    |
| Coupling Nut Plating Specification | 100 µin minimum  | 100 µin minimum  |
| Hex Size                           | 5/16 inch        | 5/16 inch        |
| Torque                             | 3 in-lbs 0.34 Nm | 3 in-lbs 0.34 Nm |

#### Environmental Specifications

Operating Range Temperature -55 to +165 deg C

## SMA Male to SMA Male Cable 6 Inch Length Using RG316 Coax



### PE3573-6

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:  
Values at 25°C, sea level.

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE3573**      **- xx**      **uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example:    PE3573-12 = 12 inches long cable  
              PE3573-100cm = 100 cm long cable

SMA Male to SMA Male Cable 6 Inch Length Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 6 Inch Length Using RG316 Coax PE3573-6](#)

URL: <https://www.pasternack.com/sma-male-sma-male-rg316u-cable-assembly-pe3573-6-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3573-6 CAD Drawing
SMA Male to SMA Male Cable 6 Inch Length Using RG316 Coax

