



4.1/9.5 Mini DIN Male to 4.3-10 Female
Low PIM Cable 12 Inch Length Using TFT-402-LF Coax
Using Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C8278-12

Configuration

- Connector 1: 4.1/9.5 Mini DIN Male
- Connector 2: 4.3-10 Female
- Cable Type: TFT-402-LF

Features

- Max Frequency 3 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

Description

Pasternack's PE3C8278-12 4.1/9.5 Mini DIN male to 4.3-10 female 12 inch cable using TFT-402-LF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 4.1/9.5 Mini DIN to 4.3-10 cable assembly has a male to female gender configuration with 50 ohm flexible TFT-402-LF coax. The PE3C8278-12 4.1/9.5 Mini DIN male to 4.3-10 female cable assembly operates to 3 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	80			dB
Passive Intermodulation			-160	dBc

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.1/9.5 Mini DIN Male to 4.3-10 Female Low PIM Cable 12 Inch Length Using TFT-402-LF Coax Using Times Microwave Components PE3C8278-12](#)



4.1/9.5 Mini DIN Male to 4.3-10 Female
Low PIM Cable 12 Inch Length Using TFT-402-LF Coax
Using Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C8278-12

Capacitance 26.7 [87.6] pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.17	0.21	0.26	0.32	0.49	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the male connector and 0.1*SQRT(FGHz) dB for the female connector.

Mechanical Specifications

Cable Assembly

Length* 12 in [304.8 mm]
Diameter 0.866 in [22 mm]

Cable

Cable Type TFT-402-LF
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper
Dielectric Type PTFE
Number of Shields 2
Jacket Material FEP, Blue
Jacket Diameter 0.16 in [4.06 mm]

One Time Minimum Bend Radius 0.75 in [19.05 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.1/9.5 Mini DIN Male to 4.3-10 Female Low PIM Cable 12 Inch Length Using TFT-402-LF Coax Using Times Microwave Components PE3C8278-12](#)



4.1/9.5 Mini DIN Male to 4.3-10 Female
Low PIM Cable 12 Inch Length Using TFT-402-LF Coax
Using Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C8278-12

Connectors

Description	Connector 1	Connector 2
Type	4.1/9.5 Mini DIN Male	4.3-10 Female
Impedance	50 Ohms	50 Ohms
Mating Cycles		500
Contact Material and Plating	Brass, Silver	Bronze, Silver
Contact Plating Specification	5 µm	200 µin
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Tri-Metal
Outer Conductor Plating Specification		80 µin
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	2 µm	80 µin
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	5 µm	
Torque	106 in-lbs [11.98 Nm]	

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.1/9.5 Mini DIN Male to 4.3-10 Female Low PIM Cable 12 Inch Length Using TFT-402-LF Coax Using Times Microwave Components PE3C8278-12](#)



4.1/9.5 Mini DIN Male to 4.3-10 Female
Low PIM Cable 12 Inch Length Using TFT-402-LF Coax
Using Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C8278-12

How to Order

Part Number Configuration:

PE3C8278

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C8278-12 = 12 inches long cable
PE3C8278-100cm = 100 cm long cable

4.1/9.5 Mini DIN Male to 4.3-10 Female Low PIM Cable 12 Inch Length Using TFT-402-LF Coax Using Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.1/9.5 Mini DIN Male to 4.3-10 Female Low PIM Cable 12 Inch Length Using TFT-402-LF Coax Using Times Microwave Components PE3C8278-12](https://www.pasternack.com/4.1-9.5-male-4.3-10-female-tft-402-lf-cable-assembly-pe3c8278-12-p.aspx)


URL: <https://www.pasternack.com/4.1-9.5-male-4.3-10-female-tft-402-lf-cable-assembly-pe3c8278-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C8278-12 CAD Drawing

4.1/9.5 Mini DIN Male to 4.3-10 Female Low PIM Cable 12 Inch Length
Using TFT-402-LF Coax Using Times Microwave Components

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/30/21	SRAUTUS

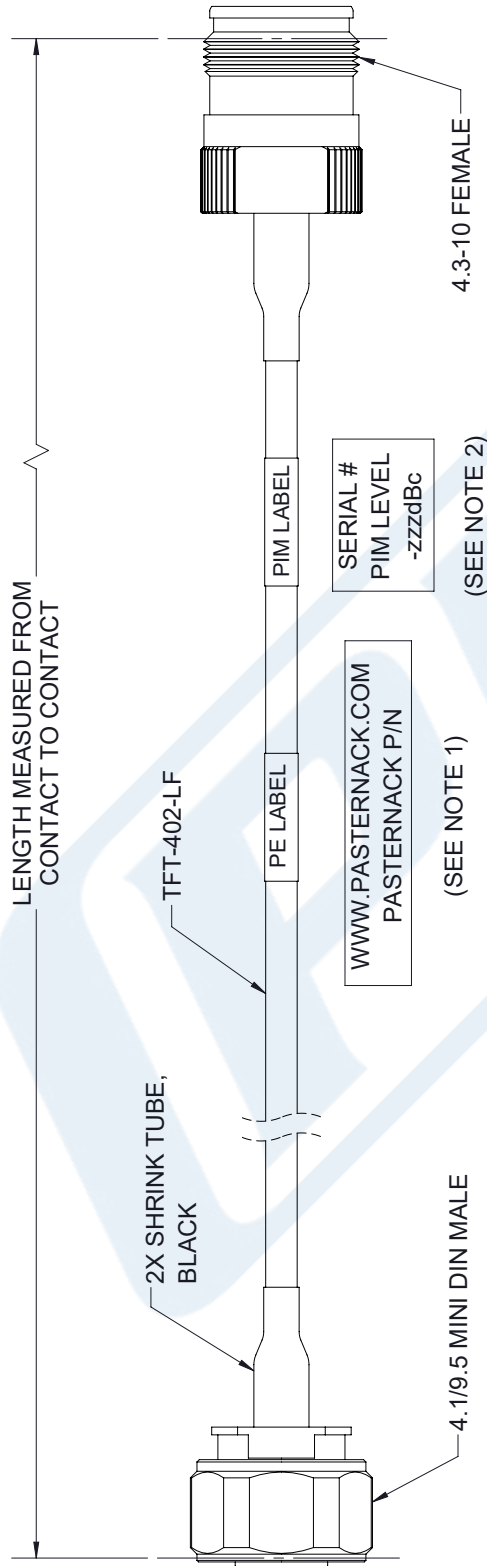

NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END
12" FROM THE FRONT OF THE CONNECTOR.
2. PIM LABEL 6" FROM CABLE END 1 PLACE.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	FRACTIONS
.X = ± .2	[.08]
.XX = ± .02	[.51]
.XXX = ± .005	[.13]
ANGLES ± 1°	
CABLE LENGTH (L) TOLERANCES:	
L ≤ 12 [305] = +1 [25] / -0	
12 [305] < L ≤ 60 [1524] = +2 [51] / -0	
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	
300 [7620] < L = +5% / -0	
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	

PE PASTERNAK an INFINITI [®] brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com	
SIZE	CAGE CODE
A	53919
DRAWN BY	DMAY
ITEM NO.	PE3C8278
REV	A

THIRD-ANGLE PROJECTION THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.	
SHEET	1 OF 1
SCALE	N/A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.