



## Pigtail Test Probe Cable SMA Female to Pre-Trimmed Lead 6 Inch Length Using PE-SR047TN Coax, RoHS

### RF Cable Assemblies Technical Data Sheet

PE3CA1106-6

#### Configuration

- Connector 1: SMA Female
- Connector 2: Trimmed Lead
- Cable Type: Tinned 047

#### Features

- Max Frequency 6 GHz
- Tinned Copper Jacket
- 100% RF Tested prior to final trim
- 1.35 Max VSWR to 6 GHz
- 100% High Pot Tested to 500V
- .047 Diameter Semi Rigid coax
- Individually packed in protective tube

#### Applications

- General Purpose
- Laboratory Use
- Used as an RF Test Probe to 6 GHz
- RF PCB board measurements
- Signal injection

#### Description

These SMA Female to pre-trimmed cables assemblies are designed to be used as convenient test probes. The pre-trimmed end of the cable assembly has an exposed center conductor and dielectric and is ready for use. A common Research and development application is to solder the trimmed end of the cable to an exposed microstrip trace to inject a signal or to measure a signal of interest. Each cable assembly is individually packaged in a reusable protective tube. These test probes have been 100% RF tested as a two ended assembly prior to trimming in order to verify the assemblies perform to 6 GHz with a maximum VSWR of 1.35:1. Flush Cutt Test Probes are also available.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.35:1	
Operating Voltage (AC)			500	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	6				GHz
Insertion Loss (Typ.)	0.17	0.4				dB
VSWR (Max.)	1.35:1	1.35:1				

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Pigtail Test Probe Cable SMA Female to Pre-Trimmed Lead 6 Inch Length Using PE-SR047TN Coax, RoHS PE3CA1106-6](#)



Pigtail Test Probe Cable SMA Female to Pre-Trimmed  
Lead 6 Inch Length Using PE-SR047TN Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3CA1106-6

**Mechanical Specifications**

**Cable Assembly**

Weight 0.018 lbs [8.16 g]

**Cable**

Cable Type Tinned 047  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Jacket Material Tinned Copper  
Jacket Diameter 0.047 in [1.19 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Female	Trimmed Lead
Impedance	50 Ohms	0 Ohms
Outer Conductor Material and Plating	Brass, Gold	
Body Material and Plating	Brass, Gold	

**Environmental Specifications**

**Temperature**

Operating Range +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Pigtail Test Probe Cable SMA Female to Pre-Trimmed Lead 6 Inch Length Using PE-SR047TN Coax, RoHS PE3CA1106-6](#)



## Pigtail Test Probe Cable SMA Female to Pre-Trimmed Lead 6 Inch Length Using PE-SR047TN Coax, RoHS

### RF Cable Assemblies Technical Data Sheet

PE3CA1106-6

#### How to Order

Part Number Configuration:

**PE3CA1106**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3CA1106-12 = 12 inches long cable  
PE3CA1106-100cm = 100 cm long cable


Pigtail Test Probe Cable SMA Female to Pre-Trimmed Lead 6 Inch Length Using PE-SR047TN Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Pigtail Test Probe Cable SMA Female to Pre-Trimmed Lead 6 Inch Length Using PE-SR047TN Coax, RoHS PE3CA1106-6](https://www.pasternack.com/sma-female-trimmed-lead-sexless-tinned-047-cable-assembly-pe3ca1106-6-p.aspx)

URL: <https://www.pasternack.com/sma-female-trimmed-lead-sexless-tinned-047-cable-assembly-pe3ca1106-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3CA1106-6 CAD Drawing**  
Pigtail Test Probe Cable SMA Female to Pre-Trimmed Lead  
6 Inch Length Using PE-SR047TN Coax, RoHS

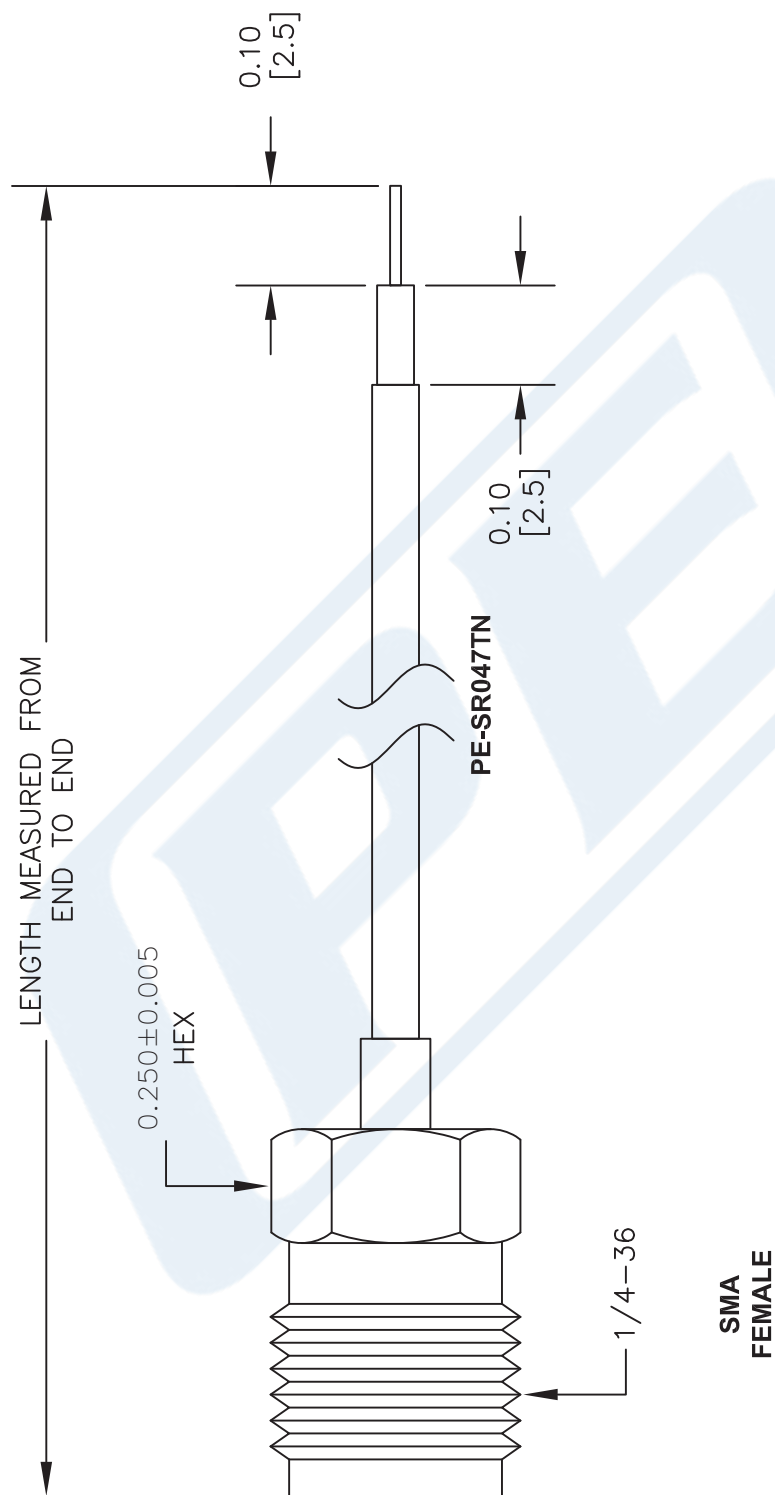

DWG TITLE

**PE3CA1106**

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

FSCM NO. 53919

CAD FILE 050815

SCALE N/A

SIZE A

2233

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)