



N Female to Mini UHF Male Low Loss Cable Using LMR-195 Coax with HeatShrink

TECHNICAL DATA SHEET


PE3W02667/HS

Configuration

- Connector 1: N Female
- Connector 2: Mini UHF Male
- Cable Type: LMR-195
- Coax Flex Type: Flexible

Features

- Max Frequency 2.5 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

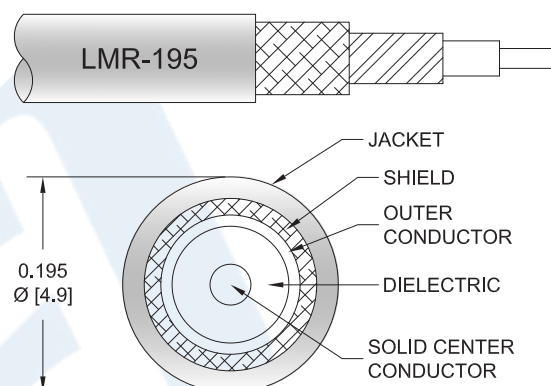

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W02667/HS type N female to Mini UHF male cable using LMR-195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to Mini UHF cable assembly has a female to male gender configuration with 50 ohm flexible LMR-195 coax. The PE3W02667/HS type N female to Mini UHF male cable assembly operates to 2.5 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to Mini UHF Male Low Loss Cable Using LMR-195 Coax with HeatShrink PE3W02667/HS](#)



N Female to Mini UHF Male Low Loss Cable Using LMR-195 Coax with HeatShrink

TECHNICAL DATA SHEET

PE3W02667/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2.5	GHz
VSWR			1.4:1	
Velocity of Propagation		80		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.6 [24.93]		Ω /1000ft [Ω /Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ω /1000ft [Ω /Km]
Jacket Spark			3,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	2500	MHz	
PE3W02667/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.03	0.06	0.08	0.12	0.19	dB/ft	
			0.12	0.19	0.27	0.39	0.63	dB/m	
PE3W02667/HS-12	12 inch	Insertion Loss (Typ.)	0.24	0.26	0.29	0.32	0.39	dB	0.111
PE3W02667/HS-24	24 inch	Insertion Loss (Typ.)	0.27	0.32	0.37	0.44	0.58	dB	0.134
PE3W02667/HS-36	36 inch	Insertion Loss (Typ.)	0.31	0.38	0.45	0.55	0.77	dB	0.156
PE3W02667/HS-48	48 inch	Insertion Loss (Typ.)	0.34	0.43	0.53	0.67	0.96	dB	0.178
PE3W02667/HS-60	60 inch	Insertion Loss (Typ.)	0.37	0.49	0.61	0.78	1.15	dB	0.2

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.058 pounds
Additional Weight per Inch:	0.00075 pounds

Mechanical Specifications

Cable Assembly

Weight 0.111 lbs [50.35 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to Mini UHF Male Low Loss Cable Using LMR-195 Coax with HeatShrink PE3W02667/HS](#)



N Female to Mini UHF Male Low Loss Cable
Using LMR-195 Coax with HeatShrink

TECHNICAL DATA SHEET

PE3W02667/HS

Cable

Cable Type	LMR-195
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

Connectors

Description	Connector 1	Connector 2
Type	N Female Threaded	Mini UHF Male Threaded
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Phosphor Bronze, Gold	Brass, Gold
Contact Plating Specification		30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Nickel
Body Plating Specification		100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to Mini UHF Male Low Loss Cable Using LMR-195 Coax with HeatShrink PE3W02667/HS](#)



N Female to Mini UHF Male Low Loss Cable
Using LMR-195 Coax with HeatShrink

TECHNICAL DATA SHEET

PE3W02667/HS

How to Order

Part Number Configuration:

PE3W02667/HS

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W02667/HS-12 = 12 inches long cable
PE3W02667/HS-100cm = 100 cm long cable

N Female to Mini UHF Male Low Loss Cable Using LMR-195 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to Mini UHF Male Low Loss Cable Using LMR-195 Coax with HeatShrink PE3W02667/HS](#)

URL: <https://www.pasternack.com/n-female-to-mini-uhf-male-low-loss-cable-using-lmr-195-with-heatshrink-pe3w02667-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5

6

1

2

3

4

5

6

1

REVISION

DESCRIPTION

DATE

CHANGED BY

APPROVED

INITIAL RELEASE

10/2/2023

KDANG

AGANWANI

ZONE

REV

A

INITIAL RELEASE

10/2/2023

KDANG

AGANWANI

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2