



SMC Jack Connector Solder Attachment 0.062 inch
End Launch PCB, .020 inch x .010 inch Contact

TECHNICAL DATA SHEET

PE44136

SMC Jack Connector Solder Attachment 0.062 inch End Launch PCB, .020 inch x .010 inch Contact

Configuration

Connector	SMC Jack
Connector Specification	MIL-C-39012
Connector Interface Type	0.062 inch End Launch
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight

Electrical Specifications

Impedance, Ohms	50
-----------------	----

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

Size

Length, in [mm]	0.562 [14.27]
Width/Dia., in [mm]	0.375 [9.53]
Height, in [mm]	0.312 [7.92]
Weight, lbs [g]	0.004 [1.81]

Connector

Type	SMC Jack
Contact Material and Plating	Gold
Contact Plating Specification	MIL-G-45204
Body Material and Plating	Brass, Gold
Body Plating Specification	MIL-G-45204
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMC Jack Connector Solder Attachment 0.062 inch End Launch PCB, .020 inch x .010 inch Contact PE44136](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMC Jack Connector Solder Attachment 0.062 inch
End Launch PCB, .020 inch x .010 inch Contact

TECHNICAL DATA SHEET

PE44136

Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMC Jack Connector Solder Attachment 0.062 inch End Launch PCB, .020 inch x .010 inch Contact from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMC Jack Connector Solder Attachment 0.062 inch End Launch PCB, .020 inch x .010 inch Contact PE44136](http://www.pasternack.com/smc-jack-standard-0.062-end-launch-connector-pe44136-p.aspx)

URL: <http://www.pasternack.com/smc-jack-standard-0.062-end-launch-connector-pe44136-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE44136 CAD Drawing

SMC Jack Connector Solder Attachment 0.062 inch End
Launch PCB, .020 inch x .010 inch Contact

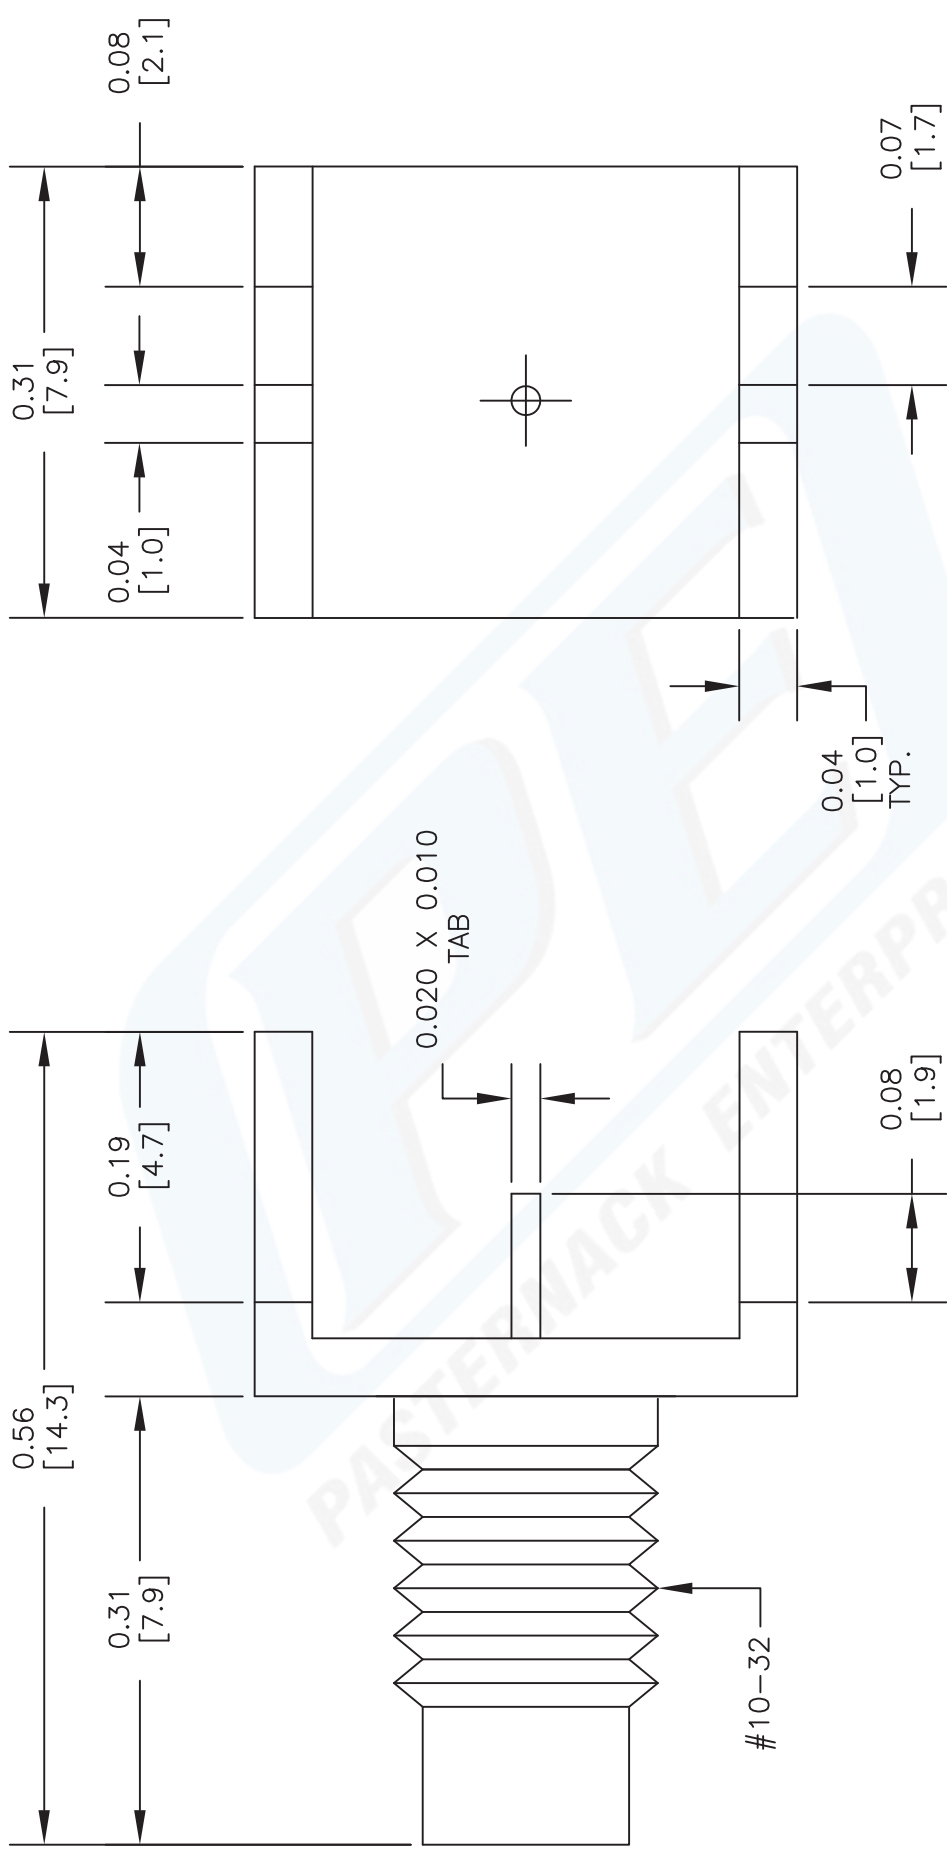

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE44136

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 081513 SCALE N/A SIZE A 2233