



MMBX Jack Snap-On Connector Solder Attachment Surface Mount PCB, With Female Center Contact, 1 Reel Contains 750 pieces

RF Connectors Technical Data Sheet

PE45262TR750

Configuration

- Snap-On MMBX Jack Connector
- 50 Ohms
- Straight Body Geometry
- Surface Mount Interface Type
- Solder Attachment

Features

- Max. Operating Frequency 12.4 GHz
- Excellent VSWR of 1.06:1
- Gold Plated Brass Contact
- Blind Mate Connection
- Small circuit footprint for high density applications
- packaging available for pick and place circuit board manufacturing
- Mechanical misalignment tolerance of 4.5deg/0.7mm Max

Applications

- General Purpose Test
- PCB Applications
- Circuit board test point
- PCB applications
- Low cost blind mate interconnect
- Board to board applications requiring multiple coaxial connections

Description

Pasternack's PE45262TR750 MMBX jack snap-on connector with solder attachment for surface mount PCB is part of our full line of RF components available for same-day shipping. Our MMBX jack connector operates up to a maximum frequency of 12.4 GHz and offers excellent VSWR of 1.06:1.

Our MMBX jack connector PE45262TR750 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.06:1	
Insertion Loss			0.42	dB
Operating Voltage (DC)			330	Vdc
Dielectric Withstanding Voltage (DC)			1,000	Vdc
Insulation Resistance	1,000			MOhms

Electrical Specification Notes:
 MMBX Jack has a female center contact

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMBX Jack Snap-On Connector Solder Attachment Surface Mount PCB, With Female Center Contact, 1 Reel Contains 750 pieces PE45262TR750](#)



750 pcs.

MMBX Jack Snap-On Connector Solder Attachment Surface Mount PCB, With Female Center Contact, 1 Reel Contains 750 pieces

RF Connectors Technical Data Sheet

PE45262TR750

Mechanical Specifications

Size

Length 0.24 in [6.1 mm]
Width/Dia. 0.24 in [6.10 mm]
Height 0.21 in [5.33 mm]

Mating Cycles 100 Cycles

Material Specifications

Description	Material	Plating
Contact	Brass	Gold
Insulation	PTFE	
Outer Conductor	Brass	Gold
Body	Brass	Gold

Environmental Specifications

Temperature

Operating Range -55 to +155 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMBX Jack Snap-On Connector Solder Attachment Surface Mount PCB, With Female Center Contact, 1 Reel Contains 750 pieces PE45262TR750](#)



MMBX Jack Snap-On Connector Solder
Attachment Surface Mount PCB, With Female
Center Contact, 1 Reel Contains 750 pieces

RF Connectors Technical Data Sheet

PE45262TR750

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

MMBX Jack Snap-On Connector Solder Attachment Surface Mount PCB, With Female Center Contact, 1 Reel Contains 750 pieces from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMBX Jack Snap-On Connector Solder Attachment Surface Mount PCB, With Female Center Contact, 1 Reel Contains 750 pieces PE45262TR750](#)

URL: <https://www.pasternack.com/mmbx-jack-snap-on-surface-mount-pcb-connector-pe45262tr750-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE45262TR750 CAD Drawing

MMBX Jack Snap-On Connector Solder Attachment Surface Mount PCB, With Female Center Contact, 1 Reel Contains 750 pieces

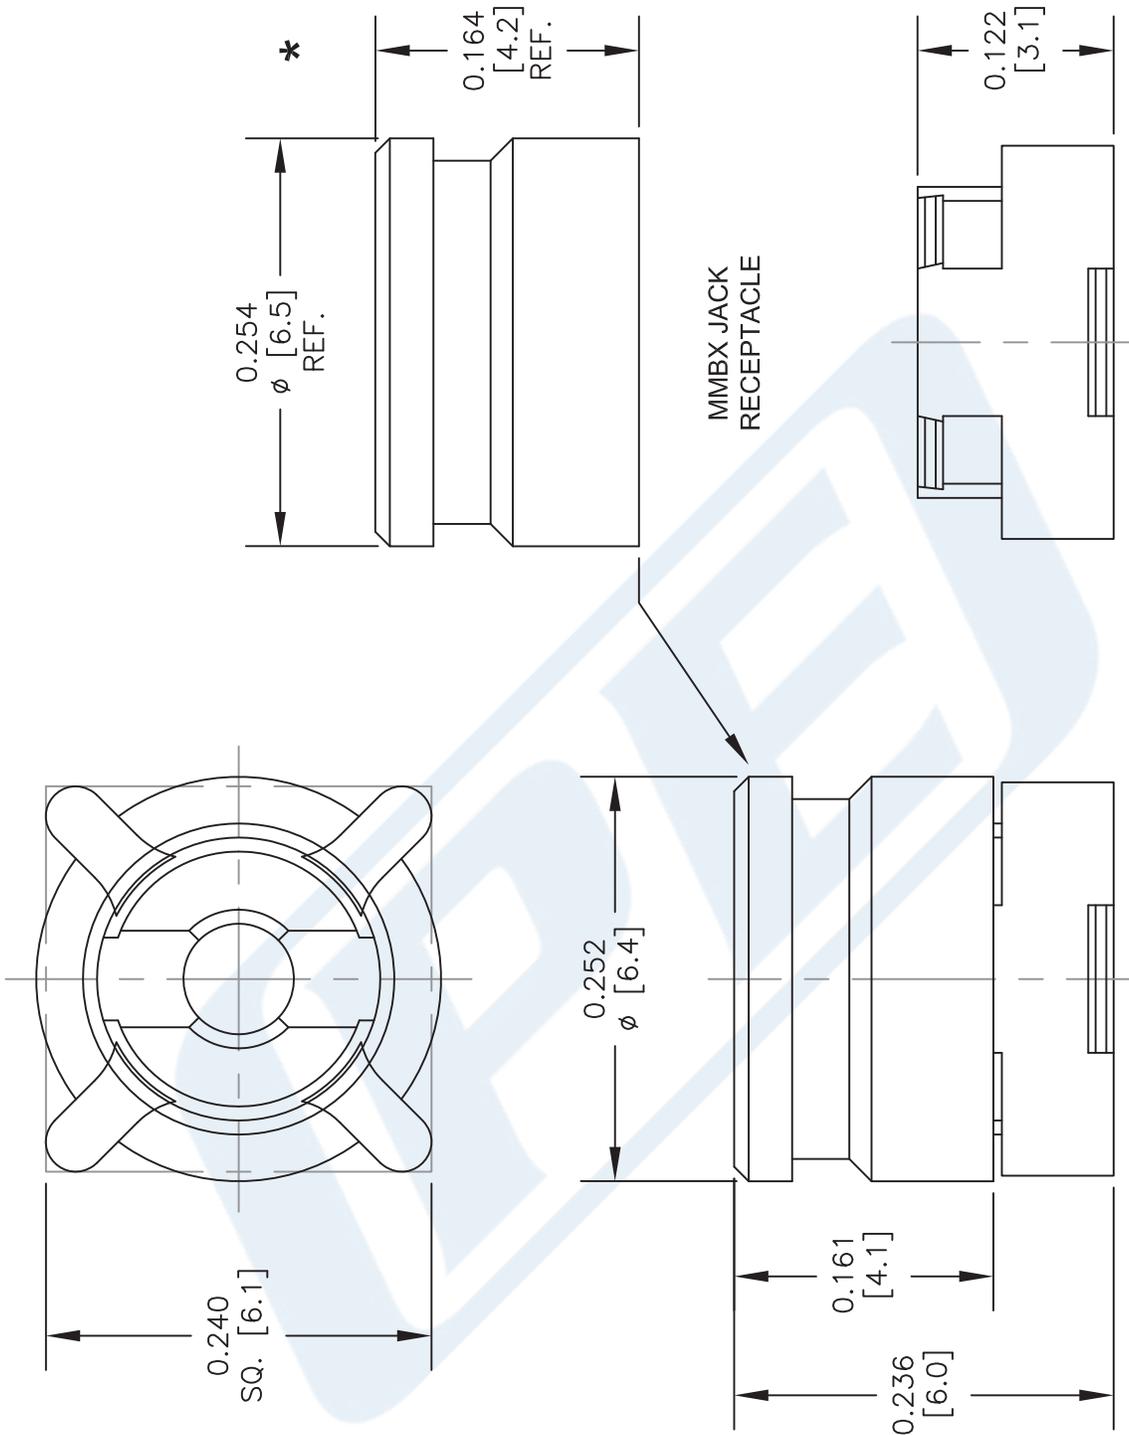

MMBX JACK RECEPTACLE

* CAP FOR MANUFACTURING PROCESS

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE45262TR750

PE PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 092816

SCALE N/A

SIZE A

2233


PE45262TR750 CAD Drawing

MMBX Jack Snap-On Connector Solder Attachment Surface Mount PCB, With Female Center Contact, 1 Reel Contains 750 pieces


PCB

COPLANAR LINE

Pattern and signal are on the same side
The material of PCB is epoxy resin (FR4).
(Er = 4.6)
The solder resist should be printed
Except for the land pattern on the PCB

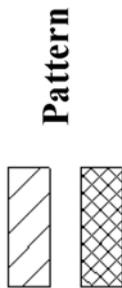

Pattern

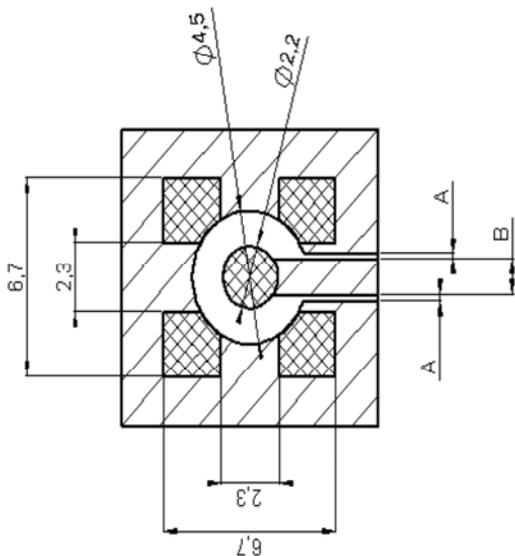


APPLICATION 75Ω
WITH B = 0.55 mm
0.0216 Inches

PCB Thickness [mm] Inches	Coplanar Ligne A [mm] Inches
0.0314 [0.8]	0.0137 [0.350]
0.0393 [1.0]	0.0141 [0.360]
0.0472 [1.2]	0.0143 [0.365]
0.0629 [1.6]	0.0147 [0.375]


STANDARD TOLERANCES

.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

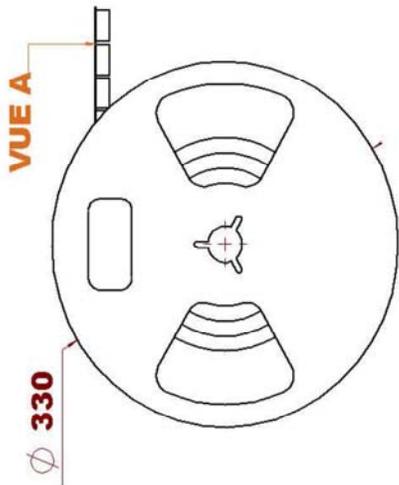

VUE A

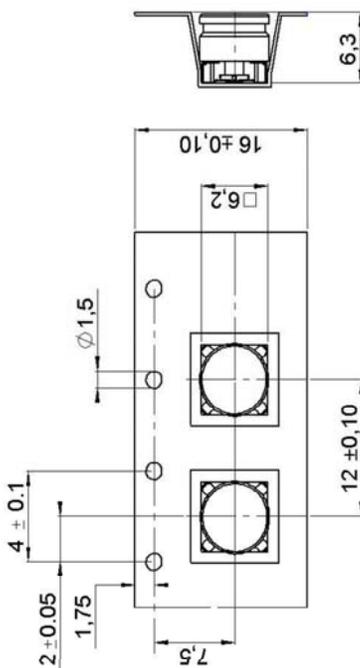

APPLICATION 50Ω
WITH B = 1.2 mm
0.0472 Inches

PCB Thickness [mm] Inches	Coplanar Ligne A [mm] Inches
0.0314 [0.8]	0.0074 [0.190]
0.0393 [1.0]	0.0078 [0.200]
0.0472 [1.2]	0.0080 [0.205]
0.0629 [1.6]	0.0082 [0.210]

DWG TITLE

PE45262TR750

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 092816

SCALE N/A

SIZE A

2233