



RF Connectors Technical Data Sheet

PE45879

Configuration

- BNC Plug Connector
- 50 Ohms
- Straight Body Geometry

Features

- Max. Operating Frequency 4 GHz
- Good VSWR of 1.3:1

- Connector Interface Types: RG58, RG141
- Non-Magnetic Design
- Gold over Copper Plated Bronze Contact
 - Magnetic Susceptibility 10⁻⁵

Applications

General Purpose Test

Custom Cable Assemblies

- Medical
- · Military and Aerospace
- Quantum Computing

Description

Pasternack's PE45879, BNC, Non-Magnetic, Connector is part of our full line of RF components available for same-day shipping. Our BNC plug connector operates up to a maximum frequency of 4 GHz and offers good VSWR of 1.3:1. Pasternack's Non Magnetic connectors are manufactured with materials that are especially adapted to non magnetism. Our non-magnetic connectors have a susceptibility of around 10⁻⁵, as opposed to 10⁻² for standard connectors made of brass/nickel materials. As a result, our non-magnetic connectors are transparent to the magnetic field, which means no field distortion and a higher Signal-to-Noise Ratio (SNR).

Our BNC plug connector PE45879 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.3:1	
Insertion Loss			0.2	dB
Operating Voltage (AC)			500	Vrms
Impedance		50		Ohms
Dielectric Withstanding Voltage (AC)			1,500	Vrms
Insulation Resistance	5,000			MOhms
RF Leakage	60			dB

Mechanical Specifications

Size

Length 0.43 in [10.90 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: BNC Plug Non-Magnetic Connector Crimp/Solder Attachment for RG58, RG141 PE45879

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





RF Connectors Technical Data Sheet

PE45879

 Width
 0.21 in [5.26 mm]

 Height
 0.21 in [5.26 mm]

 Weight
 0.01 lbs [4.88 g]

 Mating Cycles
 500 Cycles

Material Specifications

Description	Material	Plating	
Contact	Bronze	Gold over Copper	
Body	Bronze	Copper-Tin-Zinc Alloy	

Environmental Specifications

Temperature

Operating Range -55 to +120 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: BNC Plug Non-Magnetic Connector Crimp/Solder Attachment for RG58, RG141 PE45879






RF Connectors Technical Data Sheet

PE45879

Assembly Instruction

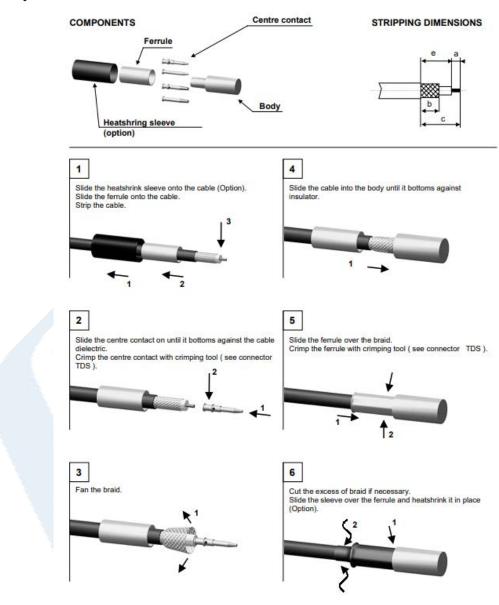

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: BNC Plug Non-Magnetic Connector Crimp/Solder Attachment for RG58, RG141 PE45879

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451





RF Connectors Technical Data Sheet

PE45879

BNC Plug Non-Magnetic Connector Crimp/Solder Attachment for RG58, RG141 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: BNC Plug Non-Magnetic Connector Crimp/Solder Attachment for RG58, RG141 PE45879

URL: https://www.pasternack.com/bnc-plug-rg58-rg141-connector-pe45879-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE45879 CAD Drawing

BNC Plug Non-Magnetic Connector Crimp/Solder Attachment for RG58, RG141

