

6

5

4


3

2

1

REVISION

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	09/07/2023	BPUCHASKI	GUTTADAURO

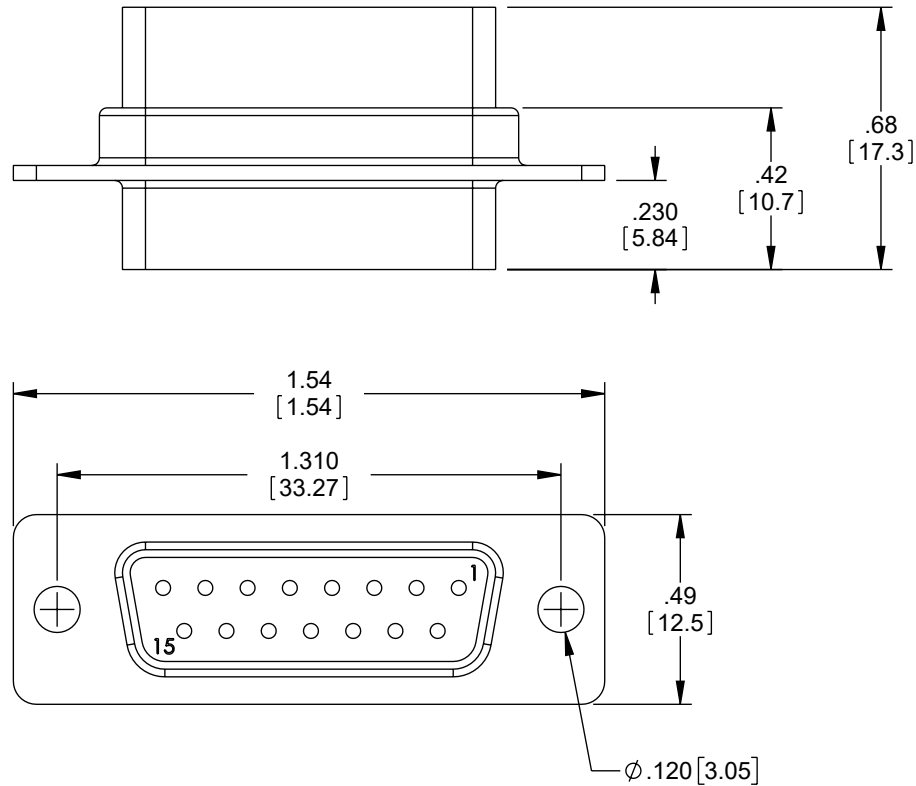

NOTES:

MATERIAL:

SHELL: STEEL

INSULATOR: PBT W/GLASS FIBER FILL (UL 94V-0 RATED)

FINISH:

FRONT SHELL: BRIGHT TIN/NICKEL PLATED

REAR SHELL: BRIGHT TIN PLATED

REGULATORY COMPLIANCE:

EU ROHS DIRECTIVE (MOST RECENT RELATED VERSION)

CATALOG #	PACKAGING
PE45973	1/BAG

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [5] FRACTIONS

.XX = ±.02 [0.5] ± 1/32

.XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:


≤12 [305] = +1 [25] / -0

>12 [305] ≤ 60 [1524] = +2 [51] / -0

>60 [1524] ≤ 120 [3048] = +4 [102] / -0

>120 [3048] ≤ 300 [7620] = +6 [152] / -0

>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARYWebsite: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE

NONE

SHEET

1 OF 1

DESCRIPTION

INSERTION TYPE D-SUB CONNECTOR, DB15 FEMALE

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	BPUCHASKI	PE45973	A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1