


Mini SMP (SMPM) Female VITA 67.3 Connector Solder Attachment for PE-P047, PE-P047HF, PE-P047LL, PE-P047FLX

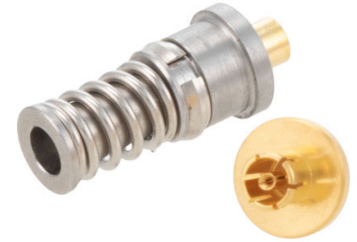

PE49817

Configuration

- Mini SMP Female Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: PE-P047, PE-P047HF, PE-P047LL, PE-P047FLX, FM-SR047ALTN-COIL, FM-SR047CU-COIL, FM-SR047CUTN-COIL
- VITA 67 Design

Features

- Max. Operating Frequency 40 GHz
- Good VSWR of 1.4:1
- Gold Plated Beryllium Copper Contact
- Blind Mate Connector

Applications

- General Purpose Test
- Custom Cable Assemblies
- VITA 67.3 Backplane
- High Density Applications

Description

Pasternack's PE49817 Mini SMP female VITA 67.3 connector with solder attachment for PE-P086, PE-P086HF, PE-P086LL, and PE-P086FLX is part of our full line of RF components available for same-day shipping. Our Mini SMP female VITA 67.3 connector operates up to a maximum frequency of 40 GHz and offers excellent VSWR of 1.4:1. The Pasternack blind mate connector is ideal for applications where direct visual or tactile access to the connection point is not possible, for example, when two circuit boards need to be mated.

Our Mini SMP female VITA 67.3 connector PE49817 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications


Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	
Insertion Loss			0.8	dB
Impedance		50		Ohms

Mechanical Specifications

Size

Length	0.59 in [14.99 mm]
Width	0.2 in [5.08 mm]
Height	0.2 in [5.08 mm]
Weight	0.0018 lbs [0.82 g]

Mini SMP (SMPM) Female VITA 67.3 Connector
Solder Attachment for PE-P047, PE-P047HF,
PE-P047LL, PE-P047FLX

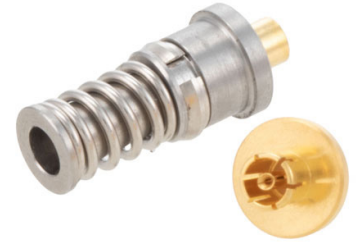

PE49817

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PTFE	
Outer Conductor	Beryllium Copper	Gold
Body	Passivated Stainless Steel	

Mechanical Specification Notes:

500 mating cycles when mated with a Smooth Bore connector (100 when mated to a Full Detent connector).

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Humidity

MIL-STD-202, Method 106, Less Step 7B

Shock

MIL-STD-202, Method 213, Condition I

Vibration

MIL-STD-202, Method 204, Condition D

Thermal Shock

MIL-STD-202, Method 107, Condition B


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- PE49817 works with PE49822 Mini SMP VITA 67.3 10 Port Backplane Module C and PE49824 Mini SMP VITA 67.3 14 Port Backplane Module C


Mini SMP (SMPM) Female VITA 67.3 Connector
Solder Attachment for PE-P047, PE-P047HF,
PE-P047LL, PE-P047FLX

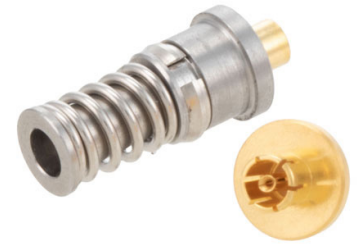

PE49817

Assembly Instruction


Cable Assembly Instructions



Trim insulator and outer conductor to dimensions shown.
Be careful not to nick the center conductor.

NOTE:

To minimize cable dielectric growth during soldering operation,
normalize cable thermal cycle per MIL-DTL-17 prior to final trim.




Insert cable into body, until outer conductor flush with body.
Solder outer conductor to body.

NOTE:

For PE49817, PE49819 and PE49829

Mini SMP (SMPM) Female VITA 67.3 Connector
Solder Attachment for PE-P047, PE-P047HF,
PE-P047LL, PE-P047FLX

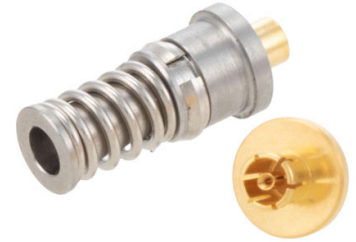

PE49817

Mini SMP (SMPM) Female VITA 67.3 Connector Solder Attachment for PE-P047, PE-P047HF, PE-P047LL, PE-P047FLX from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Mini SMP \(SMPM\) Female VITA 67.3 Connector Solder Attachment for PE-P047, PE-P047HF, PE-P047LL, PE-P047FLX PE49817](https://www.pasternack.com/mini-smp-female-pe-p047-pe-p047hf-pe-p047ll-pe-p047flx-connector-pe49817.html)

URL: <https://www.pasternack.com/mini-smp-female-pe-p047-pe-p047hf-pe-p047flx-connector-pe49817.html>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE49817 CAD Drawing

Mini SMP (SMPM) Female VITA 67.3 Connector Solder Attachment
for PE-P047, PE-P047HF, PE-P047LL, PE-P047FLX

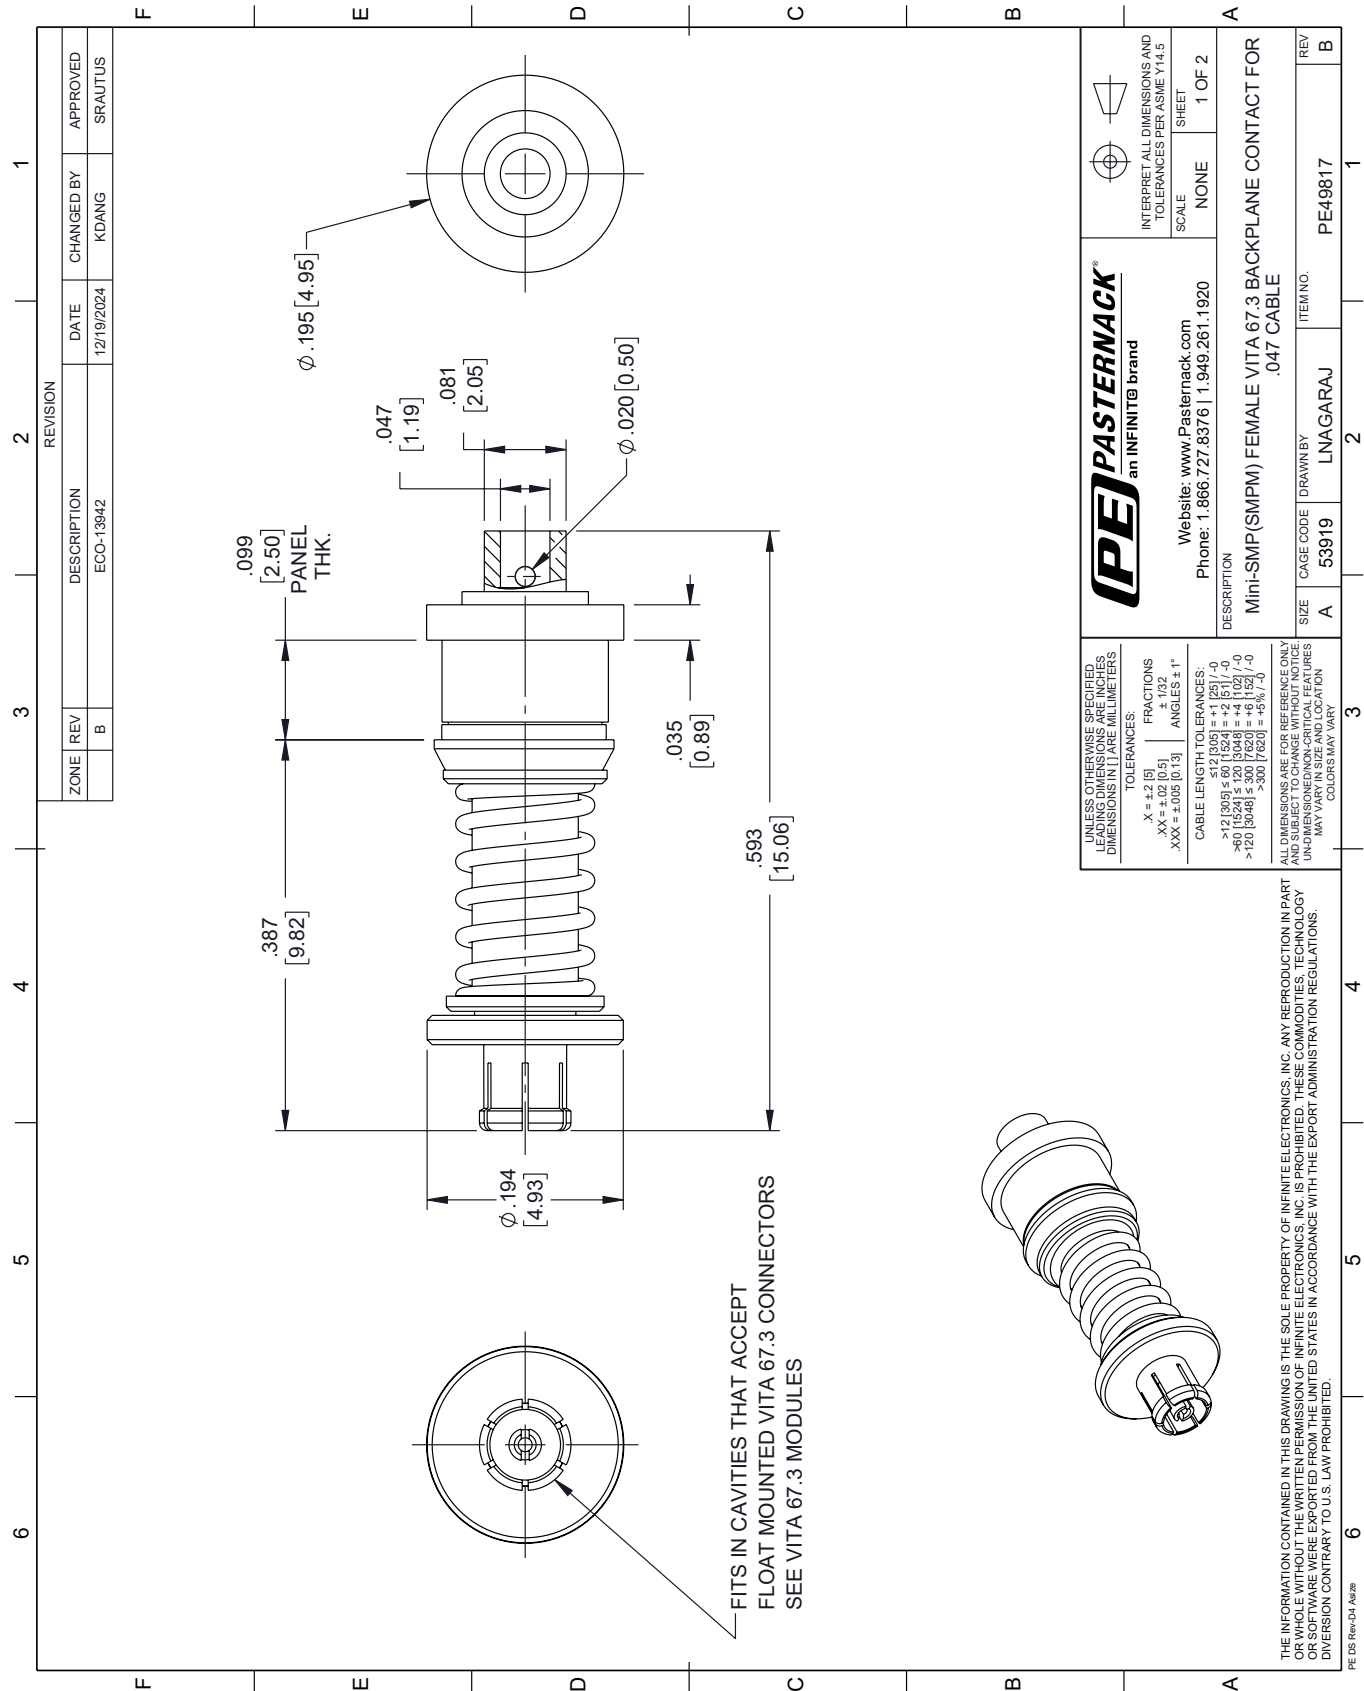

PE49817 CAD Drawing

Mini SMP (SMPM) Female VITA 67.3 Connector Solder Attachment
for PE-P047, PE-P047HF, PE-P047LL, PE-P047FLX

