



Crimp, Cut and Strip Tool for RG59, RG6

Crimp Tools Technical Data Sheet

PE5206

Features

- 3-in-1 Tool
- Compatible with RG59 and RG6 coax
- Ergonomic Handle

Configuration

Tool Type
Cable Type

Crimp, Cut and Strip Tool
RG59, RG6

Mechanical Specifications

Size

Length
Width
Height
Weight

10.39 in [263.91 mm]
4.13 in [105 mm]
0.94 in [23.88 mm]
0.206 lbs [93.44 g]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


- Values at +25 °C, sea level

Crimp, Cut and Strip Tool for RG59, RG6 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Crimp, Cut and Strip Tool for RG59, RG6 PE5206](#)

URL: <https://www.pasternack.com/crimp-cut-and-strip-tool-rg59-rg6-pe5206-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

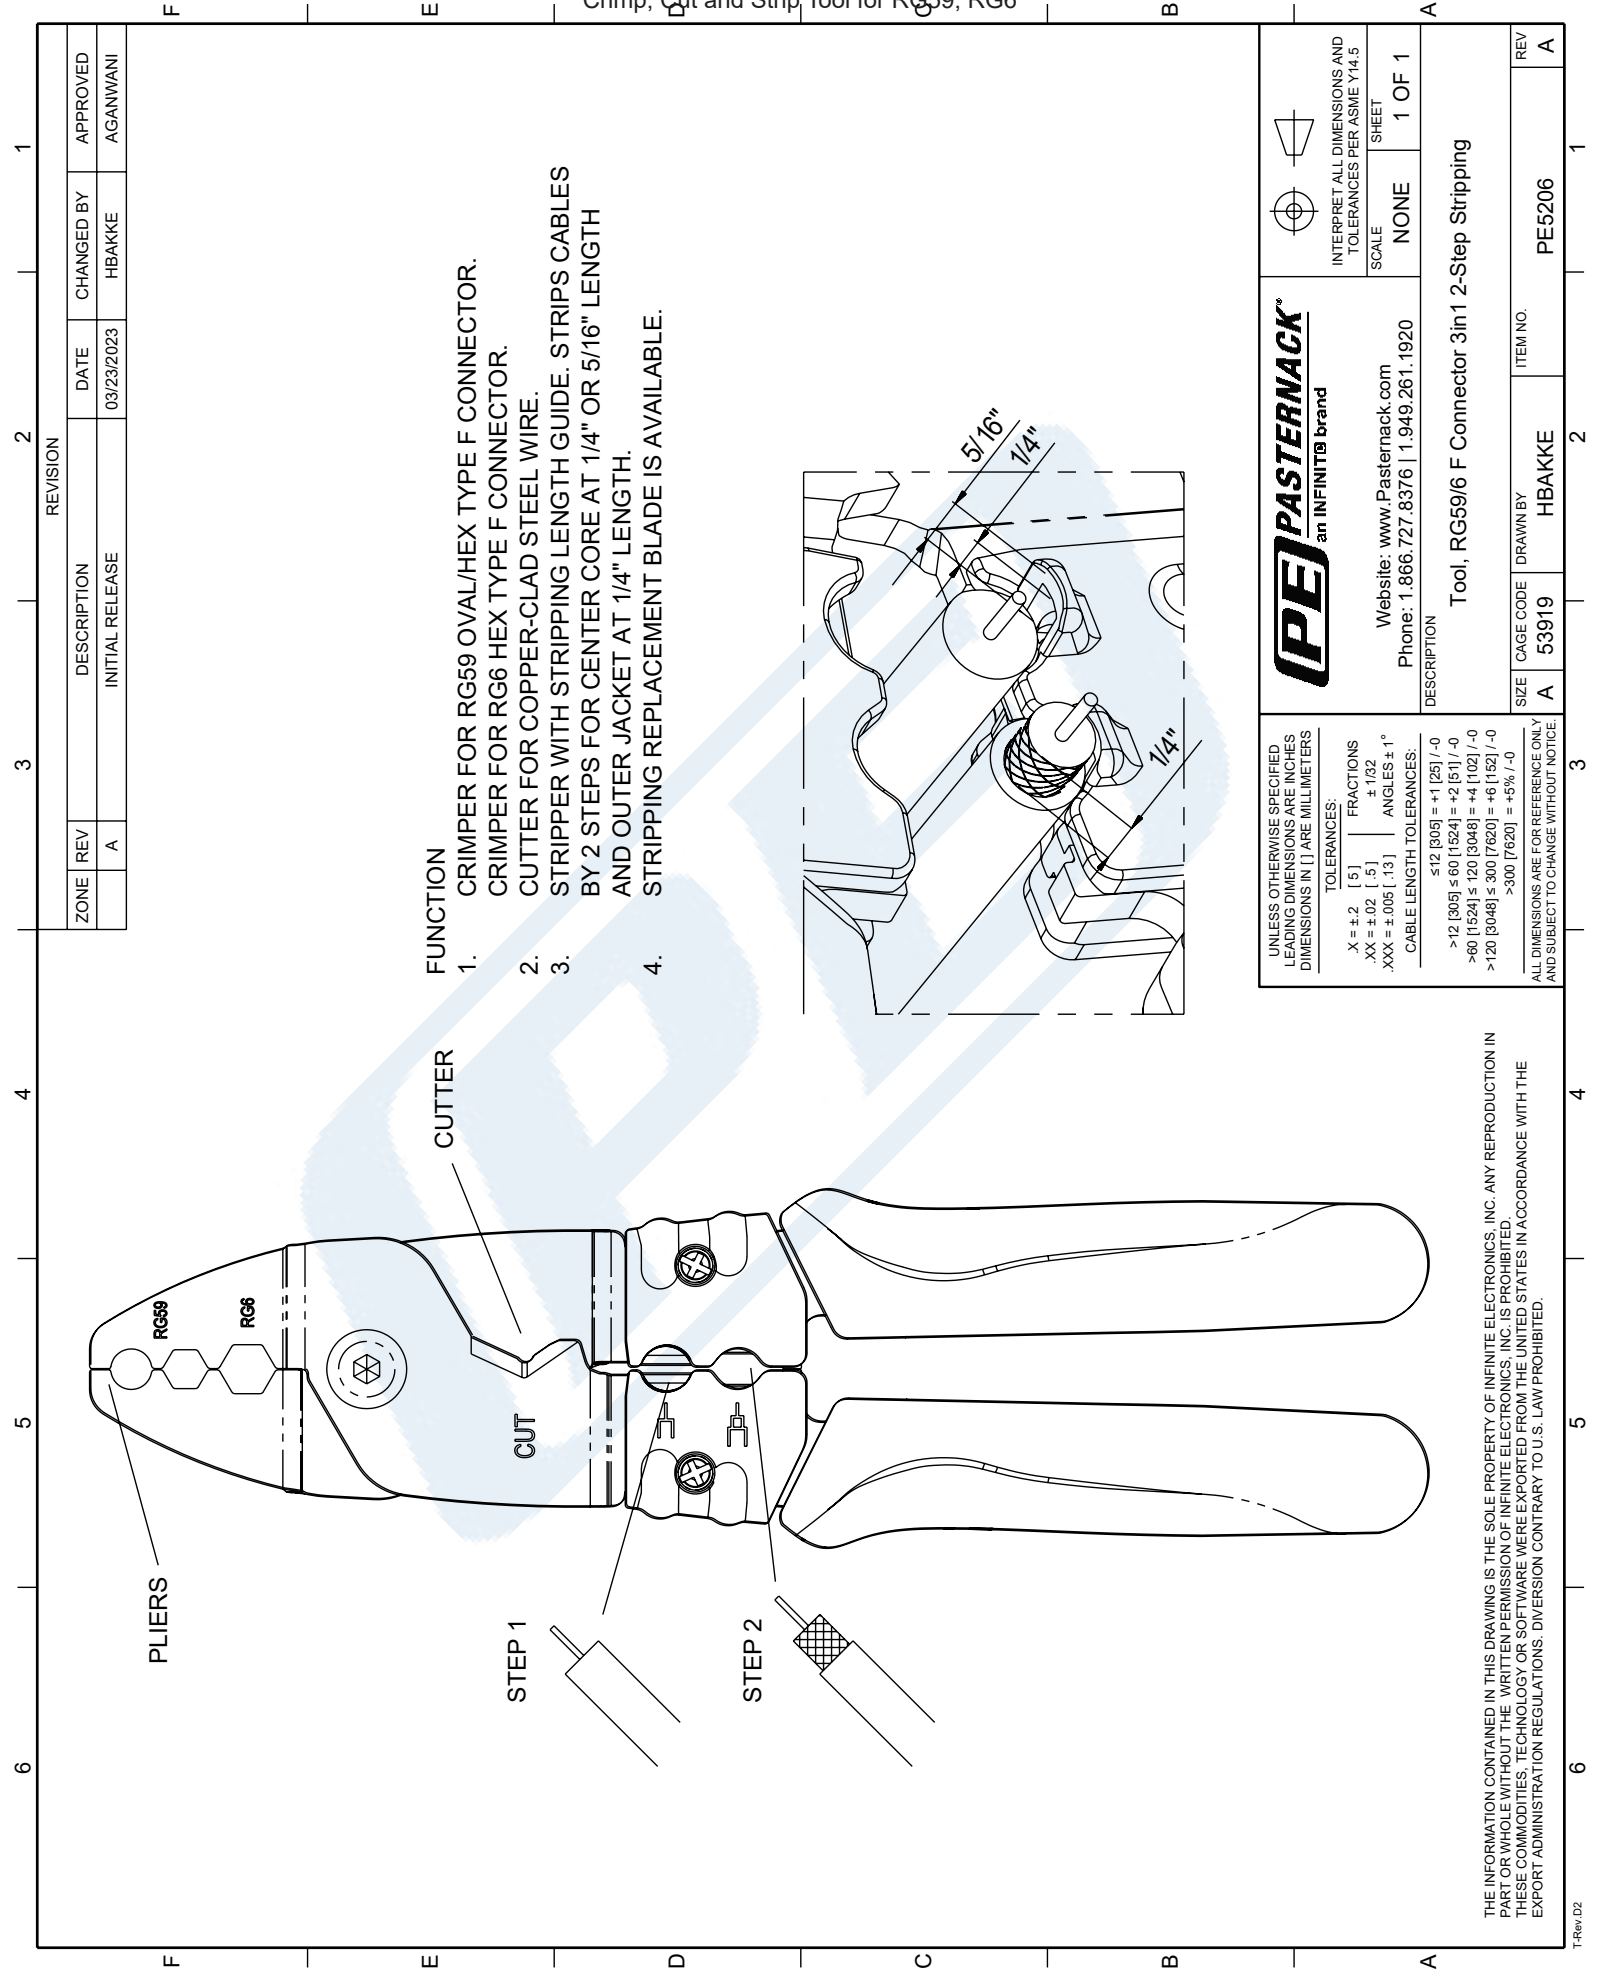

FUNCTION

1. CRIMPER FOR RG59 OVAL/HEX TYPE F CONNECTOR.
CRIMPER FOR RG6 HEX TYPE F CONNECTOR.
2. CUTTER FOR COPPER-CLAD STEEL WIRE.
3. STRIPPER WITH STRIPPING LENGTH GUIDE. STRIPS CABLES BY 2 STEPS FOR CENTER CORE AT 1/4" OR 5/16" LENGTH AND OUTER JACKET AT 1/4" LENGTH.
4. STRIPPING REPLACEMENT BLADE IS AVAILABLE.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ± .2 [.5] FRACTIONS

.XX = ± .02 [.5] ± 1/32

.XXX = ± .005 [.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:

≤ 12 [305] = +1 [25] / -0

> 12 [305] ≤ 60 [1524] = +2 [51] / -0

> 60 [1524] ≤ 120 [3048] = +4 [102] / -0

> 120 [3048] ≤ 300 [7620] = +6 [152] / -0

> 300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE



Website: www.Pasternack.com

Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

Tool, RG59/6 F Connector 3in 1 2-Step Stripping



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE

NONE

SHEET

1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.