



Coax Cable Stripper, 1/4 inch length for DKT SAT 4H cable

Crimp Tools Technical Data Sheet

PE5214

Features

- Compatible with RG59 and RG6 coax (Outer Jacket thickness 0.65mm)
- Stripping length of 1/4" (6mm)
- Strips cable without nicking the braid or scoring the center conductor
- Designed for tight spaces such as around wall box

Configuration

Tool Type
Cable Type

Coax Cable Stripper
RG59, RG6

Mechanical Specifications

Size

Length

8.5 in [215.9 mm]

Width

3.78 in [96 mm]

Height

1.14 in [28.96 mm]

Weight

0.056 lbs [25.4 g]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Coax Cable Stripper, 1/4 inch length for DKT SAT 4H cable from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Coax Cable Stripper, 1/4 inch length for DKT SAT 4H cable PE5214](#)

URL: <https://www.pasternack.com/coax-cable-stripper-rg59-rg6-pe5214-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE5214 CAD Drawing


Coax Cable Stripper, 1/4 inch length for DKT SAT 4H cable

F E D C B A

F E D C B A


6 5 4 3 2 1


REVISION								
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED			
	A	INITIAL RELEASE	03/23/2023	HBAKKE	AGANWANI			

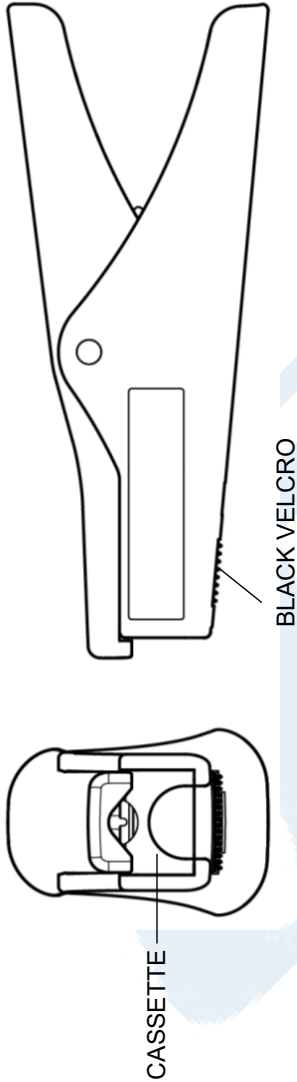

FEATURES:

1. STRIPS COAXIAL CABLE RG59, RG6 OF THE STUB END IN MDU BOX, WALL OUTLET OR OTHER TIGHT SPACES.
2. SPINS AROUND AS A SCREWDRIVER MOTION FOR STRIPPING.
3. USES BLACK VELCRO FOR FOLDING BACK THE BRAIDED SHIELD OF CABLE.
4. DESIGNED WITH INTERCHANGEABLE CASSETTE & STRIPPING LENGTH 6mm (1/4").

CABLE TYPE	STRIPPING LENGTH (D):
CABEL DKT SAT 4H CAVEL DG 80 (OUTER JACKET THICKNESS 0.7mm)	2 BLADES MODE  D= 6mm (1/4") D1=8mm(5/16")

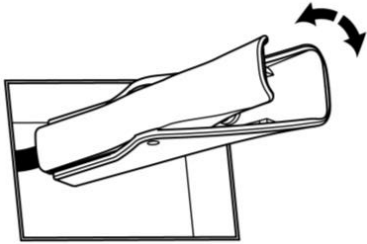

WORKS IN
TIGHT SPOTS.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	
X = ±.2 [.5]	FRACTIONS
.XX = ±.02 [.5]	± 1/32
.XXX = ±.005 [.13]	ANGLES ± 1°
CABLE LENGTH TOLERANCES:	
≤12 [305]	±.125 [-0
>12 [305] ≤ 60 [1524]	±.25 [1 -0
>60 [1524] ≤ 120 [3048]	±.5 [102 -0
>120 [3048] ≤ 300 [7620]	±.75 [152 -0
>300 [7620]	±1.0 [203 -0
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.	

 an INFINIT® brand	
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920	
DESCRIPTION Tool, Mini Ø5 WB cable Front-Loaded Rolling Motion	

	
INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
SCALE	NONE
SHEET	1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.