



Coax Cable Stripper for RG59, RG6, RG7,
RG11 with built-in 7/16 wrench

Crimp Tools Technical Data Sheet

PE5216

Features

- Stripper for 1/4" (6mm) length
- Strips coaxial cables RG59, RG6, RG7, RG11 and 18 and 24 AWG
- Equipped with 7/16" wrench for working with F connectors
- Compact size fits in your pocket and easy storage

Configuration

Tool Type
Cable Type

Coax Cable Stripper
RG59, RG6, RG7, RG11

Mechanical Specifications

Size

Length

8.5 in [215.9 mm]

Width

3.78 in [96 mm]

Height

1.02 in [25.91 mm]

Weight

0.056 lbs [25.4 g]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Coax Cable Stripper for RG59, RG6, RG7, RG11 with built-in 7/16 wrench from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Coax Cable Stripper for RG59, RG6, RG7, RG11 with built-in 7/16 wrench PE5216](#)

URL: <https://www.pasternack.com/coax-cable-stripper-rg59-rg6-rg7-rg11-pe5216-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

F

A

F


E

D

C


B

A

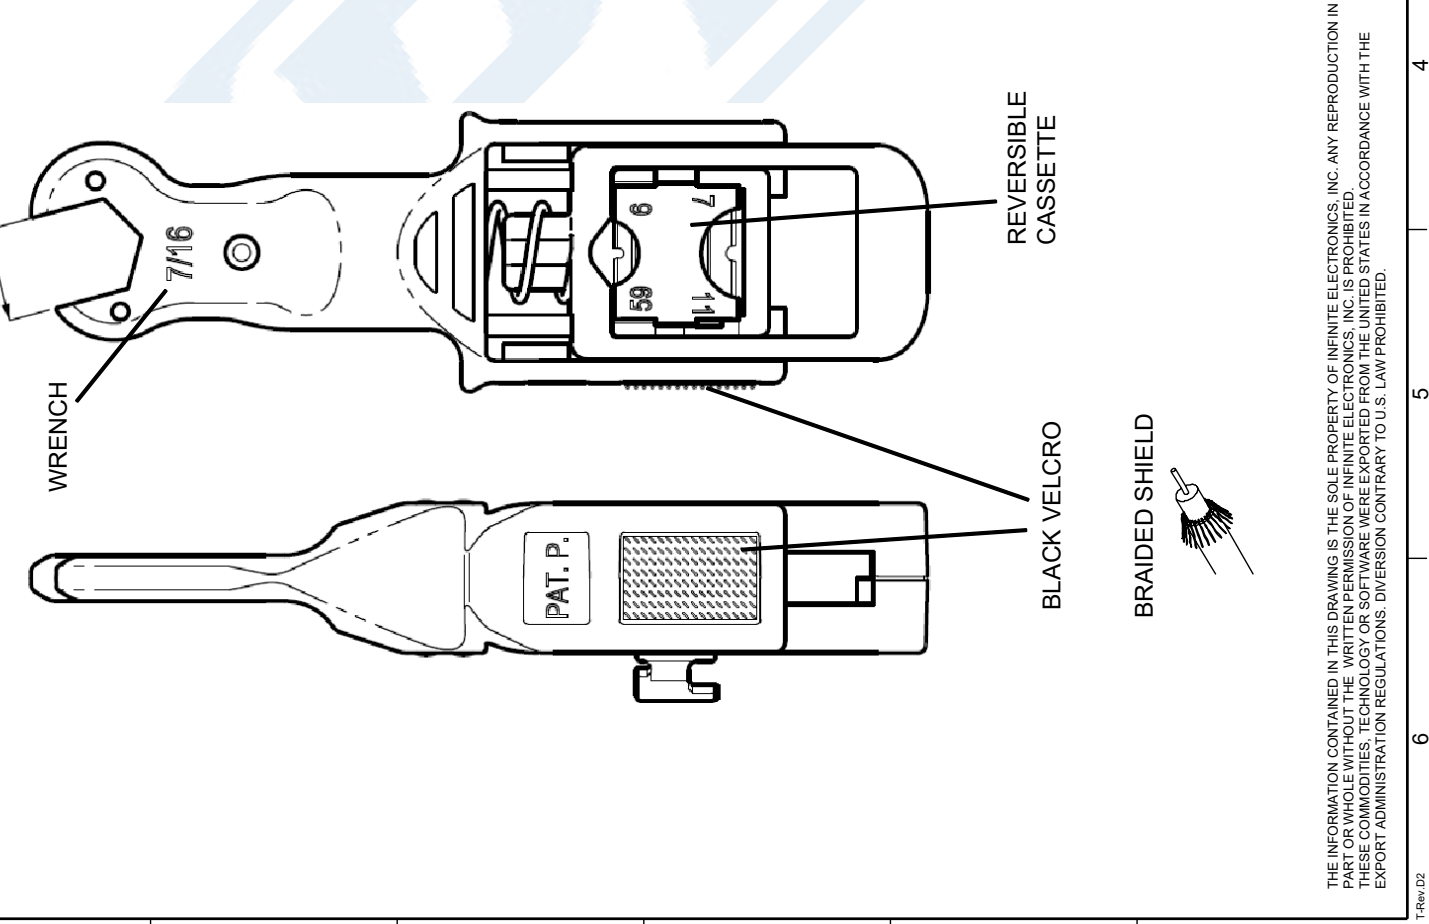

FUNCTIONS:

1. STRIPS COAXIAL CABLES RG59/6/7/11 AND 18 & 24 AWG.
2. USES BLACK VELCRO FOR FOLDING BACK THE BRAIDED SHIELD OF CABLE.
3. DESIGNED WITH INTERCHANGEABLE CASSETTE & STRIPPING LENGTH 6.35mm (0.25").
4. EQUIPPED WITH 7/16" WRENCH FOR USE WITH F CONNECTORS.

CABLE TYPE:	STRIPPING LENGTH (D):
RG59/6/7/11 (W/O CABLE STOP)	2-blade model 

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [.5] FRACTIONS
.XX = ±.02 [.5]
.XXX = ±.005 [.13] ANGLES ± 1°
CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE



Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

Tool, RG59/6/7/11 2-Blade Wrench Design



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5
SCALE NONE
SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.