



## 5 Watt RF Load Up to 18 GHz With N Male Input Black Anodized Aluminum Heatsink

### RF Terminations Technical Data Sheet

PE6097

#### Features

- DC to 18 GHz Frequency Range
- VSWR 1.25:1 Max
- Max Power 5 Watt (CW)
- N Male Coaxial Interface

#### Applications

- Wireless
- Radar Systems
- Commercial and Military Communication
- SatCom
- Test and Measurement

#### Description

Pasternack's PE6097 is an RF termination (also called RF load or dummy load) that operates from DC to 18 GHz and handles up to 5 Watt (CW). Our N termination / load has a male gender. PE6097 N load termination offers 1.25:1 max VSWR. This Pasternack 5W N terminator has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
VSWR			1.25:1	
Input Power (CW)			5	Watts
derated linearly to 1W at +125°C				

#### Mechanical Specifications

##### Size

Length	1.15 in [29.21 mm]
Width	0.8 in [20.32 mm]
Weight	0.075 lbs [34.02 g]

##### Configuration

Connector	N Male
Connector Specification	MIL-STD-348

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt RF Load Up to 18 GHz With N Male Input Black Anodized Aluminum Heatsink PE6097](#)



5 Watt RF Load Up to 18 GHz With N Male Input  
Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6097

**Material Specifications**

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Insulation	Teflon	
Body	Passivated Stainless Steel	
Coupling Nut	Passivated Stainless Steel	
Housing	Black Anodized Aluminum Heatsink	

**Environmental Specifications**

**Temperature**

Operating Range -65 to +125 deg C

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

REACH Compliant 12/17/2015

**Plotted and Other Data**

Notes:

5 Watt RF Load Up to 18 GHz With N Male Input Black Anodized Aluminum Heatsink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt RF Load Up to 18 GHz With N Male Input Black Anodized Aluminum Heatsink PE6097](http://www.pasternack.com/5-watts-n-male-rf-load-up-to-18-ghz-pe6097-p.aspx)

URL: <http://www.pasternack.com/5-watts-n-male-rf-load-up-to-18-ghz-pe6097-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE6097 CAD Drawing

5 Watt RF Load Up to 18 GHz With N Male Input Black Anodized Aluminum Heatsink

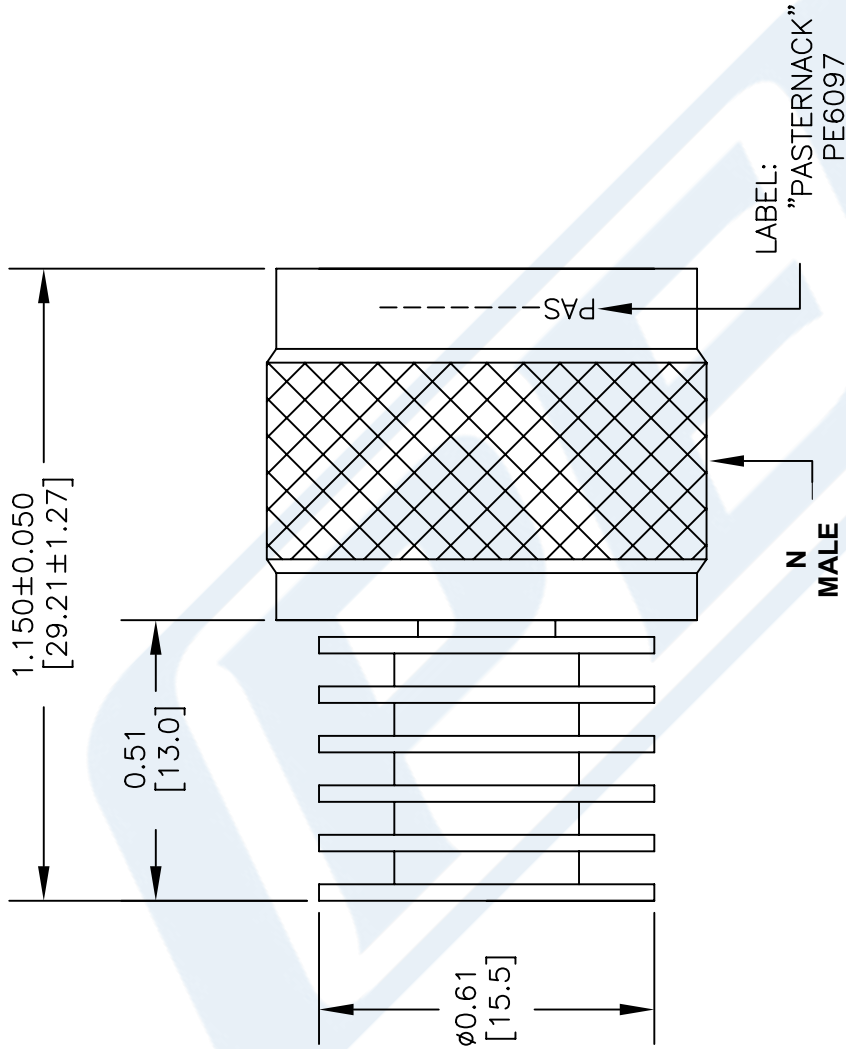

## STANDARD TOLERANCES

DECIMAL  
.XX ±0.01  
.XXX ±0.005

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

**PE6097**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 052616

SCALE N/A

SIZE A

3045