



1 Watt RF Load with Chain Up to 40 GHz with 2.92mm Male Passivated Stainless Steel

RF Terminations Technical Data Sheet

PE6174

Features

- DC to 40 GHz Frequency Range
- VSWR 1.25:1 Max
- Max Power 1 Watt (CW)
- 2.92mm Male Coaxial Interface
- Includes Beaded Chain

Applications

- Wireless
- Radar Systems
- Test and Measurement
- Commercial and Military Communication
- SatCom

Description

Pasternack's PE6174 is an RF termination (also called RF load or dummy load) that operates from DC to 40 GHz and handles up to 1 Watt (CW). Our 2.92mm termination / load has a male gender. PE6174 2.92mm load termination offers 1.25:1 max VSWR.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watts (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
Impedance		50		Ohms
VSWR			1.25:1	
Input Power (CW) derated linearly to 0.1W at +125°C			1	Watts

Mechanical Specifications

Size	
Length	0.59 in [14.99 mm]
Width	0.315 in [8 mm]
Weight	0.013 lbs [5.9 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load with Chain Up to 40 GHz with 2.92mm Male Passivated Stainless Steel PE6174](#)



1 Watt RF Load with Chain Up to 40 GHz with
2.92mm Male Passivated Stainless Steel

RF Terminations Technical Data Sheet

PE6174

Configuration

Connector	2.92mm Male
Connector Specification	MIL-STD-348
Hex Size	5/16 inch
Mating Torque	8 in-lbs [0.90 Nm]
Durability	500 Cycles

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold MIL-PRF-39012
Body	Passivated Stainless Steel	
Coupling Nut	Passivated Stainless Steel	
Housing	Passivated Stainless Steel	

Mechanical Specification Notes:

Dielectric material: high temperature plastic bead.

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant
REACH Compliant 12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load with Chain Up to 40 GHz with 2.92mm Male Passivated Stainless Steel PE6174](#)



1 Watt RF Load with Chain Up to 40 GHz with 2.92mm Male Passivated Stainless Steel

RF Terminations Technical Data Sheet

PE6174

Typical Performance Data



1 Watt RF Load with Chain Up to 40 GHz with 2.92mm Male Passivated Stainless Steel from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load with Chain Up to 40 GHz with 2.92mm Male Passivated Stainless Steel PE6174](https://www.pasternack.com/1-watts-2.92mm-male-rf-load-up-to-40-ghz-precision-pe6174-p.aspx)

URL: <https://www.pasternack.com/1-watts-2.92mm-male-rf-load-up-to-40-ghz-precision-pe6174-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6174 CAD Drawing

1 Watt RF Load with Chain Up to 40 GHz with 2.92mm Male Passivated Stainless Steel

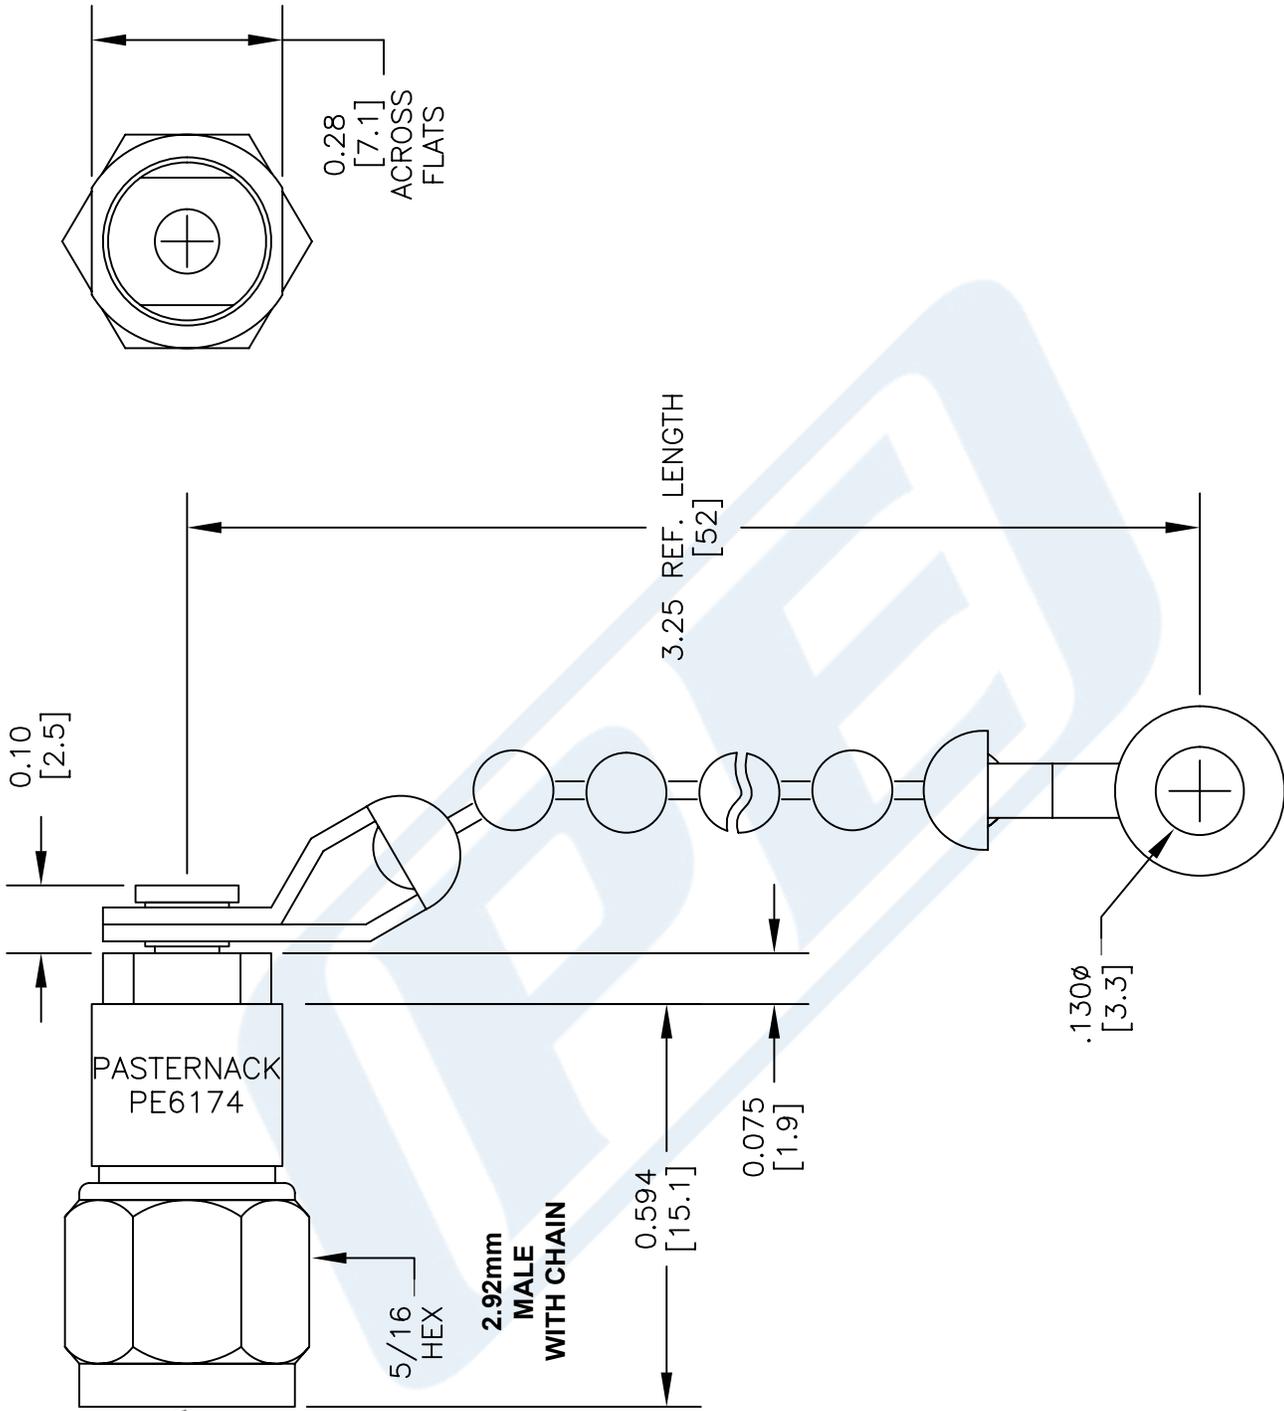

INTERFACE JAW
MIL-STD-348 FOR
2.92mm MATES
WITH ALL SMA
CONNECTORS

STANDARD TOLERANCES

- .X ±0.05
- .XX ±0.03
- .XXX ±0.020

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

DWG TITLE

PE6174

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 052616

SCALE N/A

SIZE A

3045