



2 Watt 75ohm BNC jack termination with chain 2GHz VSWR 1.2

## RF Terminations Technical Data Sheet

**PE6255C**

### Features

- DC to 2 GHz Frequency Range
- 75 Ohm Impedance
- VSWR 1.2:1 Max
- Max Power 2 Watts (CW)
- BNC Female Coaxial Interface
- Includes Beaded Chain

### Applications

- Wireless
- Video Signal Transmission
- Radar Systems
- Test and Measurement
- Commercial and Military Communication
- Avionics

### Description

Pasternack's PE6255C is an RF termination (also called RF load or dummy load) that operates from DC to 2 GHz and handles up to 2 Watt (CW). Our BNC termination / load has a female gender.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
Impedance		75		Ohms
VSWR			1.2:1	
Input Power (CW)			2	Watts

### Mechanical Specifications

#### Size

Length	1.28 in [32.51 mm]
Width	0.433 in [11 mm]
Height	0.433 in [11 mm]
Weight	0.033 lbs [14.97 g]

#### Configuration

Connector	BNC Female
Connector Specification	MIL-STD-348

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Watt 75ohm BNC jack termination with chain 2GHz VSWR 1.2 PE6255C](#)



## 2 Watt 75ohm BNC jack termination with chain 2GHz VSWR 1.2

### RF Terminations Technical Data Sheet

**PE6255C**

#### Material Specifications

Description	Material	Plating
Insulation	Teflon	
Body	Brass	Tri-Metal
Housing	Brass	Tri-Metal
Chain	Brass	Nickel

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

2 Watt 75ohm BNC jack termination with chain 2GHz VSWR 1.2 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Watt 75ohm BNC jack termination with chain 2GHz VSWR 1.2 PE6255C](#)


URL: <https://www.pasternack.com/rf-load-2-watts-2-ghz-bnc-female-pe6255c-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE6255C CAD Drawing

2 Watt 75ohm BNC jack termination with chain 2GHz VSWR 1.2

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/10/2022	SPONG

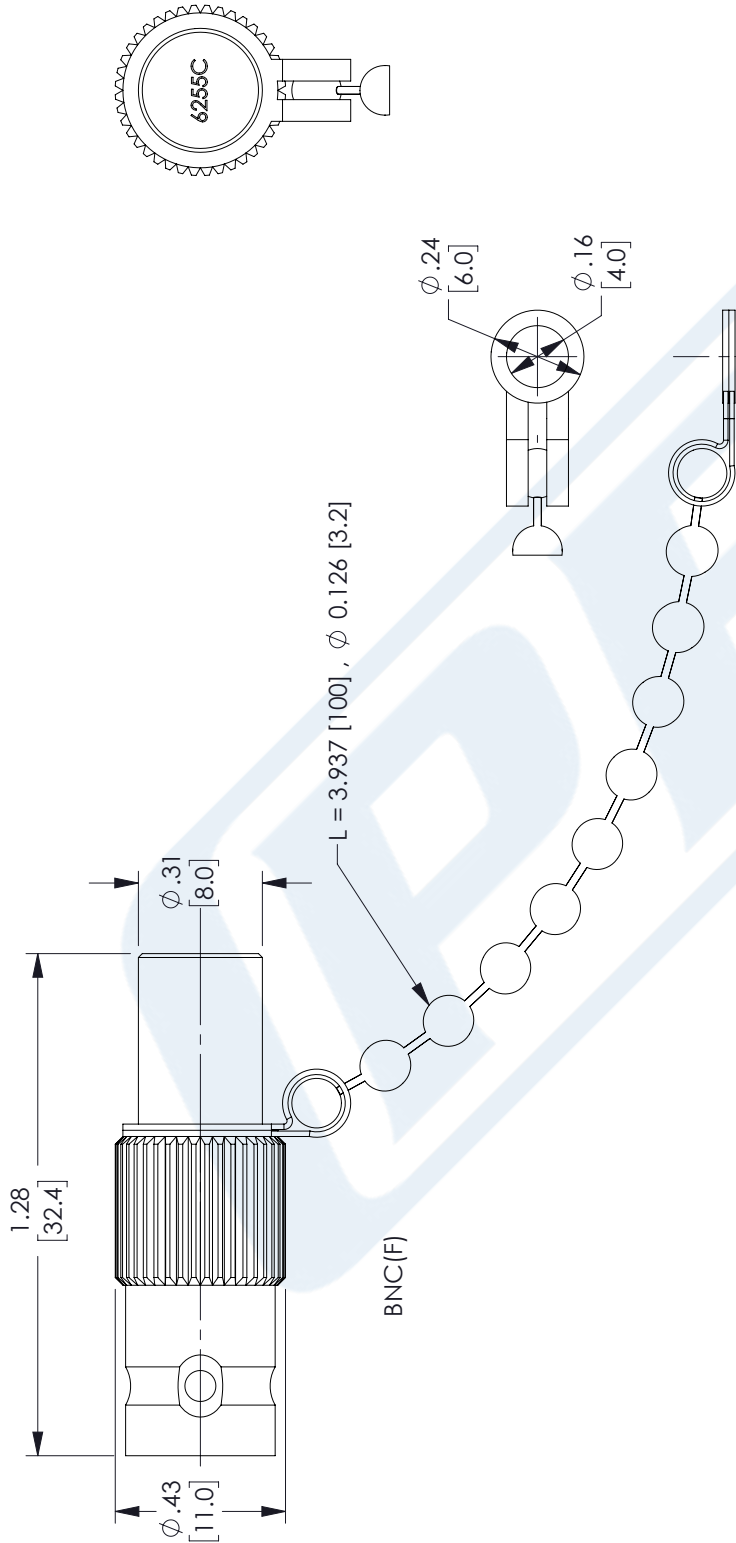

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

.X = ± .2	[.08]	FRACTIONS
.XX = ± .02	[.51]	± 1/32
.XXX = ± .005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	± .1 [25] / -0
12 [305] < L ≤ 60 [1524]	± .2 [51] / -0
60 [1524] < L ≤ 120 [3048]	± .4 [102] / -0
120 [3048] < L ≤ 300 [7620]	± .6 [152] / -0
300 [7620] < L	± .5% L / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK**  
an INFINITE brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: [www.pasternack.com](http://www.pasternack.com)  
E-mail: [sales@pasternack.com](mailto:sales@pasternack.com)

THIRD-ANGLE PROJECTION

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

SIZE A	CAGE CODE 53919	DRAWN BY PSRINIVAS	ITEM NO. PE6255C	REV A
--------	-----------------	--------------------	------------------	-------

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.