



Diplexer 75 Ohm Type F Female, 5 to 42 MHz
Low Pass, 54 to 1250 MHz High Pass

RF Diplexers Technical Data Sheet

PE8DP1006

Features

- Frequency range from 5 to 1250 MHz
- High pass band: 54 to 1250 MHz
- Low pass band: 5 to 42 MHz
- Max insertion loss 2.5 dB
- 75ohm impedance
- Max VSWR 1.58:1

Applications

- Cable TV/Internet
- Signal Splitting
- Broadcast TV
- MSO

Description

PE8DP1006 is a RF diplexer with F-type connectors used to split RF signals with different frequencies. The operating frequency range for this diplexer is from 5 to 1250 MHz. The high pass band is from 54 to 1250 MHz and low pass band is from 5 to 42 MHz. This RF diplexer has great insertion loss of 0.5 dB and minimum return loss of 13 dB with 75ohm impedance. PE8DP1006 is part of a broad RF product portfolio from Pasternack which can be shipped the same day with no MOQ.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Impedance		75		Ohms
Common Port				
Frequency	5		1,250	MHz
LPF Port				
Passband Frequency	5		42	MHz
Return Loss	14	20		dB
Insertion Loss		0.5	2.2	dB
Rejection Frequency	54		1,250	MHz
Rejection	46	60		dB
HPF Port				
Passband Frequency	54		1,250	MHz
Return Loss	12	16		dB
Insertion Loss		0.5	2.2	dB
Rejection Frequency	5		42	MHz
Rejection	46	55		dB

Electrical Specification Notes:
Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Diplexer 75 Ohm Type F Female, 5 to 42 MHz Low Pass, 54 to 1250 MHz High Pass PE8DP1006](#)



Diplexer 75 Ohm Type F Female, 5 to 42 MHz
Low Pass, 54 to 1250 MHz High Pass

RF Diplexers Technical Data Sheet

PE8DP1006

Mechanical Specifications

Size

Length	2.933 in [74.5 mm]
Width	1.299 in [32.99 mm]
Height	0.705 in [17.91 mm]
Weight	0.132 lbs [59.87 g]
Body Material	Zinc
Body Plating	Zinc
Finish	Polished

Configuration

Design	Bidirectional
Package Style	Connectorized
Connector 1	F Female
Connector 2	F Female
Connector 3	F Female

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Diplexer 75 Ohm Type F Female, 5 to 42 MHz Low Pass, 54 to 1250 MHz High Pass from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Diplexer 75 Ohm Type F Female, 5 to 42 MHz Low Pass, 54 to 1250 MHz High Pass PE8DP1006](#)


URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE8DP1006 CAD Drawing

Diplexer 75 Ohm Type F Female, 5 to 42 MHz Low Pass, 54 to 1250 MHz High Pass

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/03/22	SPONG

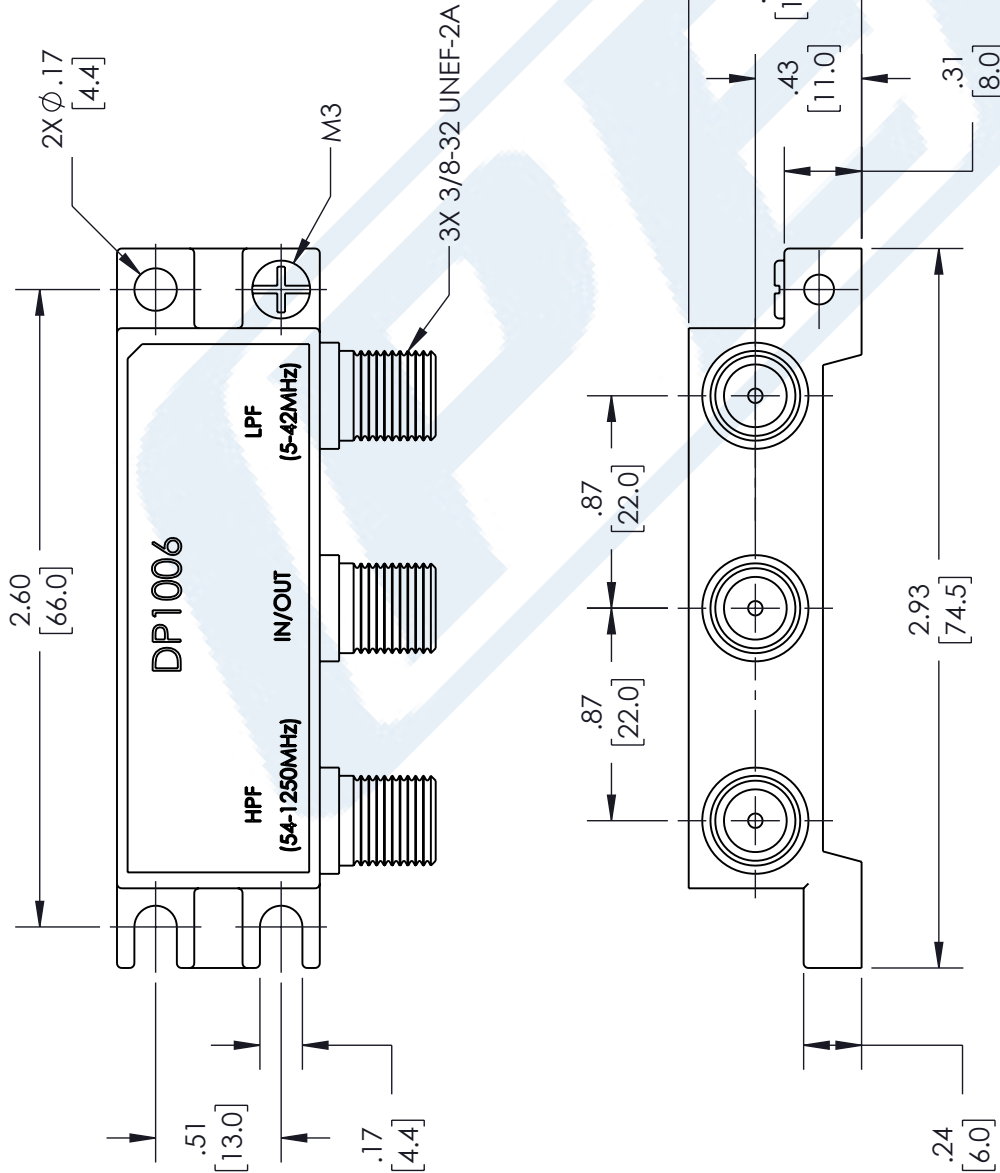

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: .X = ±.2 [5.08] FRACTIONS .XX = ±.02 [.51] ± 1/32 .XXX = ±.005 [.13] ANGLES ± 1° CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5% / -0 ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		THIRD-ANGLE PROJECTION THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A	
PE PASTERNAK an INFINITI® brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com		ITEM NO. PE8DP1006	
SIZE A		DRAWN BY VTHANGARAJ	
CAGE CODE 53919		REV A	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.