



Low PIM 7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter

RF Adapters Technical Data Sheet

PE91088

Configuration

- 7/16 DIN Male Connector 1
- 4.1/9.5 Mini DIN Male Connector 2
- 50 Ohms
- Low PIM Design
- Straight Body Geometry

Features

- Max VSWR of 1.25:1 up to 6 GHz
- PIM levels lower than -160 dBc
- Silver Plated Beryllium Copper Contact

Applications

- Allows Connection Between Series
- General Purpose Test

Description

Pasternack's PE91088 Low PIM 7/16 DIN male to 4.1/9.5 Mini DIN male adapter is part of our full line of RF components available for same-day shipping. Our 7/16 DIN to 4.1/9.5 Mini DIN adapter has a male to male gender configuration in a Low PIM design. PE91088 7/16 DIN male to 4.1/9.5 Mini DIN male adapter operates to 6 GHz. The Pasternack RF adapter provides excellent VSWR of 1.25:1 maximum and passive intermodulation of -160 dBc maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.25:1	
Passive Intermodulation using 2x20W tones			-160	dBc

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 3	3 to 4	4 to 6			GHz
VSWR, Max	1.1:1	1.15:1	1.25:1			

Electrical Specification Notes:
Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter PE91088](#)



Low PIM 7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter

RF Adapters Technical Data Sheet

PE91088

Mechanical Specifications

Size

Length	1.97 in [50.04 mm]
Width	1.26 in [32 mm]
Weight	0.258 lbs [117.03 g]

Description	Connector 1	Connector 2
Type	7/16 DIN Male	4.1/9.5 Mini DIN Male
Polarity	Standard	Standard
Hex Size	32 mm	22 mm

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	7/16 DIN Male		4.1/9.5 Mini DIN Male	
Contact	Beryllium Copper	Silver	Beryllium Copper	Silver
Insulation	PTFE		PTFE	
Body	Brass	Tri-Metal	Brass	Tri-Metal
Coupling Nut	Brass	Tri-Metal	Brass	Tri-Metal

Environmental Specifications

Temperature

Operating Range	-40 to +120 deg C
-----------------	-------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter PE91088](#)



Low PIM 7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter

RF Adapters Technical Data Sheet

PE91088

Low PIM 7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter PE91088](https://www.pasternack.com/7-16-male-4.1-9.5-mini-din-male-straight-adapter-pe91088-p.aspx)

URL: <https://www.pasternack.com/7-16-male-4.1-9.5-mini-din-male-straight-adapter-pe91088-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE91088 CAD Drawing

Low PIM 7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter

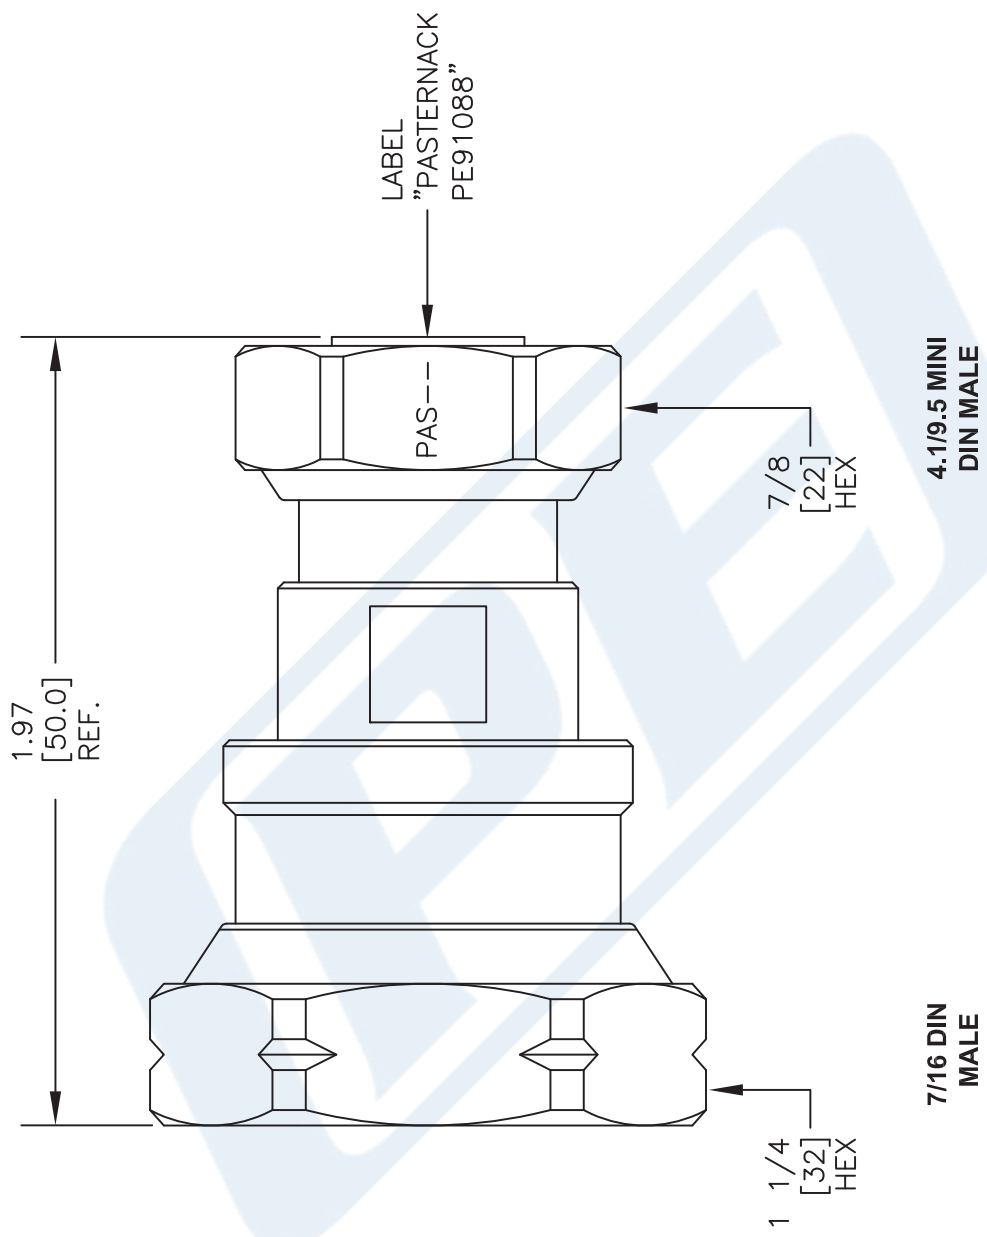

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

DWG TITLE PE91088		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].		
FSCM NO. 53919		CAD FILE 082516	SCALE N/A	SIZE A
PE PASTERNAK® THE ENGINEER'S RF SOURCE Pasternack Enterprises, Inc. P.O. Box 16759 Irvine CA 92623 Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com		41742		