



High Temperature Adapter 4 Hole Flange Mount 3.5mm Female to 3.5mm Female, 34.5GHz VSWR1.25, MIL-STD 348B

RF Adapters Technical Data Sheet

PE91687

Configuration

- 3.5mm Female Connector 1
- 3.5mm Female Connector 2
- 50 Ohm
- High Temperature Adapter Design
- Straight Body Geometry
- 4 Hole Flange Mount Method

Features

- Max VSWR of 1.25:1 up to 34.5 GHz
- Gold over Nickel Plated Beryllium Copper Contact

Applications

- General Purpose Test
- Rack Mounted Equipment

Description

Pasternack's PE91687 4 hole flange 3.5mm female to 3.5mm female adapter is part of our full line of RF components available for same-day shipping. The 3.5mm connector mates mechanically with commercially available SMA and 2.92mm (K) connectors. Our 3.5mm to 3.5mm adapter has a female to female gender configuration built of stainless steel in a high temperature adapter design. PE91687 3.5mm female to 3.5mm female adapter operates to 34.5 GHz. The Pasternack RF adapter provides excellent VSWR of 1.25:1 maximum. This RF 3.5mm 4 hole flange to 3.5mm adapter allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		34.5	GHz
VSWR			1.25:1	
Insertion Loss			0.3	dB
Operating Voltage (AC)			335	Vrms
Dielectric Withstanding Voltage (AC)			1,000	Vrms
Insulation Resistance	5,000			MOhms
RF Leakage			100	dB

Mechanical Specifications

Size
Length 0.98 in [24.89 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Temperature Adapter 4 Hole Flange Mount 3.5mm Female to 3.5mm Female, 34.5GHz VSWR1.25, MIL-STD 348B PE91687](#)



High Temperature Adapter 4 Hole Flange Mount 3.5mm Female to 3.5mm Female, 34.5GHz VSWR1.25, MIL-STD 348B

RF Adapters Technical Data Sheet

PE91687

Width	0.50 in [12.70 mm]
Height	0.50 in [12.70 mm]
Weight	0.01 lbs [4.54 g]

Description	Connector 1	Connector 2
Type	3.5mm Female	3.5mm Female
Polarity	Standard	Standard
Mating Cycles, Min	500	500
Mating Torque	7.1 to 9.7 in-lbs [0.80 to 1.10 Nm]	7.1 to 9.7 in-lbs 0.80 to 1.10 Nm
Contact Captivation Axial Force, Min	6.1 lbs [2.77 kg]	6.1 lbs [2.77 kg]
Coupling Proof Torque	15 in-lbs [1.7 Nm]	15 in-lbs [1.7 Nm]

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	3.5mm Female		3.5mm Female	
Contact	Beryllium Copper	Gold over Nickel	Beryllium Copper	Gold over Nickel
Insulation	PEI		PEI	
Body	Stainless Steel	Passivated	Stainless Steel	Passivated

Environmental Specifications

Temperature

Operating Range -50 to +170 °C

Humidity

MIL-STD-202, Method 206

Thermal Shock

MIL-STD-202, Method 107, Condition B

Salt Spray

MIL-STD-202, Method 101, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Temperature Adapter 4 Hole Flange Mount 3.5mm Female to 3.5mm Female, 34.5GHz VSWR1.25, MIL-STD 348B PE91687](#)



High Temperature Adapter 4 Hole Flange Mount 3.5mm Female to 3.5mm Female, 34.5GHz VSWR1.25, MIL-STD 348B

RF Adapters Technical Data Sheet

PE91687

High Temperature Adapter 4 Hole Flange Mount 3.5mm Female to 3.5mm Female, 34.5GHz VSWR1.25, MIL-STD 348B from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Temperature Adapter 4 Hole Flange Mount 3.5mm Female to 3.5mm Female, 34.5GHz VSWR1.25, MIL-STD 348B PE91687](https://www.pasternack.com/high-temperature-adapter-4-hole-flange-mount-3.5mm-female-to-3.5mm-female-adapter-34.5ghz-vswr1.25-mil-std-348b-pe91687)

URL: <https://www.pasternack.com/high-temperature-adapter-4-hole-flange-mount-3.5mm-female-to-3.5mm-female-adapter-34.5ghz-vswr1.25-mil-std-348b-pe91687-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE91687 CAD Drawing

High Temperature Adapter 4 Hole Flange Mount 3.5mm Female
to 3.5mm Female, 34.5GHz VSWR1.25, MIL-STD 348B

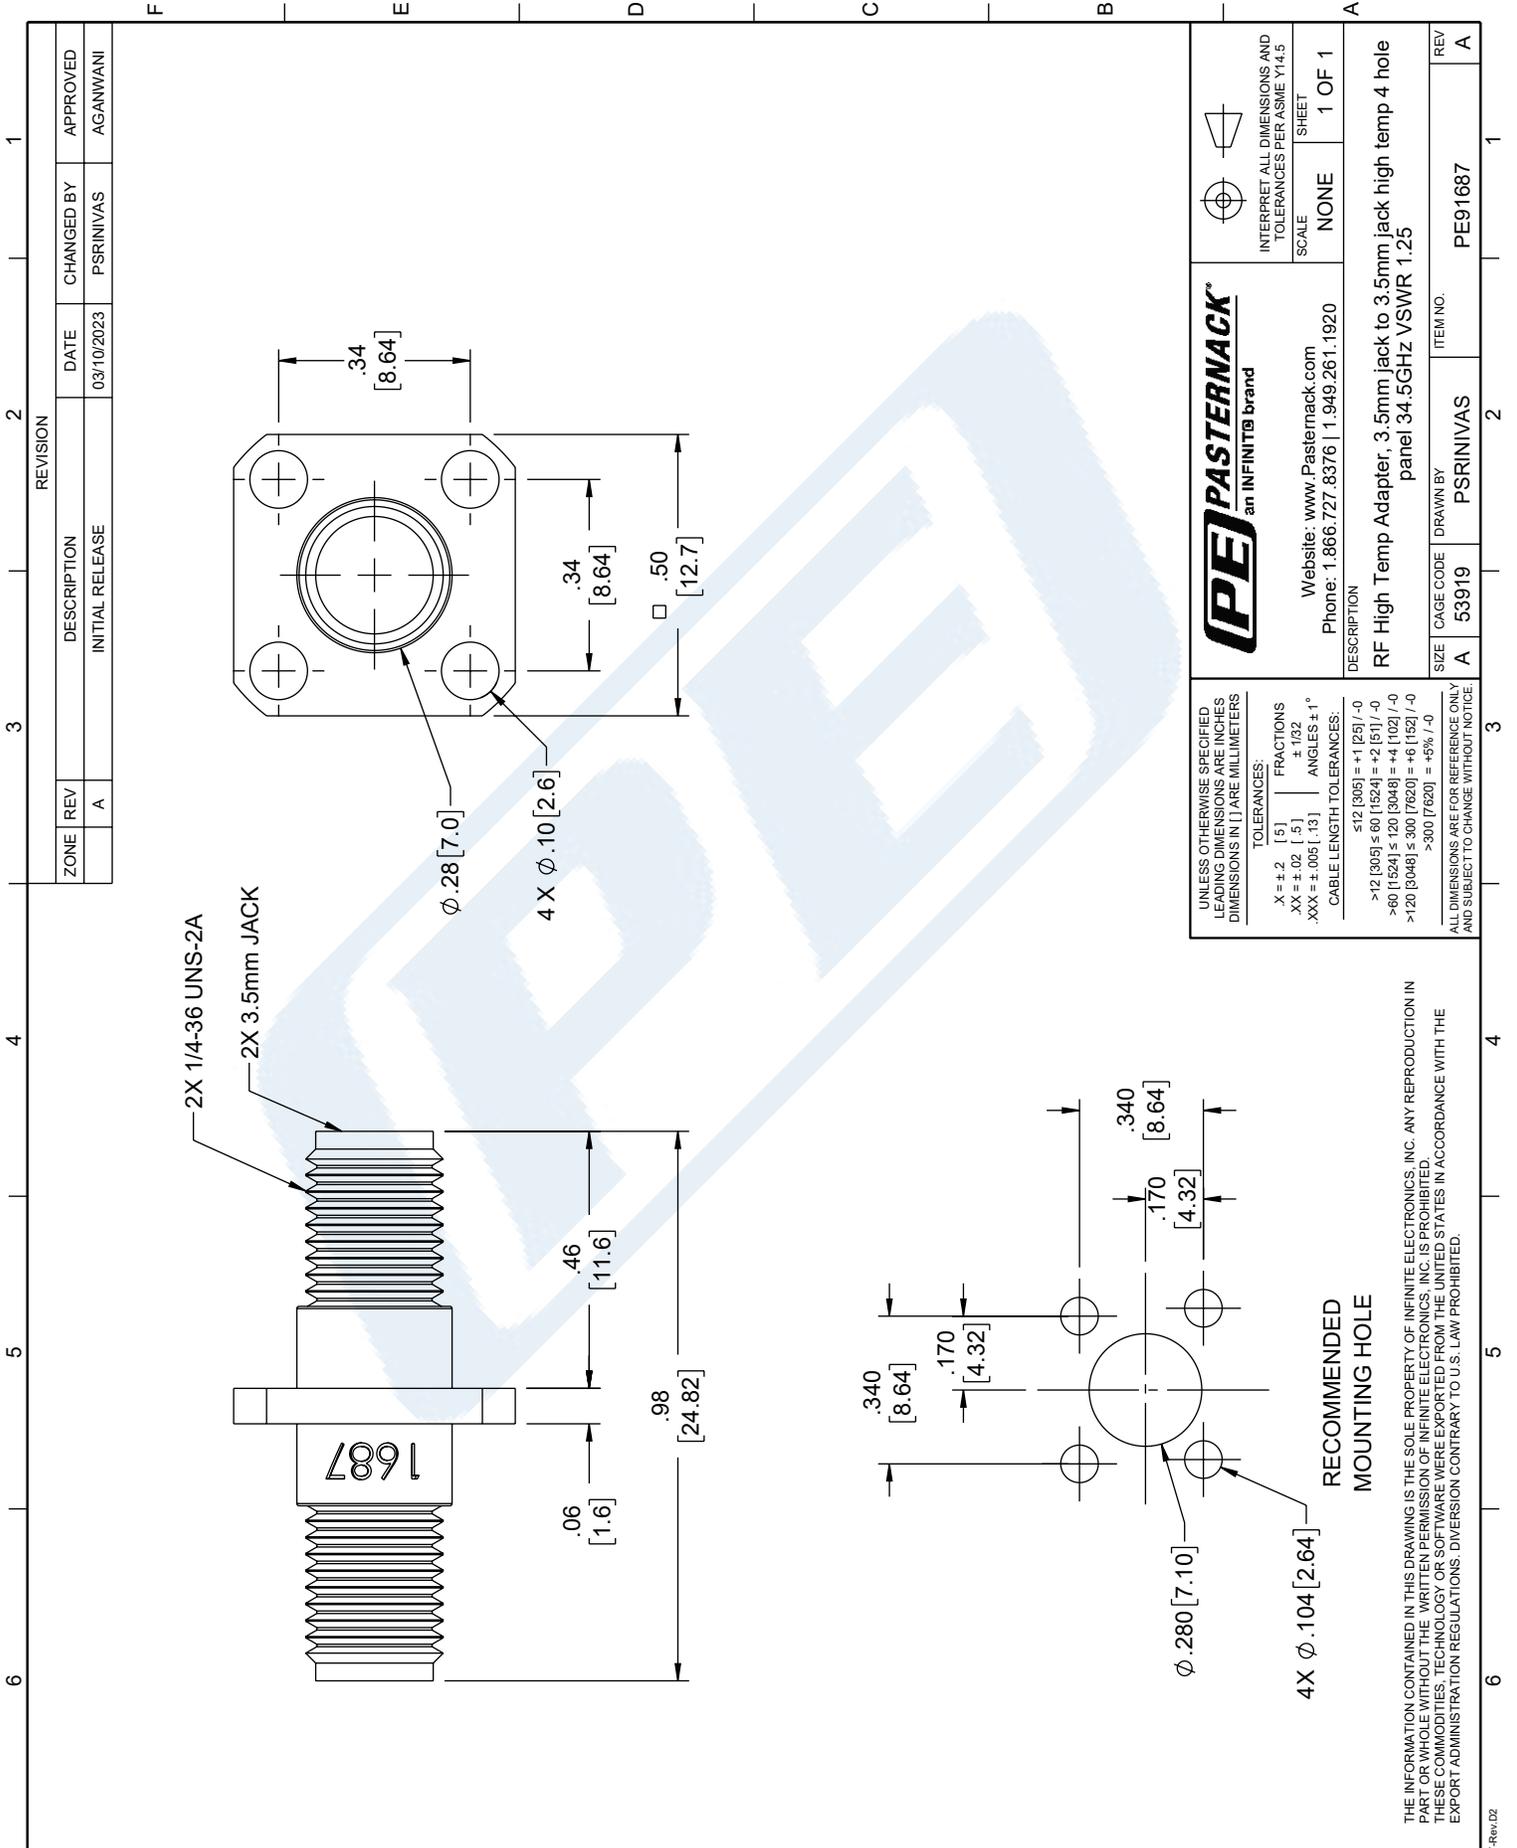

ZONE		REVISION		DATE		CHANGED BY		APPROVED	
A	1	INITIAL RELEASE		03/10/2023	PSRINIVAS	AGANWANI			

PE PASTERNAK
an INFINITI® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 X = ±.2 [5] FRACTIONS ±.1/32
 XX = ±.02 [.5] ANGLES ± 1°
 .XXX = ±.005 [.13] CABLE LENGTH TOLERANCES:
 $\le 12 [305] \le 60 [1524] = +1 [25] / -0$
 $>60 [1524] \le 120 [3048] = +4 [102] / -0$
 $>120 [3048] \le 300 [7620] = +6 [152] / -0$
 $>300 [7620] = +5% / -0$

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE

DESCRIPTION: RF High Temp Adapter, 3.5mm jack to 3.5mm jack high temp 4 hole panel 34.5GHz VSWR 1.25

SCALE: NONE SHEET: 1 OF 1

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SIZE: A CASE CODE: D53919 DRAWN BY: PSRINIVAS ITEM NO.: PE91687

REV: A