



## 75 Ohm N Male to F Female Adapter

### RF Adapters Technical Data Sheet

PE9396

#### Configuration

- N Male Connector 1
- F Female Connector 2
- 75 Ohms
- Straight Body Geometry

#### Features

- Gold Plated Contact
- 30 µ-in min Gold Contact Plating

#### Applications

- Allows Connection Between Series
- General Purpose Test

#### Description

Pasternack's PE9396 75 ohm type N male to type F female adapter is part of our full line of RF components available for same-day shipping. PE9396 type N male to type F female adapter operates to 1,000 MHz.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### Electrical Specifications

| Description            | Minimum | Typical | Maximum | Units |
|------------------------|---------|---------|---------|-------|
| Frequency Range        | DC      |         | 1,000   | MHz   |
| Operating Voltage (AC) |         |         | 500     | Vrms  |

#### Mechanical Specifications

|             |                     |
|-------------|---------------------|
| <b>Size</b> |                     |
| Length      | 1.346 in [34.19 mm] |
| Width       | 0.827 in [21.01 mm] |
| Weight      | 0.082 lbs [37.19 g] |

| Description | Connector 1 | Connector 2 |
|-------------|-------------|-------------|
| Type        | N Male      | F Female    |
| Polarity    | Standard    | Standard    |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm N Male to F Female Adapter PE9396](#)



## 75 Ohm N Male to F Female Adapter

### RF Adapters Technical Data Sheet

PE9396

#### Material Specifications

| Description     | Connector 1 |                            | Connector 2     |                            |
|-----------------|-------------|----------------------------|-----------------|----------------------------|
|                 | Material    | Plating                    | Material        | Plating                    |
| Type            | N Male      |                            | F Female        |                            |
| Contact         | Brass       | Gold<br>30 µ-in minimum    | Phosphor Bronze | Gold<br>30 µ-in minimum    |
| Insulation      | PTFE        |                            | PTFE            |                            |
| Outer Conductor |             |                            | Brass           | Nickel<br>100 µ-in minimum |
| Body            | Brass       | Nickel<br>100 µ-in minimum |                 |                            |
| Coupling Nut    | Brass       | Nickel<br>100 µ-in minimum |                 |                            |

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +60 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:


75 Ohm N Male to F Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm N Male to F Female Adapter PE9396](#)

URL: <https://www.pasternack.com/n-male-f-female-straight-adapter-pe9396-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9396 CAD Drawing  
75 Ohm N Male to F Female Adapter

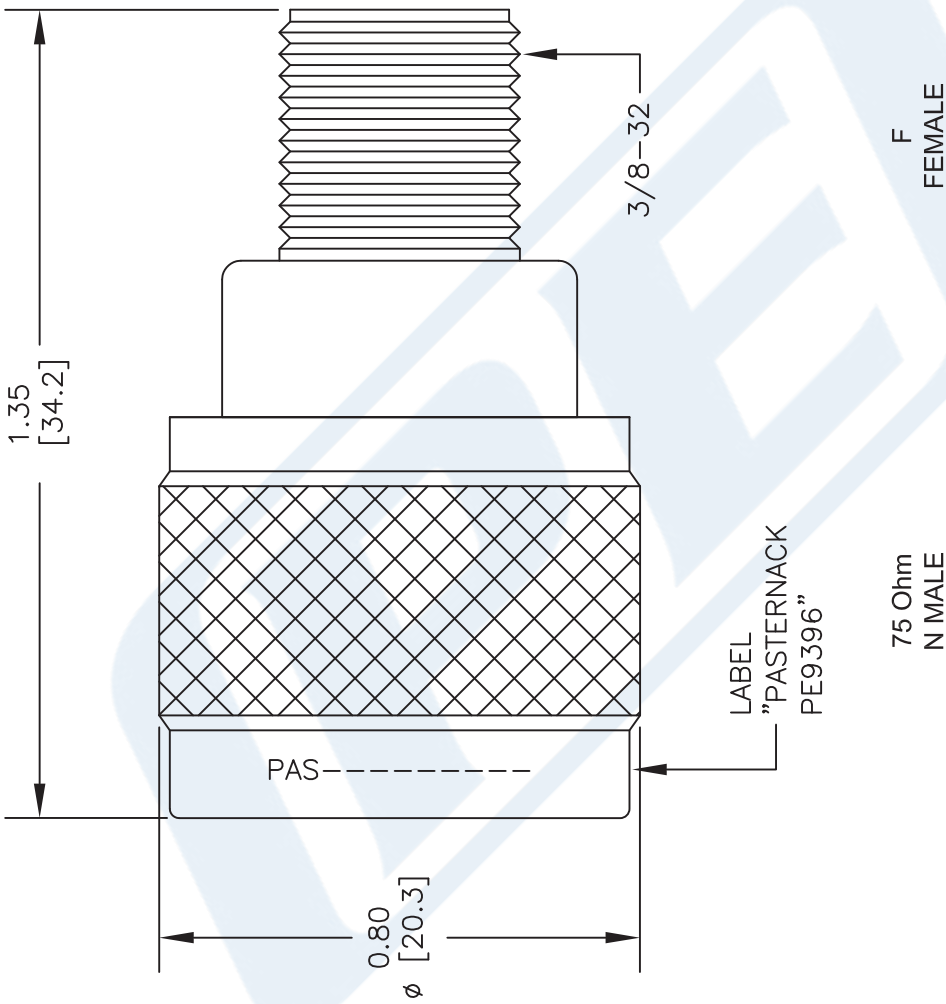

| STANDARD TOLERANCES |       |
|---------------------|-------|
| .X                  | ±0.2  |
| .XX                 | ±0.1  |
| .XXX                | ±0.05 |

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

**PE PASTERNAK**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE  
**PE9396**

FSCM NO. 53919

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 061416

SCALE N/A

SIZE A

2233