



SMA Female to 1.85mm Male Adapter

RF Adapters Technical Data Sheet

PE9726

Configuration

- SMA Female Connector 1
- 1.85mm Male Connector 2
- 50 Ohm
- Straight Body Geometry

Features

- Max VSWR of 1.3:1 up to 18 GHz
- SMA interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact
- Max VSWR of 1.3:1 up to 18 GHz
- SMA Interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact

Applications

- Allows Connection Between Series
- General Purpose Test
- Allows Connection Between Series
- General Purpose Test

Description

Pasternack's PE9726 SMA female to 1.85mm male adapter is part of our full line of RF components available for same-day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. The 1.85mm connector mates mechanically with commercially available 2.4mm connectors. Our SMA to 1.85mm adapter has a female to male gender configuration. PE9726 SMA female to 1.85mm male adapter operates to 18 GHz. The Pasternack RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.3:1	

Mechanical Specifications

Size	
Length	0.844 in [21.44 mm]
Width	0.312 in [7.92 mm]
Weight	0.013 lbs [5.9 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to 1.85mm Male Adapter PE9726](#)



SMA Female to 1.85mm Male Adapter

RF Adapters Technical Data Sheet

PE9726

Description	Connector 1	Connector 2
Type	SMA Female	1.85mm Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	
Hex Size		5/16 in.
Mating Torque		8 to 10 in-lbs 0.90 to 1.13 Nm

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	SMA Female		1.85mm Male	
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Outer Conductor	Passivated Stainless Steel			
Body			Passivated Stainless Steel	
Coupling Nut			Passivated Stainless Steel	

Environmental Specifications

Temperature

Operating Range -65 to +125 °C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to 1.85mm Male Adapter PE9726](#)



SMA Female to 1.85mm Male Adapter

RF Adapters Technical Data Sheet

PE9726

SMA Female to 1.85mm Male Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to 1.85mm Male Adapter PE9726](https://www.pasternack.com/sma-female-1.85mm-male-straight-adapter-pe9726-p.aspx)

URL: <https://www.pasternack.com/sma-female-1.85mm-male-straight-adapter-pe9726-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9726 CAD Drawing
SMA Female to 1.85mm Male Adapter

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PCR PE9726	12/30/2021	A. GANWANI

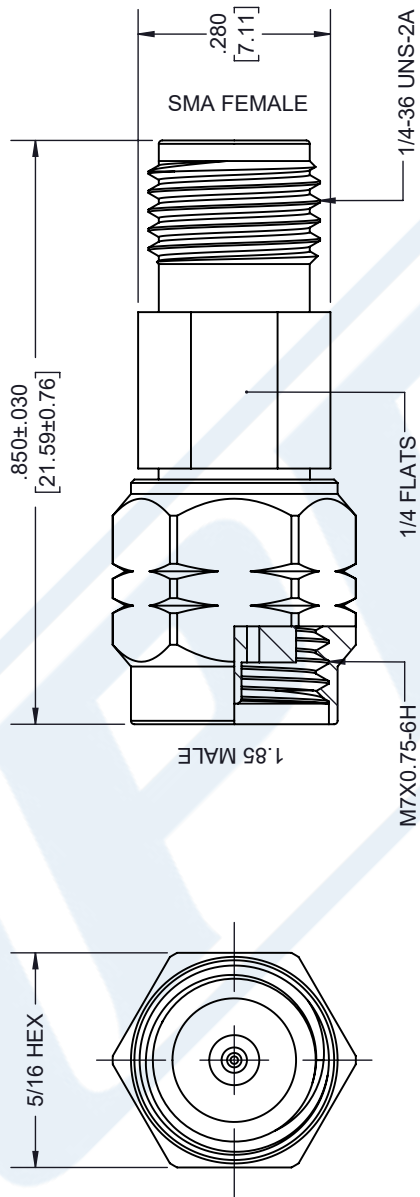

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS			<div> PASTERNAK® an INFINITE brand</div> <div>Pasternack Enterprises, Inc. P.O.Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com</div>			THIRD-ANGLE PROJECTION <div></div> <div>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.</div> <div>SHEET 1 OF 1</div> <div>SCALE N/A</div>											
TOLERANCES: X = ±.2 [.008] FRACTIONS .XX = ±.02 [.51] ± 1/32 .XXX = ±.005 [.13] ANGLES ± 1° CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5% / -0			SIZE A			CAGE CODE 53919			DRAWN BY K.DANG			ITEM NO. PE9726			REV A		
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.																	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.