



LF 3-SLOT TRB PLUG 78 OHM TERMINATOR W 6" CHAIN

RF Terminations Technical Data Sheet**PEMSY00002****Applications**

- TRB PLUG

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		500	MHz
Impedance		78		Ohms

Mechanical Specifications**Size**

Length	1.76 in [44.7 mm]
Width	0.56 in [14.22 mm]
Height	0.56 in [14.22 mm]
Weight	0.05 lbs [22.68 g]

Configuration

Connector	TRB 3-Slot Plug
Connector Specification	MIL-STD-1553

Material Specifications

Description	Material	Plating
Connector 1 Contact	Bronze	Gold 30 micro inches ASTM-B-488
Gasket	Rubber	
Body	Brass	Nickel ASTM-B-733

Environmental Specifications**Temperature**

Operating Range	-55 to +200 deg C
-----------------	-------------------

Compliance Certifications (see [product page](#) for current document)**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LF 3-SLOT TRB PLUG 78 OHM TERMINATOR W 6" CHAIN PEMS00002](#)



LF 3-SLOT TRB PLUG 78 OHM TERMINATOR W 6" CHAIN

RF Terminations Technical Data Sheet

PEMSY00002

LF 3-SLOT TRB PLUG 78 OHM TERMINATOR W 6" CHAIN from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LF 3-SLOT TRB PLUG 78 OHM TERMINATOR W 6" CHAIN PEMS00002](https://www.pasternack.com/lf-3-slot-trb-plug-78-ohm-terminator-w-6-chain-pemsy00002-p.aspx)

URL: <https://www.pasternack.com/lf-3-slot-trb-plug-78-ohm-terminator-w-6-chain-pemsy00002-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

F

E

D

C

B

A

F

E


D

C

B

A

.43
[11.0]
FLATS

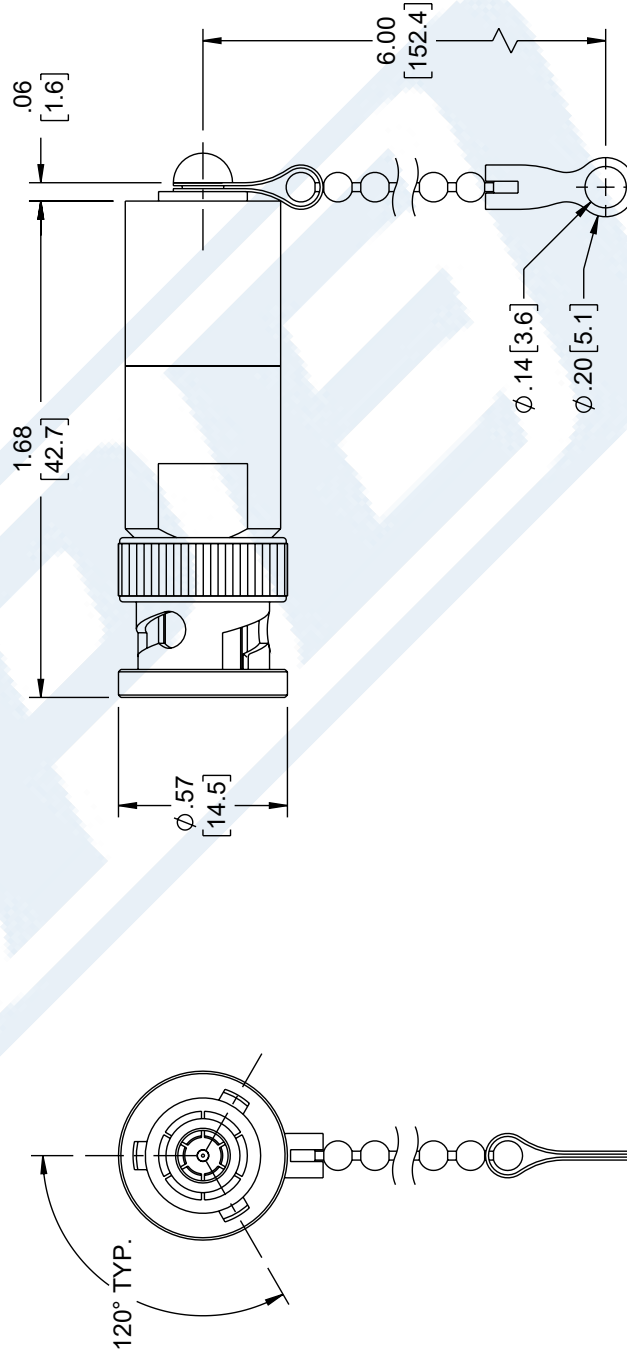

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE IN INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5] FRACTIONS ± 1/32

.XX = ±.02 [0.5] ANGLES ± 1°

.XXX = ±.005 [0.13] CABLE LENGTH TOLERANCES:

≤ 12 [305] = ±.1 [25] / -0

> 12 [305] ≤ 60 [1524] = ±.2 [51] / -0

> 60 [1524] ≤ 120 [3048] = ±.4 [102] / -0

> 120 [3048] = ±.5 [127] / -0

> 300 [7620] = ±.5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE
UN-DIMENSIONED NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

PE PASTERNAK
an INFINITI® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

LF 3-SLOT TRB PLUG 78 OHM TERMINATOR W 6" CHAIN



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE

NONE

SHEET

1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE DS Rev-D4 Asize