



4.1/9.5 Mini DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250

RF Connectors Technical Data Sheet



TC-250-4195M-RA-LP

Times Microwave Systems Connector Specification

Configuration

- 4.1/9.5 Mini DIN Male Connector
- 50 Ohms
- Right Angle Body Geometry
- Connector Interface Types: SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible cable compatibility, PE-1/4SFHC
- Low PIM Design

Features

- Max. Operating Frequency 3 GHz
- Excellent VSWR of 1.25:1
- PIM levels lower than -160 dBc
- Silver Plated Brass Contact
- 200 µin contact plating

Applications

- General Purpose Test
- Custom Cable Assemblies
- Distributed Antenna Systems (DAS)
- Wireless Communications
- Low PIM Applications

Description

Times Microwave's TC-250-4195M-RA-LP 4.1/9.5 Mini DIN male right angle connector offered by Pasternack with solder/solder attachment for Times' SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible cable compatibility and PE-1/4SFH is part of our full line of RF components available for same-day shipping. Times Microwave's 4.1/9.5 Mini DIN male connector operates up to a maximum frequency of 3 GHz and offers excellent VSWR of 1.25:1. The Times 4.1/9.5 Mini DIN male connector also has low passive intermodulation of -160 dBc. Its right angle body geometry allows for easier connections in tight spaces.

Times Microwave's 4.1/9.5 Mini DIN male right angle connector TC-250-4195M-RA-LP datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.25:1	
Insertion Loss			0.05	dB
Passive Intermodulation			-160	dBc
Operating Voltage (DC)			1,000	Vdc
Dielectric Withstanding Voltage (AC)			1,500	Vrms
Insulation Resistance	5,000			MOhms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.1/9.5 Mini DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250 TC-250-4195M-RA-LP](#)



4.1/9.5 Mini DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250

RF Connectors Technical Data Sheet



TC-250-4195M-RA-LP

Mechanical Specifications

Size	
Length	1.28 in [32.51 mm]
Width/Dia.	0.97 in [24.64 mm]
Height	0.97 in [24.64 mm]
Weight	0.1695 lbs [76.88 g]
Mating Cycles	500 Cycles
Mating Torque	88.51 to 106.21 in-lbs [10.00 to 12.00 Nm]
Cable Retention Force	80 lbs 36.29 kg

Material Specifications

Description	Material	Plating
Contact	Brass	Silver 200 µin
Insulation	PTFE	
Body	Brass	Silver 200 µin
Coupling Nut	Brass	Nickel 200 µin
Gasket	Silicone Rubber	

Environmental Specifications

Temperature	
Operating Range	-40 to +125 deg C
Shock	MIL-STD 202G, Method 213, Condition I
Vibration	MIL-STD 202G, Method 204, Condition B
Thermal Shock	MIL-STD 202G, Method 107, Condition B


Environmental Specification Notes:
IEC 60068 55/125/21

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.1/9.5 Mini DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250 TC-250-4195M-RA-LP](#)



4.1/9.5 Mini DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250

RF Connectors Technical Data Sheet



TC-250-4195M-RA-LP

4.1/9.5 Mini DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.1/9.5 Mini DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250 TC-250-4195M-RA-LP](https://www.pasternack.com/4.1-9.5-mini-din-male-connector-tc-250-4195m-ra-lp-p.aspx)

URL: <https://www.pasternack.com/4.1-9.5-mini-din-male-connector-tc-250-4195m-ra-lp-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

TIMES MICROWAVE SYSTEMS **TC-250-4195M-RA-LP CAD Drawing**
 4.1/9.5 Mini DIN Male Right Angle Low PIM Connector Solder
 Attachment for SPP-250-LLPL, SPF-250, SPO-250

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/21/2021	SRAUTUS

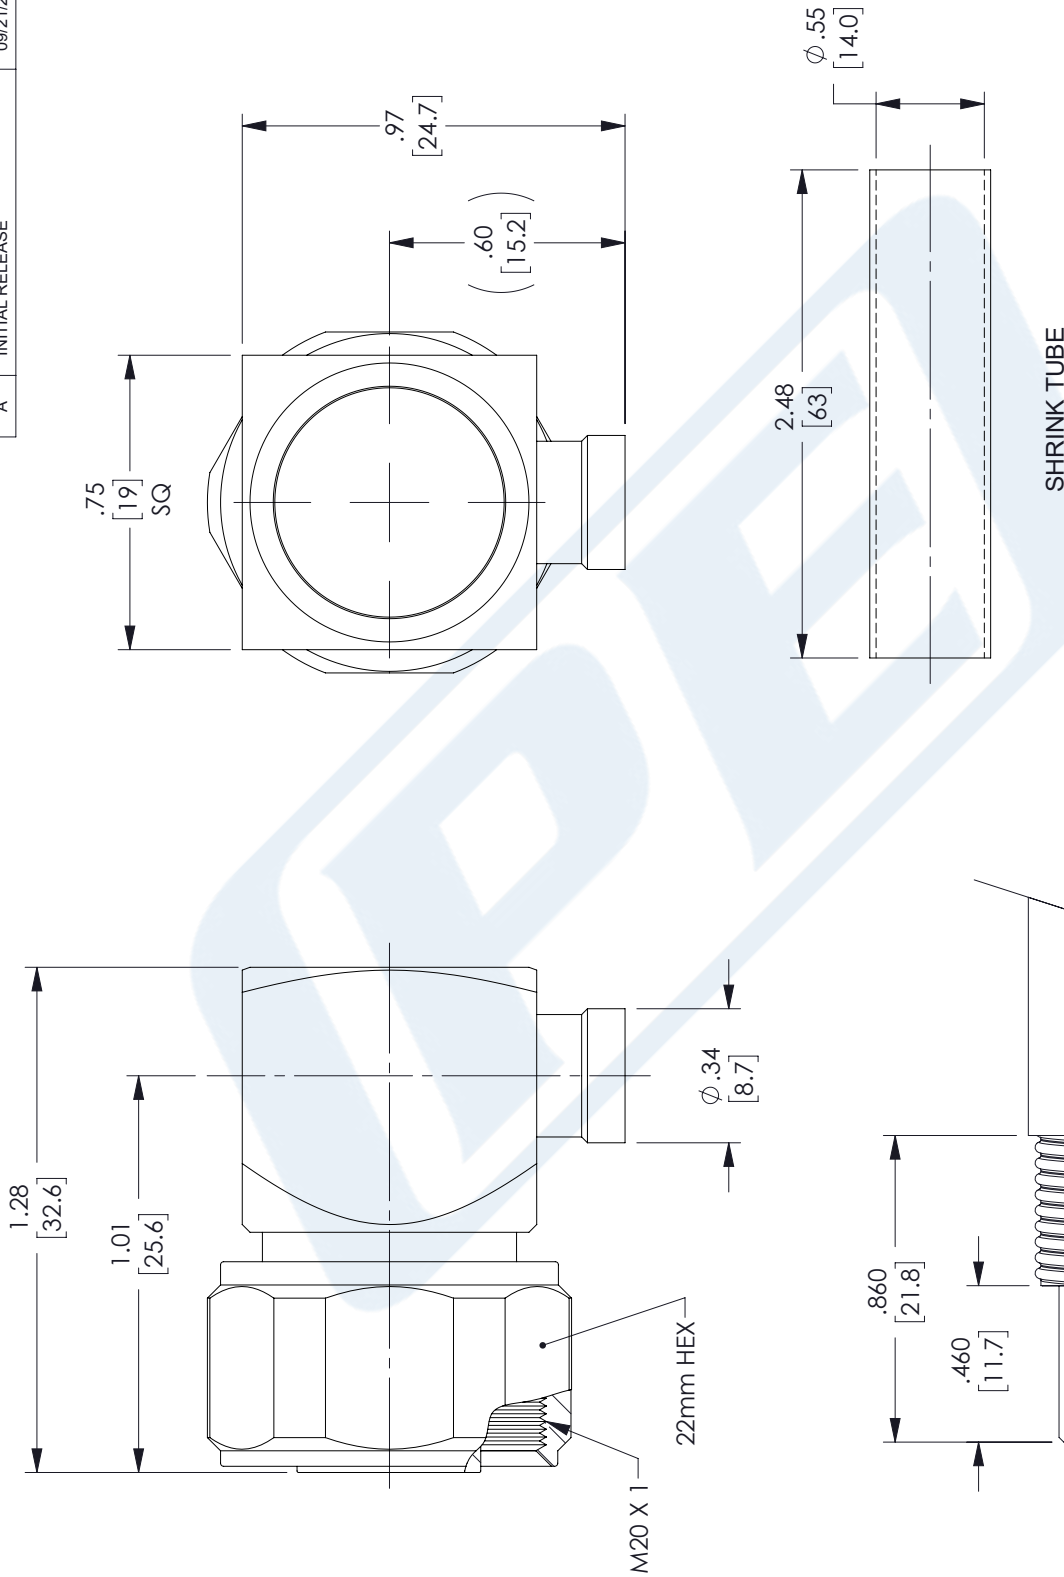

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

PASTERNAK
an INFINITE brand

Pasternack Enterprises, Inc.
 P.O. Box 16759, Irvine, CA 92623.
 Phone: 1.949.261.1920 | 1.866.727.8376
 Fax: 1.949.261.7451
 Website: www.pasternack.com
 E-mail: sales@pasternack.com

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ± .2	[.08]	FRACTIONS
.XX = ± .02	[.51]	± 1/32
.XXX = ± .005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	± .1 [25] / -0
12 [305] < L ≤ 60 [1524]	± .2 [51] / -0
60 [1524] < L ≤ 120 [3048]	± .4 [102] / -0
120 [3048] < L ≤ 300 [7620]	± .6 [152] / -0
300 [7620] < L	± .5% L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SIZE [] CAGE CODE [] DRAWN BY [] ITEM NO. []

A 53919 DMAY TC-250-4195M-RA-LP

REV A

- NOTES:
- CABLE ATTACHMENT:
 - OUTER: SOLDER.
 - INNER SOLDER.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.