



7/16 DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible

RF Connectors Technical Data Sheet



TC-250-716M-RA-LP

Times Microwave Systems Connector Specification

Configuration

- 7/16 DIN Male Connector
- 50 Ohms
- Right Angle Body Geometry
- Connector Interface Types: SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible cable compatibility, PE-1/4SFHC
- Low PIM Design

Features

- Max. Operating Frequency 6 GHz
- Good VSWR of 1.3:1
- PIM levels lower than -160 dBc
- Silver Plated Brass Contact
- 200 µin contact plating

Applications

- General Purpose Test
- Custom Cable Assemblies
- Distributed Antenna Systems (DAS)
- Wireless Communications
- Low PIM Applications

Description

Times Microwave's TC-250-716M-RA-LP 7/16 DIN male right angle connector offered by Pasternack with solder/solder attachment for Times' SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible cable compatibility and PE-1/4SFHC is part of our full line of RF components available for same-day shipping. Times Microwave's 7/16 DIN male connector operates up to a maximum frequency of 6 GHz and offers good VSWR of 1.3:1. The Times 7/16 DIN male connector also has low passive intermodulation of -160 dBc. Its right angle body geometry allows for easier connections in tight spaces.

Times Microwave's 7/16 DIN male right angle connector TC-250-716M-RA-LP datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.3:1	
Insertion Loss			0.1	dB
Passive Intermodulation			-160	dBc
Operating Voltage (DC)			1,500	Vdc
Dielectric Withstanding Voltage (AC)			4,000	Vrms
Inner Conductor DC Resistance			0.4	mOhms
Outer Conductor DC Resistance			1.5	mOhms
Insulation Resistance	10,000			MOhms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible TC-250-716M-RA-LP](#)



7/16 DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible

RF Connectors Technical Data Sheet



TC-250-716M-RA-LP

Mechanical Specifications

Size	
Length	1.39 in [35.31 mm]
Width/Dia.	1.26 in [32.00 mm]
Height	1.26 in [32 mm]
Weight	0.1545 lbs [70.08 g]
Mating Cycles	500 Cycles
Mating Torque	221.23 in-lbs [25.00 Nm]
Cable Retention Force	200 lbs 90.72 kg

Material Specifications

Description	Material	Plating
Contact	Brass	Silver 200 µin
Insulation	PTFE	
Body	Brass	Tri-Metal 100 µin
Coupling Nut	Brass	Tri-Metal 100 µin
Gasket	Silicone Rubber	

Environmental Specifications

Temperature	
Operating Range	-40 to +125 deg C
Humidity	IP67
Shock	MIL-STD 202G, Method 213, Condition I
Vibration	MIL-STD 202G, Method 204, Condition B
Thermal Shock	MIL-STD 202G, Method 107, Condition B

Environmental Specification Notes:
IEC 60068 55/125/21

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible TC-250-716M-RA-LP](#)



7/16 DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible

RF Connectors Technical Data Sheet



TC-250-716M-RA-LP

7/16 DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Right Angle Low PIM Connector Solder Attachment for SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible TC-250-716M-RA-LP](https://www.pasternack.com/7-16-din-male-spp-250-llpl-connector-tc-250-716m-ra-lp-p.aspx)

URL: <https://www.pasternack.com/7-16-din-male-spp-250-llpl-connector-tc-250-716m-ra-lp-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

TIMES MICROWAVE SYSTEMS **TC-250-716M-RA-LP CAD Drawing**
7/16 DIN Male Right Angle Low PIM Connector Solder Attachment for
SPP-250-LLPL, SPF-250, SPO-250, 1/4 inch Superflexible

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/2/21	SRAUTUS

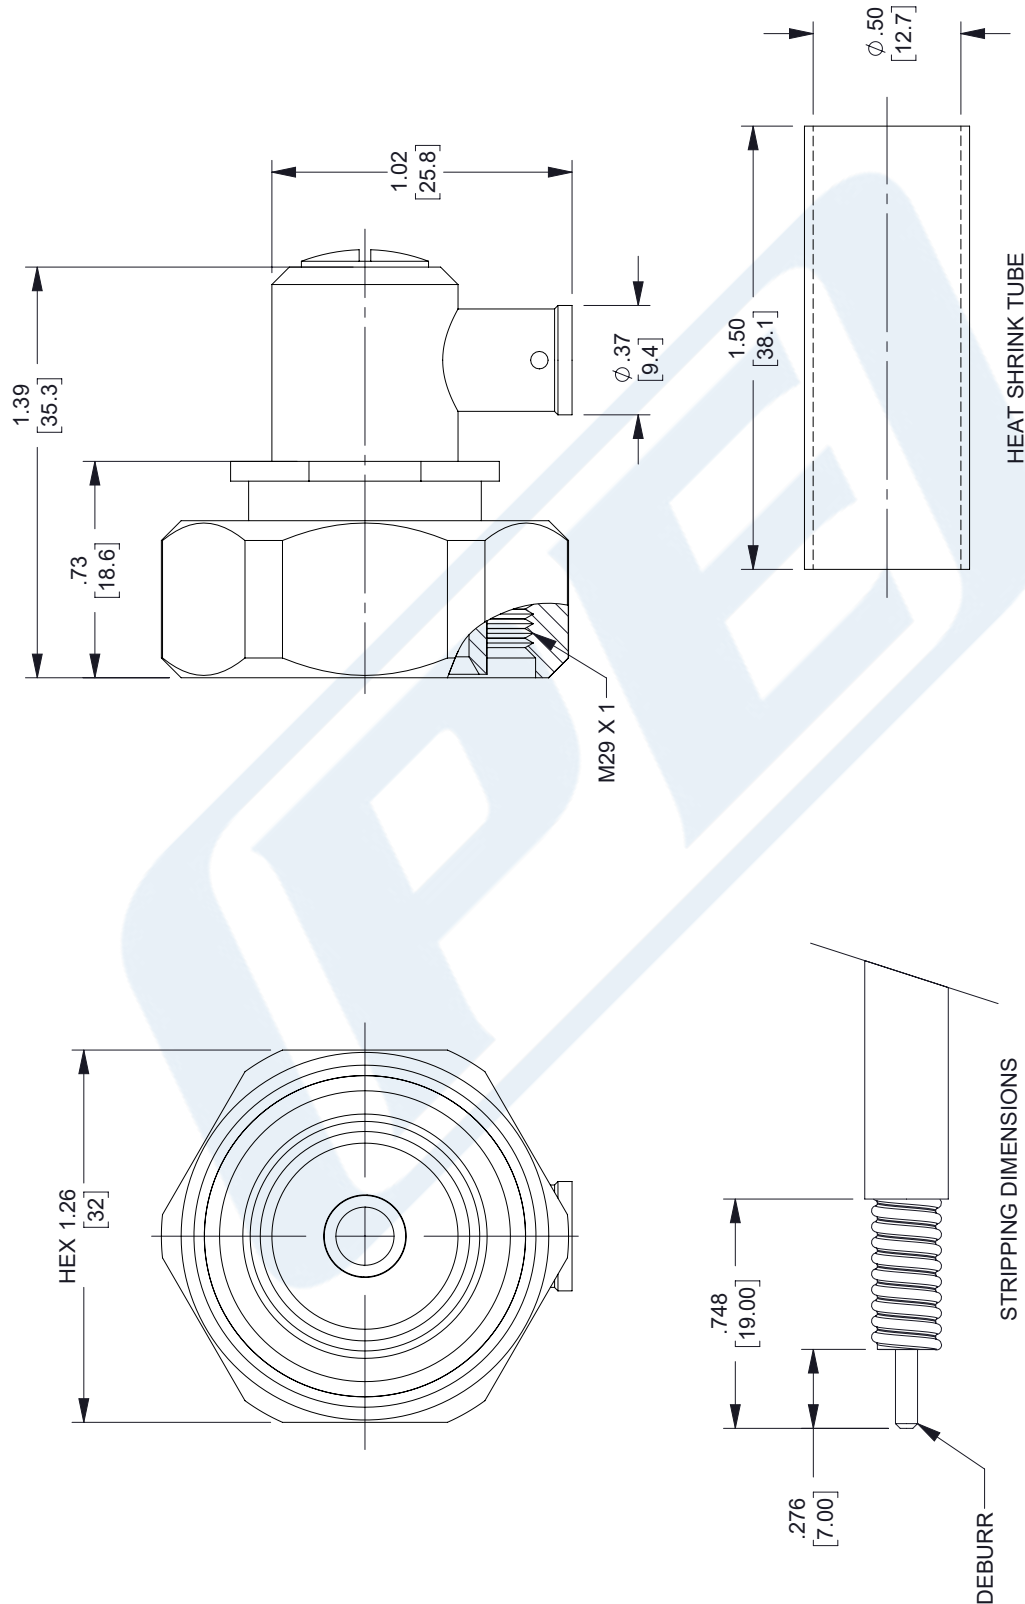

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

FRACCTIONS	ANGLES	CABLE LENGTH (L)	TOLERANCES
.X = ± .2	± 1/32	L ≤ 12 [305]	± .1 [25] / -0
.XX = ± .02	± .13	12 [305] < L ≤ 60 [1524]	± .2 [51] / -0
.XXX = ± .005	± .13	60 [1524] < L ≤ 120 [3048]	± .4 [102] / -0
		120 [3048] < L ≤ 300 [7620]	± .6 [152] / -0
		300 [7620] < L	± .5% L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PASTERNACK
an INFINITI brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1
SCALE N/A

SIZE CAGE CODE DRAWN BY ITEM NO.
A 53919 DMAY TC-250-716M-RA-LP

- NOTES:
- CABLE ATTACHMENT:
• OUTER: SOLDER.
• INNER: SOLDER.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.