

7/16 DIN Male Low PIM Connector Clamp/Solder Attachment for TCOM-400, TCOM-400-FR, LMR-400, LMR-400-DB, LMR-400-FR, LMR-400-UF



TCP-400-716MC-LP

Configuration

- 7/16 DIN Male Connector
- IEC-61169-4
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: TCOM-400, TCOM-400-FR, LMR-400, LMR-400-DB, LMR-400-FR, LMR-400-UF, LMR-LW400, PE-C400, PE-B400, PE-B405
- Low PIM Design

Features

- Max. Operating Frequency 6 GHz
- Good VSWR of 1.3:1
- PIM levels lower than -160 dBc
- Silver Plated Brass Contact
- 200 µin minimum contact plating

Applications

- General Purpose Test
- Wireless Communications
- Custom Cable Assemblies
- Low PIM Applications

Description

Pasternack's TCP-400-716MC-LP, 7/16 DIN, Low PIM, Connector is part of our full line of RF components available for same-day shipping. Our 7/16 DIN male connector operates up to a maximum frequency of 6 GHz and offers good VSWR of 1.3:1. The 7/16 DIN male connector also has low passive intermodulation of -160 dBc.

Our 7/16 DIN male connector TCP-400-716MC-LP datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.3:1	
Insertion Loss			0.245	dB
Passive Intermodulation			-160	dBc
Impedance		50		Ohms

Mechanical Specifications

Size

Length	1.758 in [44.65 mm]
Width	1.26 in [32 mm]
Height	1.26 in [32 mm]
Weight	0.14 lbs [63.5 g]
Mating Cycles	500 Cycles
Mating Torque	44.25 in-lbs [[5.00 Nm]]

7/16 DIN Male Low PIM Connector Clamp/Solder Attachment for TCOM-400, TCOM-400-FR, LMR-400, LMR-400-DB, LMR-400-FR, LMR-400-UF



TCP-400-716MC-LP

Material Specifications

Description	Material	Plating
Contact	Brass	Silver 200 µin minimum
Insulation	PTFE	
Body	Brass	Tri-Metal 80 µin minimum
Retaining Ring	Brass	Silver 200 µin minimum
Gasket	Silicone	
Crimp Sleeve	Brass	Tri-Metal

Environmental Specifications

Temperature

Operating Range

-40 to +125 deg C

Shock

MIL-STD-202G, Meth.213, Con.I

Vibration

MIL-STD-202G, Meth.204, Cond.B

Thermal Shock

MIL-STD-202G, Meth.107, Cond.B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

7/16 DIN Male Low PIM Connector Clamp/Solder Attachment for TCOM-400, TCOM-400-FR, LMR-400, LMR-400-DB, LMR-400-FR, LMR-400-UF

TCP-400-716MC-LP



Assembly Instruction

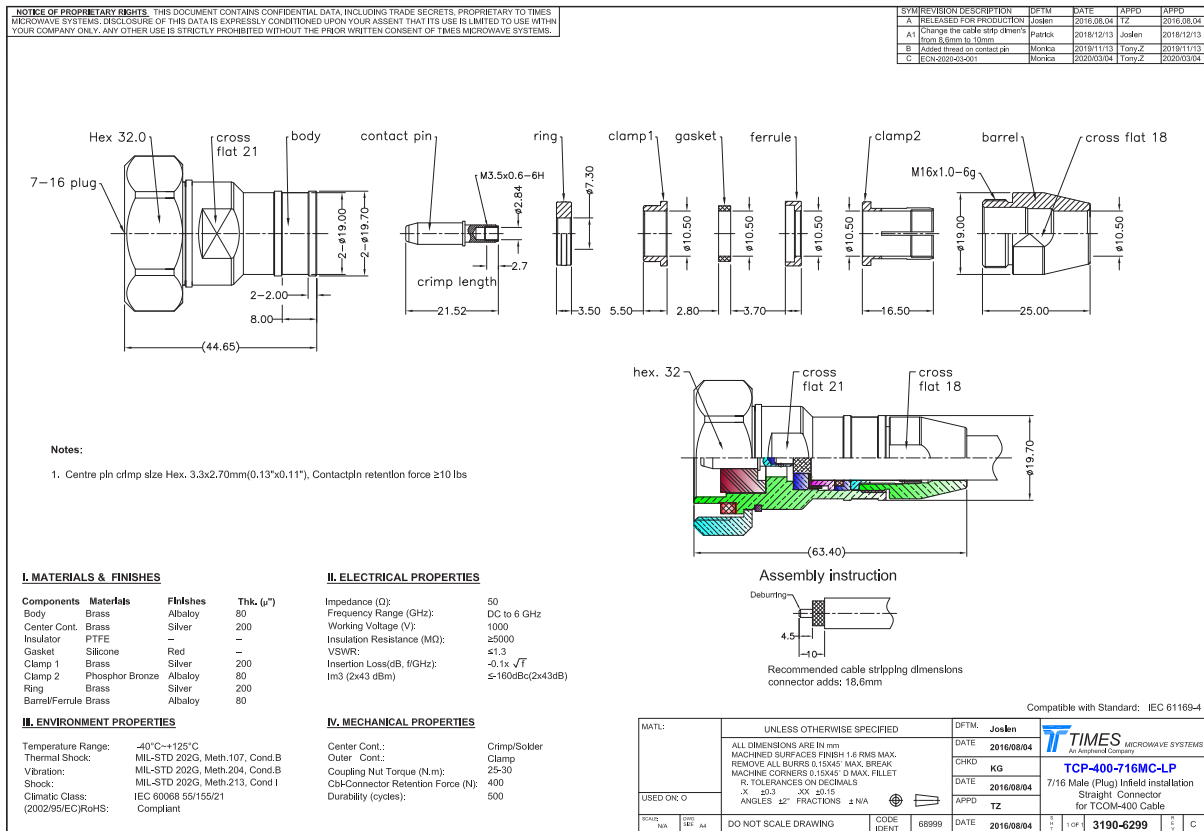

7/16 DIN Male Low PIM Connector Clamp/Solder Attachment for TCOM-400, TCOM-400-FR, LMR-400, LMR-400-DB, LMR-400-FR, LMR-400-UF from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Low PIM Connector Clamp/Solder Attachment for TCOM-400, TCOM-400-FR, LMR-400, LMR-400-DB, LMR-400-FR, LMR-400-UF TCP-400-716MC-LP](https://www.pasternack.com/7-16-din-male-tcom-400-connector-tcp-400-716mc-lp-p.aspx)

URL: <https://www.pasternack.com/7-16-din-male-tcom-400-connector-tcp-400-716mc-lp-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

TCP-400-716MC-LP CAD Drawing
7/16 DIN Male Low PIM Connector Clamp/Solder Attachment for TCOM-400, TCOM-400-FR, LMR-400, LMR-400-DB, LMR-400-FR, LMR-400-UF

