
1-1337445-0 - ACTIVE

TE Internal #: 1-1337445-0 BNC Connector, Jack, 50 ohm, Bayonet, 4 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Brass

View on TE.com >

connectivity

Connectors > RF Connectors > Coax Connectors

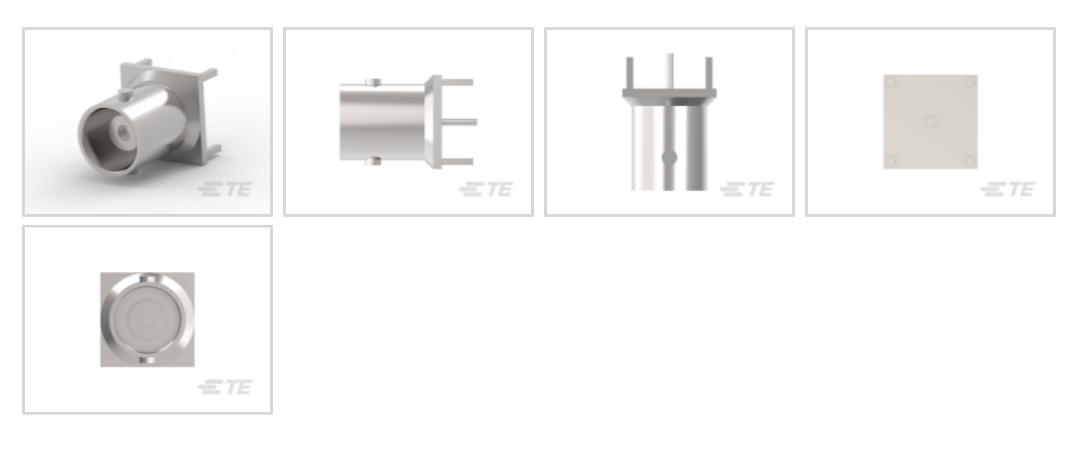

RF Interface: BNC

RF Connector Style: Jack

RF Connector Mated Outer Diameter (Approximate): 14.53 mm [.572 in]

Impedance: 50Ω

RF Connector Coupling Mechanism: Bayonet

Features

Product Type Features

Connector Shape	Rectangular
RF Interface	BNC
RF Connector Style	Jack
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Vertical
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Body Material	Brass

BNC Connector, Jack, 50 ohm, Bayonet, 4 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Brass



Body Plating Material	Silver
Contact Features	
RF Connector Center Contact Plating Material	Silver (Ag)
RF Connector Center Contact Material	Brass
Termination Features	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	4 mm[.157 in]
Mechanical Attachment	
PCB Mount Retention	With
RF Connector Coupling Mechanism	Bayonet
Connector Mounting Type	Board Mount
RF Contact Captivation Method	Mechanical
Detent	With
Dimensions	
Mounting Post Length	4.5 mm[.177 in]
Profile Height from PCB	13 mm[.511 in]
RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]
Operation/Application	
Operating Frequency	4 GHz
Packaging Features	
Packaging Quantity	50
Packaging Method	Bag
Other	
Grade	Professional
Dielectric Material	PTFE
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions

C For support call+1 800 522 6752

BNC Connector, Jack, 50 ohm, Bayonet, 4 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Brass



EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (3.32% in 4796395) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts




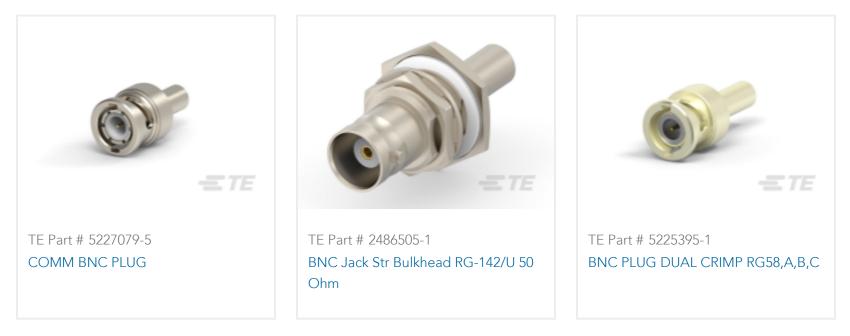

BNC Connector, Jack, 50 ohm, Bayonet, 4 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Brass



Customers Also Bought

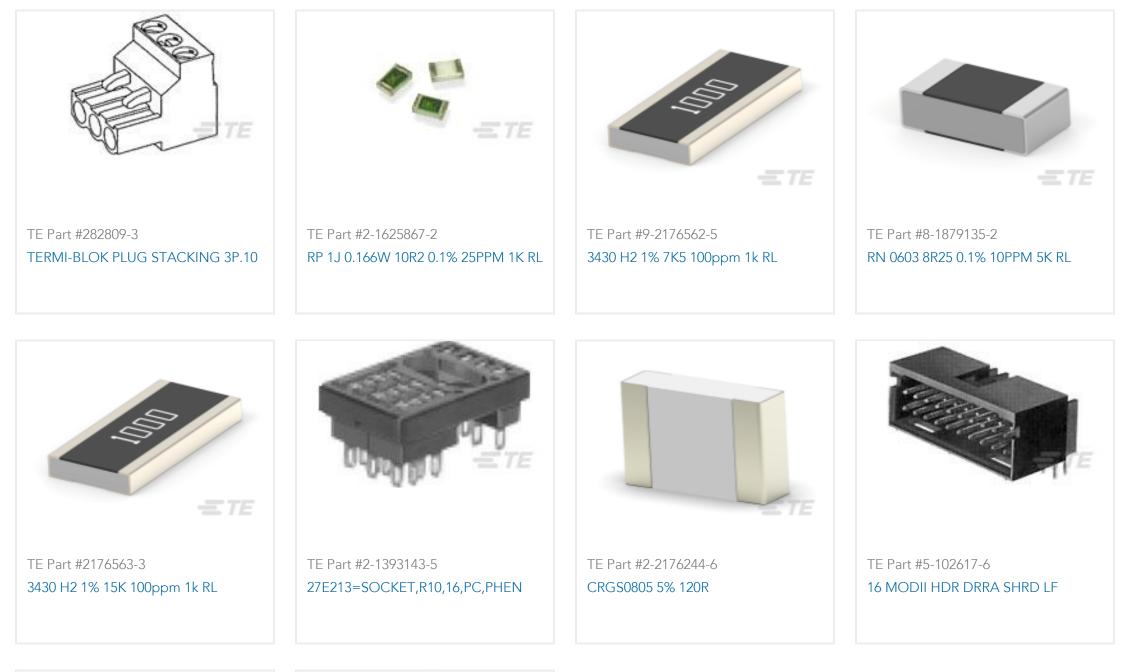



Documents

Product Drawings BNC Str PCB Skt 50Ohm Silver P

English

CAD Files

3D PDF

English

Customer View Model ENG_CVM_1-1337445-0_C.3d_igs.zip

English

Customer View Model

ENG_CVM_1-1337445-0_C.3d_stp.zip

English

Customer View Model

ENG_CVM_1-1337445-0_C.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

S For support call+1 800 522 6752

04/13/2025 01:29AM | Page 4

BNC Connector, Jack, 50 ohm, Bayonet, 4 GHz, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Brass



Product Specifications Product Specification

English