#### Buchanan | BUCHANAN 4 Series

TE Internal #: 1-1437649-5 12 Position Barrier Strip, Tri-Barrier, Printed Circuit Pin Bottom Termination, Wire-to-Board, 8.26 mm [.325 in] Centerline, 1 Row, BUCHANAN 4 Series

#### View on TE.com >

#### Connectors > Terminal Blocks & Strips > Barrier Strips



Number of Positions: 12 Barrier Strip Style: Tri-Barrier Bottom Termination Type: Printed Circuit Pin Connector System: Wire-to-Board Centerline (Pitch): 8.26 mm [.325 in ]

## Features



### Product Type Features

| Block Style                       | Flat Bottom with standoffs |
|-----------------------------------|----------------------------|
| Connector System                  | Wire-to-Board              |
| Connector & Contact Terminates To | Printed Circuit Board      |
| Configuration Features            |                            |
| Number of Levels                  | 1                          |
| Number of Positions               | 12                         |
| Number of Rows                    | 1                          |
| Electrical Characteristics        |                            |
| Operating Voltage                 | 150 V, 300 V               |
| Body Features                     |                            |
| Primary Product Color             | Black                      |
| Product Orientation               | Vertical                   |
| Barrier Strip Style               | Tri-Barrier                |

12 Position Barrier Strip, Tri-Barrier, Printed Circuit Pin Bottom Termination, Wire-to-Board, 8.26 mm [.325 in] Centerline, 1 Row, BUCHANAN 4 Series



## **Contact Features**

| Contact Base Material                         | Copper Alloy          |
|---|-----------------------|
| PCB Contact Termination Area Plating Material | Tin                   |
| Contact Current Rating (Max)                  | 20 A                  |
| Termination Features                          |                       |
| Bottom Termination Type                       | Printed Circuit Pin   |
| Mechanical Attachment                         |                       |
| Top Termination Type                          | Wire Clamp Combo Head |
| Mounting Options                              | None                  |
| Screw Plating Material                        | Zinc                  |
| Screw Material                                | Steel                 |
| Thread Size                                   | 4-40                  |
| Screw Head Type                               | Combo Phil-Slot       |
| Connector Mounting Type                       | Board Mount           |
| Housing Features                              |                       |
| Housing Material                              | Polyamide             |

Centerline (Pitch)

8.26 mm[.325 in]

| <b>D</b> | •    | •    |    |
|----------|------|------|----|
| 1)       | imer | າເມ  | nc |
|          |      | 1010 |    |

| Product Length   | 100.71 mm[3.955 in] |
|--|---------------------|
| Wire Size  | 22 – 12 AWG         |
| Operation/Application  |                     |
| Circuit Application  | Power               |
| Industry Standards   |                     |
| UL Flammability Rating   | UL 94V-0            |
| Packaging Features   |                     |
| Packaging Method   | Package             |
| Packaging Quantity   | 140                 |
| <b>Product Compliance</b><br>For compliance documentation, visit the product page on TE.com> |                     |
| EU RoHS Directive 2011/65/EU   | Compliant           |
| EU ELV Directive 2000/53/EC  | Compliant           |

12 Position Barrier Strip, Tri-Barrier, Printed Circuit Pin Bottom Termination, Wire-to-Board, 8.26 mm [.325 in] Centerline, 1 Row, BUCHANAN 4 Series



| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |
|---|--|
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025<br>(247)<br>Candidate List Declared Against: JUNE<br>2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free  |
|   |  |

Solder Process Capability

Wave solder capable to 265°C


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




# Also in the Series | BUCHANAN 4 Series

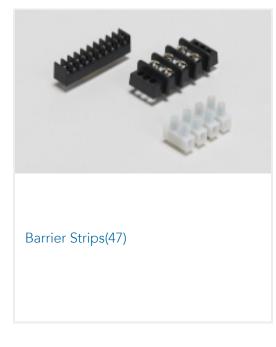

**Customers Also Bought** 

12 Position Barrier Strip, Tri-Barrier, Printed Circuit Pin Bottom Termination, Wire-to-Board, 8.26 mm [.325 in] Centerline, 1 Row, BUCHANAN 4 Series



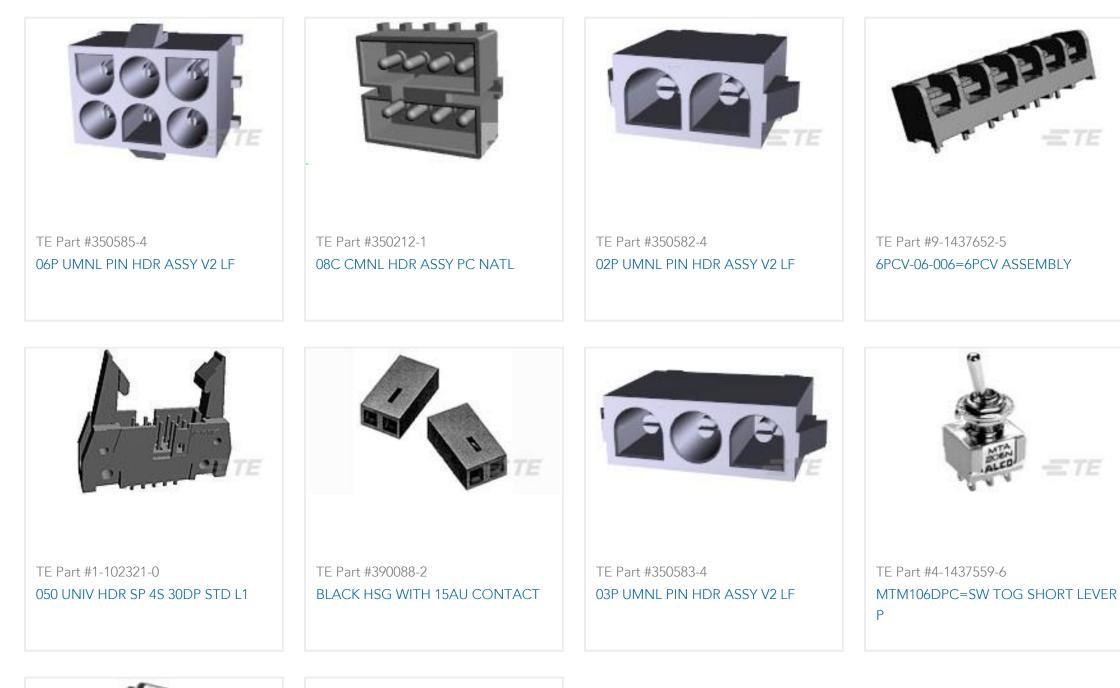



## Documents

Product Drawings 4PCV-12-006=4PCV ASSEMBLY

English

CAD Files Customer View Model ENG\_CVM\_CVM\_1-1437649-5\_T1.3d\_stp.zip English Customer View Model ENG\_CVM\_CVM\_1-1437649-5\_T1.3d\_igs.zip English Customer View Model ENG\_CVM\_CVM\_1-1437649-5\_T1.2d\_dxf.zip English 3D PDF

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

#### Datasheets & Catalog Pages

**C** For support call+1 800 522 6752

12 Position Barrier Strip, Tri-Barrier, Printed Circuit Pin Bottom Termination, Wire-to-Board, 8.26 mm [.325 in] Centerline, 1 Row, BUCHANAN 4 Series



1-1773458-2\_BARRIER\_STRIPS\_QUICK\_REFERENCE\_GUIDE

English