

## CII

TE Internal #: 1-1617029-3 General Purpose Signal Relay, DC, Non-Polarized, Monostable, 2 Form C DPDT-CO, 2 A Contact Rating, 26.5 VDC Coil Voltage, 1 W Coil Power

View on TE.com >

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: General Purpose Signal Relay

Current Type: DC

Coil Magnetic System: Non-Polarized, Monostable

Contact Arrangement: 2 Form C DPDT-CO

Contact Current Rating: 2A

## Features

## Product Type Features

Relay & Contactor Type

**E T E connectivity** 

General Purpose Signal Relay

## **Configuration Features**

Contact Arrangement	2 Form C DPDT-CO	
Electrical Characteristics		
Coil Resistance	700 Ω	
Contact Current Rating	2 A	
Coil Voltage Rating	26.5 VDC	
Coil Power Rating DC	1 W	
Body Features		
Enclosure Type	Hermetically Sealed	
Termination Features		
Main Termination & Connection Type	Solder Hook Terminals	
Coil Termination & Connection Type	Solder Hook Terminals	
Mechanical Attachment		
Product Mount Type	Chassis Mount	
Usage Conditions		
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]	

**C** For support call+1 800 522 6752

04/13/2025 02:46AM | Page 1

## HFW1130K06P

General Purpose Signal Relay, DC, Non-Polarized, Monostable, 2 Form C DPDT-CO, 2 A Contact Rating, 26.5 VDC Coil Voltage, 1 W Coil Power



Environmental Ambient Temperature (Max)	125 °C[257 °F]			
Operation/Application				
Vibration Resistance	30G's, 10 – 3000Hz			
Shock Resistance	100G's, 6ms			
Current Type	DC			
Coil Magnetic System	Non-Polarized, Monostable			

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

LICC

### Solder Process Capability

#### Not lead free process capable

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


## HFW1130K06P

General Purpose Signal Relay, DC, Non-Polarized, Monostable, 2 Form C DPDT-CO, 2 A Contact Rating, 26.5 VDC Coil Voltage, 1 W Coil Power





# Customers Also Bought

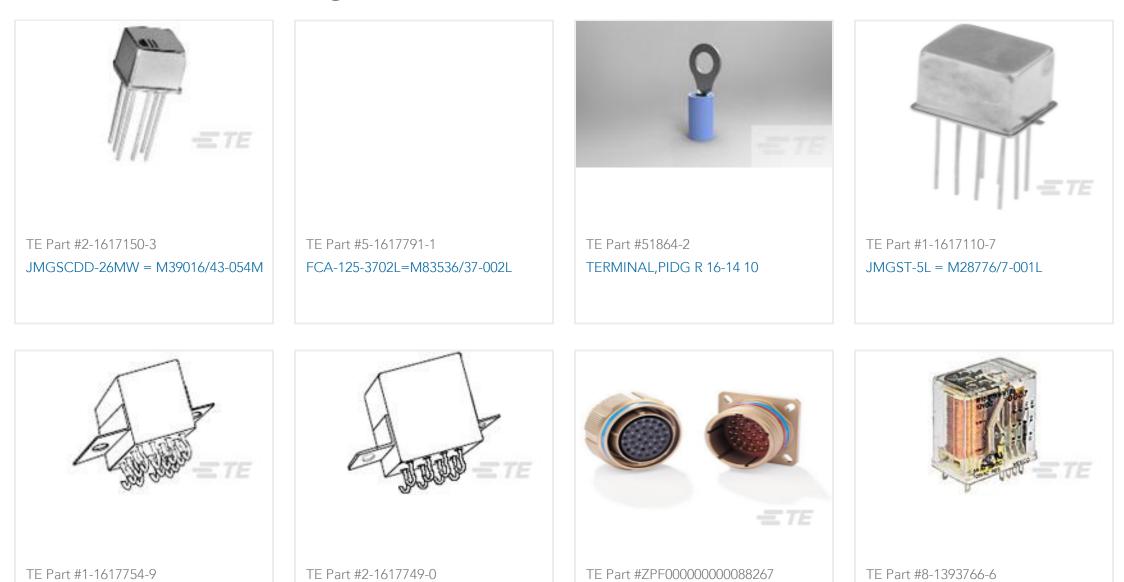

FCA-410-10211VI=IVI03330/10-0211VI	FCA-210-1023IVI=IVI03330/10-023IVI	DTD 20 D 09-33 AN	KTU-ETZO-V43U=KTU
TE Part #2-1617006-2	TE Part #1616021-7		
3SAV1694A3 = RELAY	SA192=CONTACTOR		

DTD 2/ D 00 2E ANI

D10 E17/ 1/100 D10

ECA 210 1022NA NA02E2//10 022NA

## Documents

ECA 410 1/01NA NA02E2//1/ 001NA

Product Drawings HFW1130K06P = M39016/6-104P

English

Datasheets & Catalog Pages 5-1773450-5\_sec1\_HFW

English