## 

Kilovac | Kilovac WD TE Internal #: 1-1618058-2 Protective Relay, AC & DC, 1 Form C SPDT-CO, 5 A Contact Rating, DIN Rail, 60 °C [140 °F], Kilovac WD View on TE.com >



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: Protective Relay Current Type: AC & DC Contact Arrangement: 1 Form C SPDT-CO Contact Current Rating: 5A

Main Termination & Connection Type: Screw Terminals

### Features

### Product Type Features

Relay & Contactor Type

### **Configuration Features**

Phase

Contact Arrangement

Protective Relay

Single or Three

1 Form C SPDT-CO

### **Electrical Characteristics**

Input Voltage	100 – 140 VAC
Contact Current Rating	5 A
Signal Characteristics	
Frequency Adjustment	40 – 400 Hz
Termination Features	
Main Termination & Connection Type	Screw Terminals
Coil Termination & Connection Type	Screw Terminals
Mechanical Attachment	
Product Mounting Feature Type	Mounting Hole, Snap-On
Product Mount Type	DIN Rail
Dimensions	
Product Width	73 mm[2.87 in]
Product Length	75 mm[2.95 in]

### WD2759-003

Protective Relay, AC & DC, 1 Form C SPDT-CO, 5 A Contact Rating, DIN Rail, 60 °C [140 °F], Kilovac WD



Product Height	112 mm[4.41 in]
Jsage Conditions	
Operating Temperature Range	-40 - 60 °C[-40 - 140 °F]
Environmental Ambient Temperature (Max)	60 °C[140 °F]
Operation/Application	
Protection Function	Over/Undervoltage
Current Type	AC & DC
Product Compliance	
or compliance documentation, visit the product page on TE.com>	Not Compliant
•	Not Compliant Not Compliant
or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant Not Compliant Not Compliant Restricted Materials Above Threshold
or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Not Compliant
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Not Compliant Restricted Materials Above Threshold Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2022 (240)

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

## **Compatible Parts**

### WD2759-003

Protective Relay, AC & DC, 1 Form C SPDT-CO, 5 A Contact Rating, DIN Rail, 60 °C [140 °F], Kilovac WD






# Also in the Series Kilovac WD



# Customers Also Bought





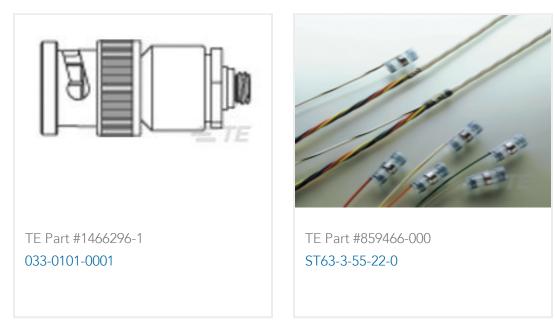

### WD2759-003

Protective Relay, AC & DC, 1 Form C SPDT-CO, 5 A Contact Rating, DIN Rail, 60 °C [140 °F], Kilovac WD



## Documents

Product Drawings WD2759-003=OVER/UNDERVOLTAGE R

English

Datasheets & Catalog Pages 5-1773450-5\_sec11\_KILOVAC\_WD

English

RELAY

English