




Connectors > PCB Connectors > PCB Headers & Receptacles

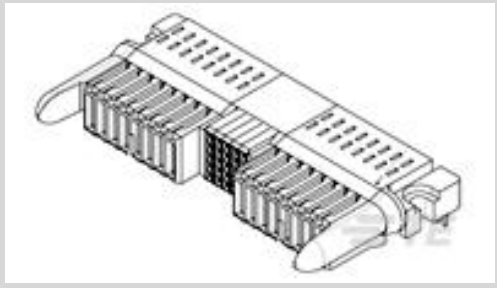

PCB Connector Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Right Angle**

Connector System: **Board-to-Board**

Number of Positions: **27**

Number of Rows: **5**

Features

Product Type Features

Mixed & Hybrid Header	Yes
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Loaded Positions	27
Mating & Unmating Configuration	Make First / Break Last
Number of Signal Positions	15
Number of Power Positions	12
Board-to-Board Configuration	Co-Planar
PCB Mount Orientation	Right Angle
Number of Positions	27
Number of Rows	5

Electrical Characteristics

--	--



Operating Voltage	60 VDC
-------------------	--------

Insulation Resistance	1000 MΩ
-----------------------	---------

Body Features

Connector Profile	Low
-------------------	-----

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Underplating Material Thickness	1.27 μm[50 μin]
---	-----------------

Contact Mating Area Plating Material Thickness	.08 – .762 μm[3.15 – 30 μin]
--	------------------------------

PCB Contact Termination Area Plating Material Thickness	.5 μm[20 μin]
---	---------------

Contact Shape & Form	Single Beam
----------------------	-------------

Contact Layout	Matrix
----------------	--------

Contact Base Material	Copper Alloy, Phosphor Bronze
-----------------------	-------------------------------

PCB Contact Termination Area Plating Material	Tin
---	-----

Contact Mating Area Plating Material	Gold (Au)
--------------------------------------	-----------

Contact Type	Receptacle
--------------	------------

Contact Current Rating (Max)	16 A
------------------------------	------

Termination Features

Termination Post & Tail Length	3.3 mm[.13 in]
--------------------------------	----------------

Termination Method to PCB	Through Hole - Press-Fit, Through Hole - Solder
---------------------------	---

Mechanical Attachment

Mating Retention	Without
------------------	---------

Mating Alignment Type	Passive Guide
-----------------------	---------------

PCB Mount Retention Type	Boardlock
--------------------------	-----------

PCB Mount Alignment Type	Boardlock
--------------------------	-----------

PCB Mount Retention	With
---------------------	------

PCB Mount Alignment	With
---------------------	------

Connector Mounting Type	Board Mount
-------------------------	-------------

Mating Alignment	With
------------------	------

Housing Features

Housing Material	LCP GF
------------------	--------

Centerline (Pitch)	2 mm, 2.75 mm[.079 in][.108 in]
--------------------	---------------------------------



Dimensions

Row-to-Row Spacing	1.5 mm, 2 mm[.06 in][.079 in]
Connector Width	36.5 mm[1.44 in]
PCB Thickness (Recommended)	1.4 – 2.62 mm[.055 – .103 in]
Connector Height	11.63 mm[.46 in]
Connector Length	55.24 mm[2.17 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	24
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

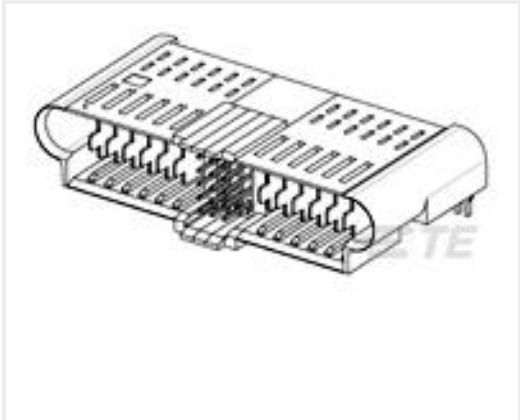

TE Part # 1-1926720-6
[AssyMinipakHDL6p15s6PRAPlugbrdlock](#)


Customers Also Bought



TE Part #2199119-3
[M.2 0.5PITCH 3.2H KEY B 15U" AU](#)



TE Part #1-406541-6
[MJ,INV,1X1,6PNL G,.140"ST,SN](#)

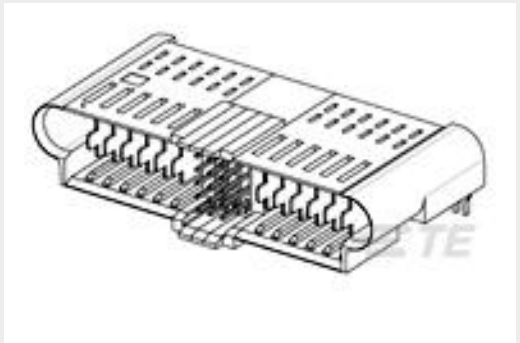

TE Part #1-1926720-6
[AssyMinipakHDL6p15s6PRAPlugbrdlock](#)



TE Part #2-2176337-7
[CRGCQ 0402 1K5 1%](#)



TE Part #1-6450160-0
[MBXL R/A RCPT 2P+24S+2P](#)

Documents

Product Drawings
[AssyMinipakHDL6p15s6PRArecptbrdlock](#)
English



CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1926721-6_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1926721-6_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1926721-6_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC01_BOARD_TO_BOARD

English

2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1

English

8-1773448-5 MINIPAK HDL Connectors Datasheet

English

8-1773448-5 MINIPAK HDL Connectors Datasheet

English

Product Specifications

Application Specification

English