




Connectors > PCB Connectors > PCB Headers & Receptacles

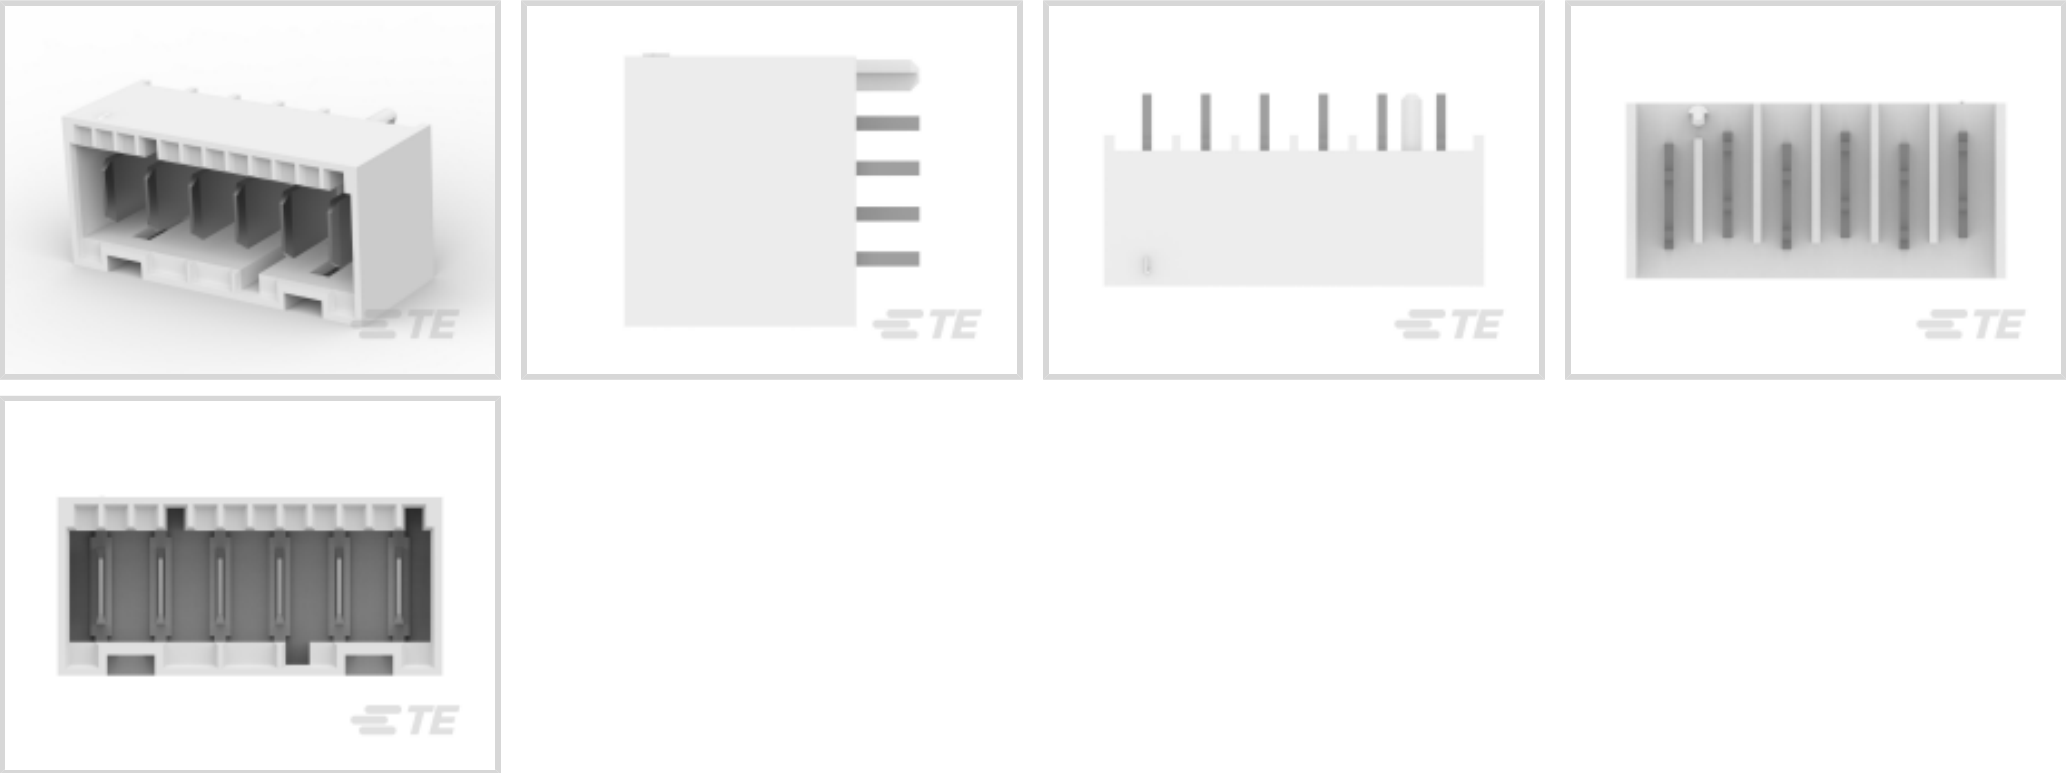

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **6**

Number of Rows: **1**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	6
Keying & Polarized Position Locations	4D
PCB Mount Orientation	Vertical
Number of Positions	6
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------



Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	2 µm[78.74 µin]
Mating Tab Width	6.3 mm[.248 in]
PCB Contact Termination Area Plating Material Thickness	2 µm[78.74 µin]
Contact Shape & Form	Rectangular
Contact Layout	Inline
Contact Base Material	Copper Alloy
Mating Tab Thickness	.8 mm[.032 in]
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Finish	Matte
Contact Mating Area Plating Material	Tin (Sn)
Contact Type	Tab
Contact Current Rating (Max)	16 A

Termination Features

Termination Post & Tail Length	3.5 mm[.13 in]
Square Termination Post & Tail Dimension	.8 mm[.032 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Retention Type	Latch
Mating Retention	With
Mating Alignment Type	Keyed
PCB Mount Alignment Type	Polarizing Pegs
PCB Mount Retention	Without
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

--	--



Housing Material	Nylon
Centerline (Pitch)	5 mm[.197 in]

Dimensions

Connector Width	14.9 mm[.58 in]
Connector Height	12.8 mm[.5 in]
Connector Length	32.3 mm[1.27 in]

Usage Conditions

Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	54
Packaging Method	Box, Tube

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent




chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

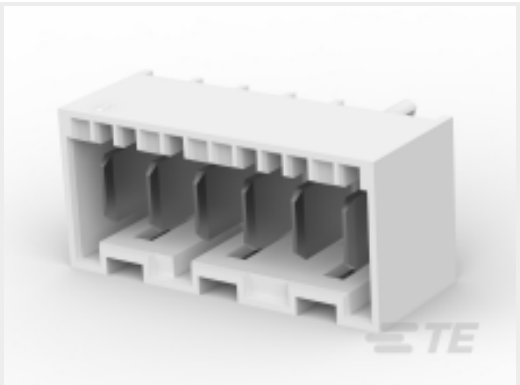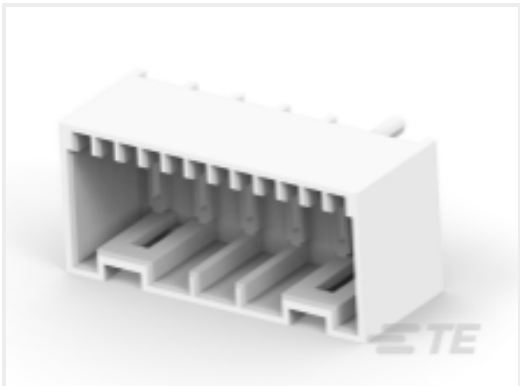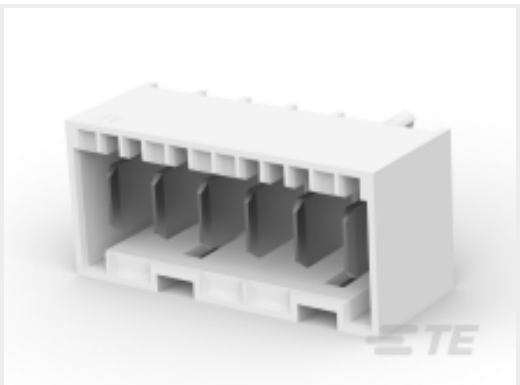 TE Part # 3-1971845-6 6P, RAST 5 Tab Header, THV	 TE Part # 5-1971845-6 6P, RAST 5 Tab Header, THV	 TE Part # 7-1971845-6 6P, RAST 5 Tab Header, THV	 TE Part # 6-1971845-6 6P, RAST 5 Tab Header, THV
 TE Part # 1-1971893-6 6P, RAST 5 Tab Header, THV	 TE Part # 4-2232043-6 6P, RAST 5 Tab Header, THV	 TE Part # 1-1971895-6 6P, RAST 5 Tab Header, THV	 TE Part # 4-1971845-6 6P, RAST 5 Tab Header, THV
 TE Part # 8-1971845-6 6P, RAST 5 Tab Header, THV	 TE Part # 1-2232043-6 6P, RAST 5 Tab Header, THV	 TE Part # 2-1971845-6 6P, RAST 5 Tab Header, THV	 TE Part # 9-1971845-6 6P, RAST 5 Tab Header, THV

Also in the Series | RAST 5 IDC Connectors

 Connector Contacts(12)	 Power Contacts(3)	 Rectangular Connector Housings(1)	 Rectangular Power Connectors(481)
---	---	--	--

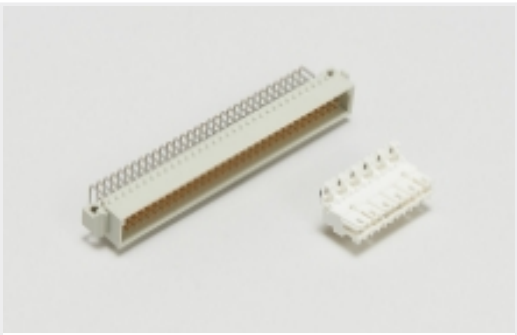

[Standard Edge Connectors\(31\)](#)



[Wire-to-Board Connector Assemblies & Housings\(197\)](#)

Customers Also Bought



TE Part #2309279-5
[05P EP SHRD HDR ASY,NO 2 PIN, WHITE](#)



TE Part #1971845-2
[2P, RAST 5 Tab Header, THV](#)



TE Part #1775317-3
[HPL.,2.5MM PITCH,V/T,SMT TYPE,3 POS](#)



TE Part #2309279-3
[03P EP SHRD HDR ASY,NO 2 PIN, WHITE](#)




TE Part #2322950-4
[4P, RAST 5 TAB HEADER SELEC, THV, OPP](#)



TE Part #2-1717011-4
[EP CONN.HDR ASSY 4/5P NATURAL \(NO.3 POST](#)



TE Part #2322950-6
[6P, RAST 5 TAB HEADER SELEC, THV, OPP](#)

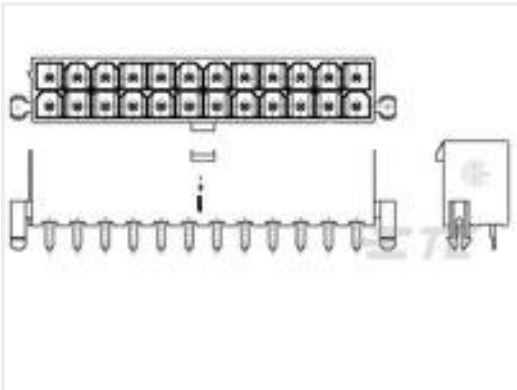

TE Part #2029265-8
[8P VAL-U-LOK VRTHDR W/PGS GW](#)



TE Part #2309279-8
[08P EP SHRD HDR ASY,NO 7 PIN, WHITE](#)



TE Part #4-1123724-3
[3.96EP HDR ASSY 3\(5\)P RED](#)

Documents

[Product Drawings](#)
[6P, RAST 5 Tab Header, THV](#)
English

[CAD Files](#)
[3D PDF](#)
3D
[Customer View Model](#)
[ENG_CVM_CVM_1-1971845-6_B_c-1-1971845-6-b.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_1-1971845-6_B_c-1-1971845-6-b.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1971845-6_B_c-1-1971845-6-b.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[RAST Connector System Catalog](#)

English

[7-1773465-5 RAST5.0 Flyer](#)

English

Product Specifications

[Product Specification](#)

English

Agency Approvals

[VDE Certificate](#)

English

[VDE Certificate](#)

English

[VDE Certificate](#)

English

[VDE Certificate](#)

English