# IHV50A4ANH V ACTIVE

#### IHV

TE Internal #: 1-2071407-1 General Purpose Contactor, DC, 1 Form A SPST-NO, 50 A Contact Rating, 12 VDC Coil Voltage, 5.5 W Coil Power, Hermetically Sealed, 85 °C, IHV

#### View on TE.com >





Relay & Contactor Type: General Purpose Contactor

Current Type: DC

Contact Arrangement: 1 Form A SPST-NO

Contact Current Rating: 50 A

Coil Voltage Rating: 12 VDC

### Features

connectivity

### Product Type Features

Relay & Contactor Type	General Purpose Contactor
Configuration Features	
Auxiliary Switch Contact Arrangement	Without
Contact Number of Poles	3
Contact Arrangement	1 Form A SPST-NO
Electrical Characteristics	
Coil Resistance	26 Ω
Contact Switching Voltage (Max)	900 VDC
Contact Current Rating	50 A
Coil Voltage Rating	12 VDC
Coil Power Rating DC	5.5 W
Body Features	
Enclosure Type	Hermetically Sealed

#### IHV50A4ANH

General Purpose Contactor, DC, 1 Form A SPST-NO, 50 A Contact Rating, 12 VDC Coil Voltage, 5.5 W Coil Power, Hermetically Sealed, 85 °C, IHV



# **Contact Features** Contact Material Copper **Termination Features** Main Termination & Connection Type M5 Female Coil Termination & Connection Type Connector **Mechanical Attachment** Torque (Main) 30 – 40 in-lbs Mounting Plate, Screw Product Mounting Feature Type Dimensions Product Width 39.5 mm Product Length 53.9 mm Product Height 58 mm Usage Conditions Environmental Ambient Temperature (Max) 85 °C **Operation/Application** Current Type DC

### Packaging Features



Packaging Method

Box

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

**&** For support call+1 800 522 6752

04/13/2025 06:21AM | Page 2


### IHV50A4ANH

General Purpose Contactor, DC, 1 Form A SPST-NO, 50 A Contact Rating, 12 VDC Coil Voltage, 5.5 W Coil Power, Hermetically Sealed, 85 °C, IHV




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

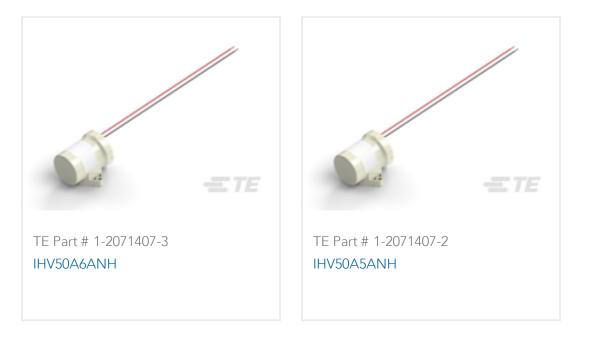

# Also in the Series | IHV

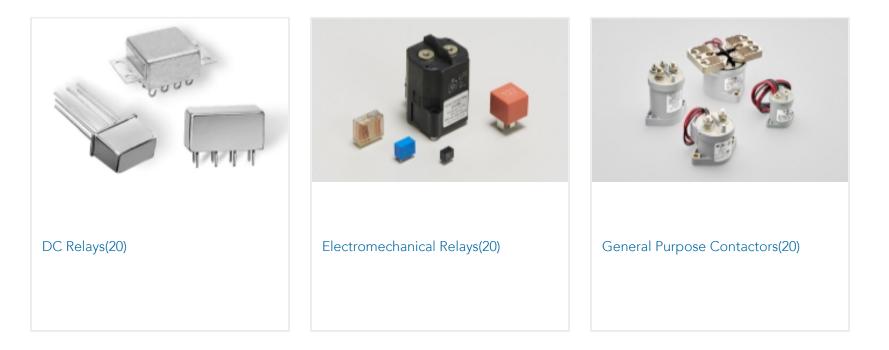

# Customers Also Bought



## Documents

#### **CAD** Files

3D PDF

3D

#### IHV50A4ANH

General Purpose Contactor, DC, 1 Form A SPST-NO, 50 A Contact Rating, 12 VDC Coil Voltage, 5.5 W Coil Power, Hermetically Sealed, 85 °C, IHV



Customer View Model

ENG\_CVM\_CVM\_1-2071407-1\_A3.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-2071407-1\_A3.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-2071407-1\_A3.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages IHV50\_EN

English

IHV50\_CN

English

Agency Approvals CQC\_CERT\_2017010304992699\_C1

English