1-2308265-9 <

Rail D-Sub Backshells TE Internal #: 1-2308265-9 Quick Lock Pins, Rail D-Sub Backshells View on TE.com >



Connectors > Connector Accessories > Connector Hardware > Quick Lock Pins for D-Sub with Threaded Inserts



Connector Hardware Accessory Type: Quick Lock Pins

Operating Temperature (Max): 90 °C [194 °F]

Operating Temperature Range: -40 – 90 °C [-40 – 194 °F]

Hardware Accessory Function: Latching, Locking & Retention

All Quick Lock Pins for D-Sub with Threaded Inserts (10)

Features

Product Type Features

Connector Hardware Accessory Type	Quick Lock Pins			
Hardware Accessory Function	Latching, Locking & Retention			
Mechanical Attachment				
Thread Size	None			
Usage Conditions				
Operating Temperature (Max)	90 °C[194 °F]			
Operating Temperature Range	-40 – 90 °C[-40 – 194 °F]			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant with Exemptions			
	Not Yet Reviewed			
EU ELV Directive 2000/53/EC	Not Yet Reviewed			
EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Not Yet Reviewed Restricted Materials Above Threshold			

Quick Lock Pins, Rail D-Sub Backshells



Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (3.5% in Component Part)

Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts






Also in the Series | Rail D-Sub Backshells

C For support call+1 800 522 6752

Quick Lock Pins, Rail D-Sub Backshells



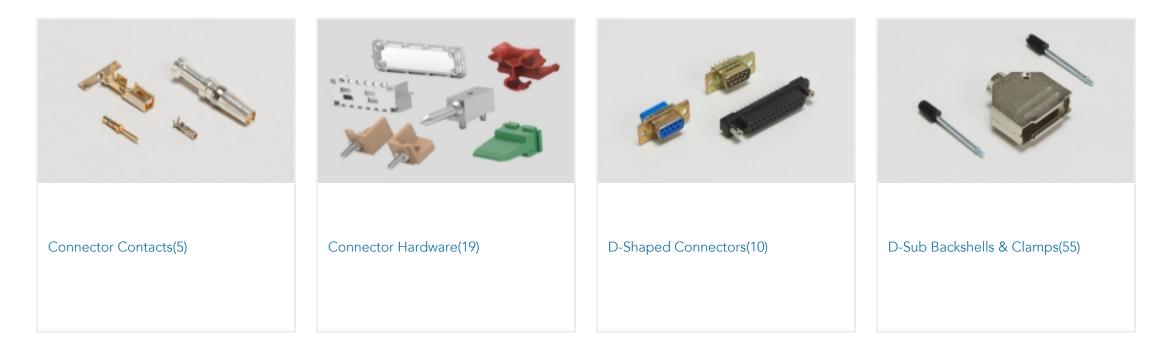



Customers Also Bought



TE Part #1-2308272-3	TE Part #52955-1	TE Part #152873	TE Part #1-794613-1
CABLE CLAMP3 (CASE RAW)	TERMINAL,PG SPR SPD 16-14 6	14-12 PIDG NYLON RT NO 8 WHITE	PIN CONT 26-30 15 GOLD L/P
	= TE		ITUH BER DER
TE Part #4-6609106-8	TE Part #1-794611-2	TE Part #NB11014001	TE Part #2-2176339-8
PS0S0DH6B=C1290	MICRO MNL RPT CNT,LS PC,30AU L	ATUM-4/1-0-SP	CRGCQ 0603 1K8 1%



Documents

1-2308265-9

Quick Lock Pins, Rail D-Sub Backshells



Product Drawings QL SET FOR VARIANT B 9

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2308265-9_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2308265-9_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2308265-9_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Rail D-Sub Backshells Flyer

English