1-2308298-6 - ACTIVE

Rail D-Sub Backshells TE Internal #: 1-2308298-6 Quick Lock Pins, Rail D-Sub Backshells View on TE.com >



Connectors > Connector Accessories > Connector Hardware > Double Sided QLPIN Bulkhead



Connector Hardware Accessory Type: Quick Lock Pins

Operating Temperature (Max): 90 °C [ 194 °F ]

Operating Temperature Range: -40 – 90 °C [-40 – 194 °F]

Hardware Accessory Function: Latching, Locking & Retention

### All Double Sided QLPIN Bulkhead (6)

## Features

### **Product Type Features**

Connector Hardware Accessory Type

Hardware Accessory Function

Quick Lock Pins

Latching, Locking & Retention

## **Mechanical Attachment**

Thread Size	None
Usage Conditions	
Operating Temperature (Max)	90 °C[194 °F]
Operating Temperature Range	-40 – 90 °C[-40 – 194 °F]
Packaging Features	
Packaging Method	Box
Packaging Quantity	500
Product Compliance	
For compliance documentation, visit the product page on TE.com>	Compliant with Evenentions
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions
For compliance documentation, visit the product page on TE.com>	Compliant with Exemptions Compliant with Exemptions
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

#### Quick Lock Pins, Rail D-Sub Backshells



Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (3.5% in Component Part)

Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

#### Solder Process Capability

Not reviewed for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



## Also in the Series | Rail D-Sub Backshells

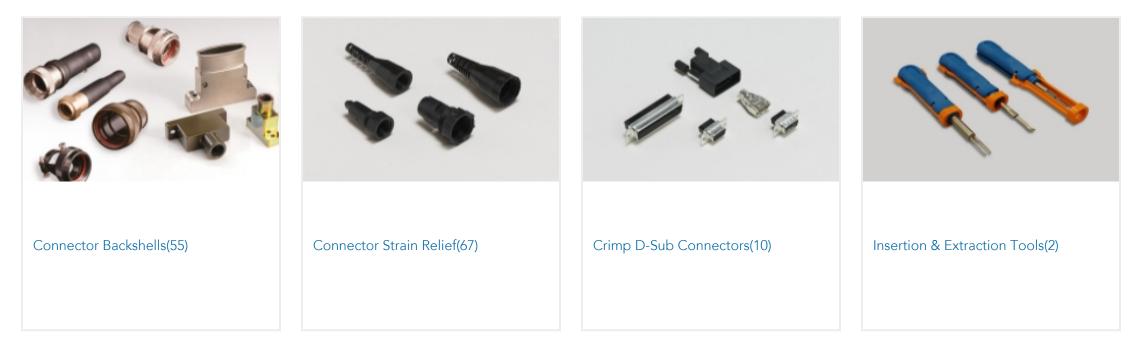

Quick Lock Pins, Rail D-Sub Backshells





# Customers Also Bought



## Documents

**Product Drawings** QL-SET FOR VAR. E LATCH PIN WITH GUIDE 6

English

Datasheets & Catalog Pages Rail D-Sub Backshells Flyer

English