1-2355626-1 ACTIVE

DDR5 DIMM

TE Internal #: 1-2355626-1

Double Data Rate (DDR) 5, Board-to-Component, 288 Position, Surface Mount, Vertical Module Orientation, DDR5 DIMM, DIMM

Sockets

View on TE.com >



Connectors > Socket Connectors > Memory Sockets > DIMM Sockets



DRAM Type: Double Data Rate (DDR) 5

Connector System: **Board-to-Component**

Number of Positions: 288

Termination Method to PCB: Surface Mount

Module Orientation: Vertical

Features

Product Type Features

1 Toduct Type Leatures	
Connector & Contact Terminates To	Printed Circuit Board
DRAM Type	Double Data Rate (DDR) 5
Connector System	Board-to-Component
Configuration Features	
Number of Keys	1
Number of Bays	2
Number of Rows	2
Number of Positions	288
Module Orientation	Vertical
Electrical Characteristics	
DRAM Voltage	1.1 V
Body Features	
Latch Color	Black

High Temperature Nylon

Latch Material



PCB Retention Feature Material	Stainless Steel
Connector Profile	Standard
Ejector Material Color	Black
Module Key Type	DRAM
Ejector Location	Both Ends
Ejector Material	High Temperature Nylon
Ejector Type	Rotary

Contact Features

Contact Underplating Material	Nickel
Socket Style	DIMM
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
PCB Contact Termination Area Plating Material Thickness	3 μm[120 μin]
Contact Mating Area Plating Material	Gold (Au)
Memory Socket Type	Memory Card
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	1.5 A

Termination Features

Insertion Style	Direct Insert
Termination Post & Tail Length	.89 mm[.035 in]
Termination Method to PCB	Surface Mount

Mechanical Attachment

Connector Mounting Type	Board Mount
Mount Angle	Vertical
PCB Mount Retention Type	Tab
Mating Alignment Type	1 Key
Mating Alignment	With
PCB Mount Alignment Type	None

Housing Features

Housing Color	Black
Housing Material	High Temperature Nylon
Centerline (Pitch)	.85 mm[.033 in]



Dimensions

Profile Height from PCB	21.3 mm[.083 in]
Row-to-Row Spacing	3 mm[.118 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	High Speed Data
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	640

Box & Tray

Product Compliance

Packaging Method

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach



Compatible Parts



Also in the Series | DDR5 DIMM

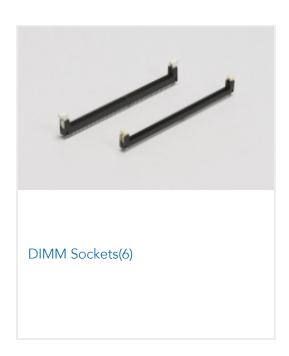

Customers Also Bought



Documents

Product Drawings

DDR5 DIMM BLACK HSG AND BLACK LATCH

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-2355626-1_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1-2355626-1_A.3d_igs.zip

English

3D PDF

Double Data Rate (DDR) 5, Board-to-Component, 288 Position, Surface Mount, Vertical Module Orientation, DDR5 DIMM, DIMM Sockets



3D

Customer View Model

ENG_CVM_CVM_1-2355626-1_A.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English