




Connectors > Contacts > Connector Contacts

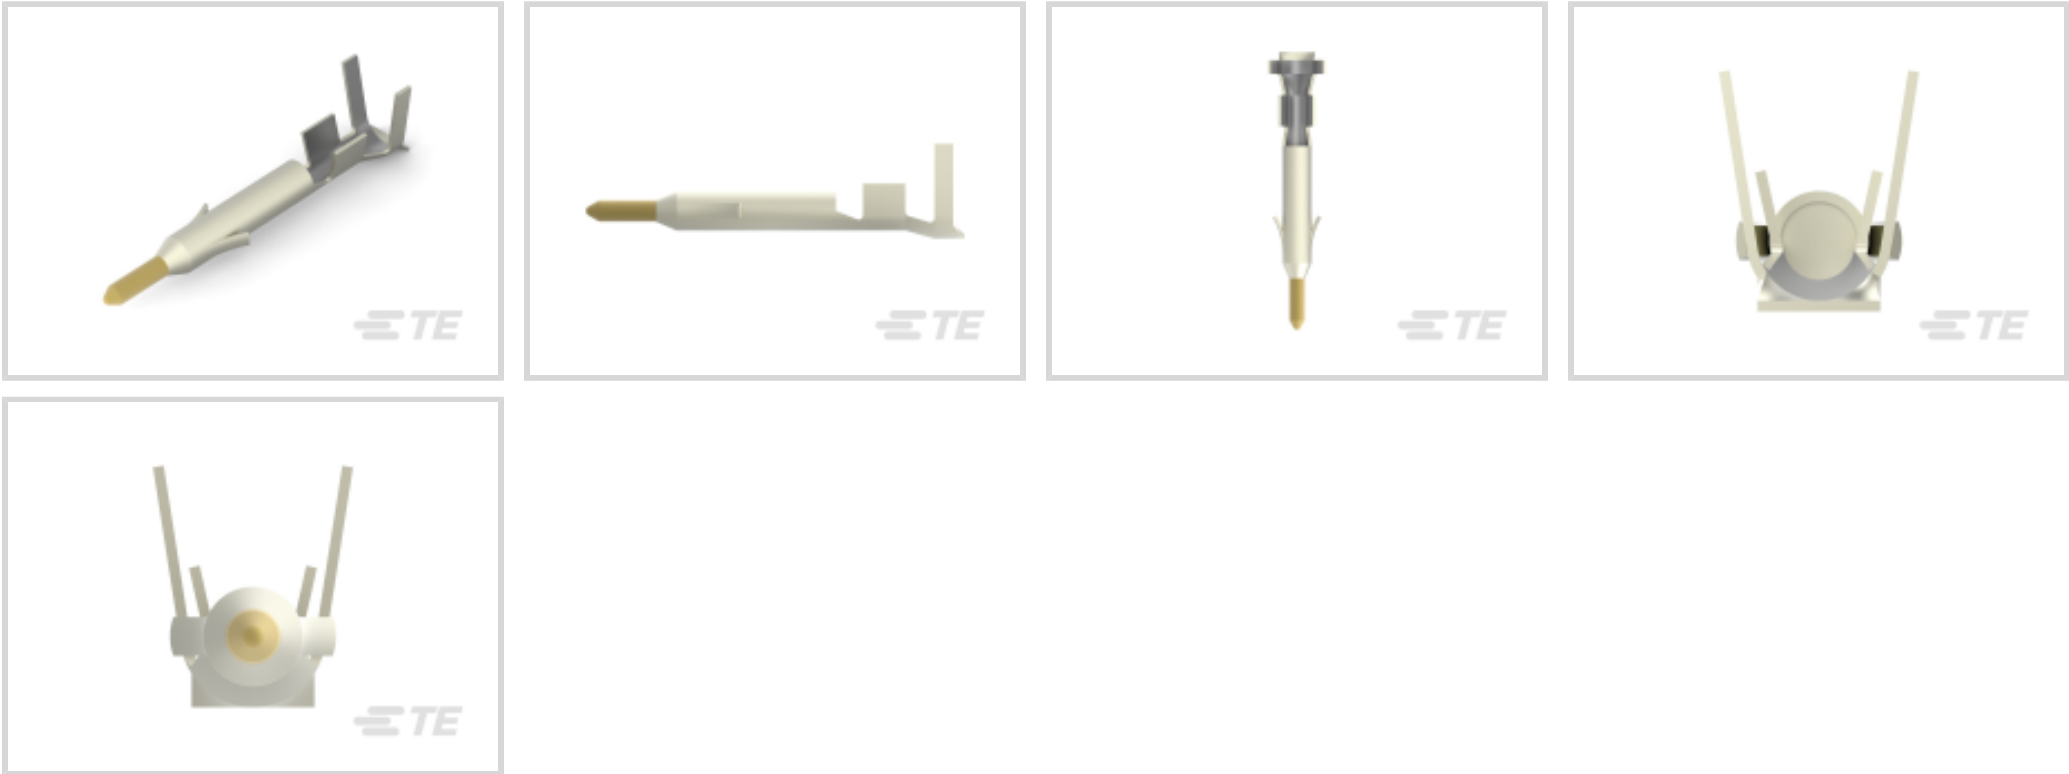

Contact Type: **Pin**
Contact Mating Area Plating Material: **Gold (Au)**
Wire Contact Termination Area Plating Material: **Tin**
Operating Voltage: **600 VDC**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Contact Underplating Material	Nickel
Contact Orientation	Straight
Mating Pin Diameter	1 mm[.039 in]
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Wire Contact Termination Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	2.54 µm[100 µin]
Contact Type	Pin
Contact Mating Area Plating Material	Gold (Au)
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With



Contact Base Material	Brass
Contact Current Rating (Max)	9.5 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Compatible Insulation Diameter Range	1.5 – 2.39 mm[.059 – .094 in]
Wire Size	.3 – .9 mm²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

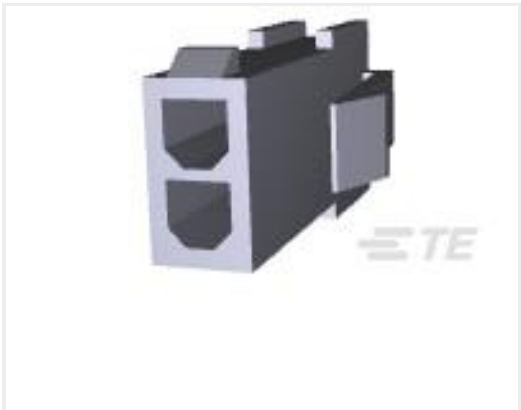 TE Part # 1-172163-2 15 POS TR MINI UNIV	 TE Part # 1-172328-5 2 POS SR MINI UNIV	 TE Part # 1-172337-4 MINI U-M-N-L PLUG 3P YELLOW	 TE Part # 172331-1 MINI UNIVERSAL MATE-N-LOK CAP HOUSING 6P
 TE Part # 1-172160-9 MINI UNIVERSAL M-N-L CAP 6P	 TE Part # 1-172168-9 MINI UNIVERSAL M-N-L PLUG 6P	 TE Part # 1-172162-2 12 POS TR MINI UNIV	 TE Part # 1-172165-2 2CIR MINI U-M-N-L PLUG RED
 TE Part # 1445390-1 PLUG,8-4,SM INS,STD KEY	 TE Part # 1445510-3 REC,8-3,FRE HNG,LG INS,STD KEY	 TE Part # 1445822-1 REC,11-7,FLNG MT,SM INS,STD KE	 TE Part # 172156-1 1 CIR UNIV M-N-L CAP



TE Part # 172169-1
9 CIR UNIV M-N-L PLUG



TE Part # 174670-1
KEYING PLUG MINI U-M-N-L



TE Part # 1445825-1
RECPT,11-9,FREE HNG,STD KEY



TE Part # 1445820-1
PLUG,11-5,SM INS,STD KEY



TE Part # 1445421-1
REC,8-4,FLNG MT,SM INS,STD KEY



TE Part # 1445538-1
REC,8-2,FLNG MT,SM INS,STD KEY



TE Part # 1445829-1
REC,11-5,FRE HNG,SM INS,STD KE



TE Part # 1-172233-9
2P MINI UNIV FREE HANG BLACK

Also in the Series | Mini-Universal MATE-N-LOK



Connector Caps & Covers(2)



Connector Contacts(89)



Connector Hardware(4)




Power Contacts(89)



Rectangular Connector Housings(104)



Rectangular Power Connectors(196)

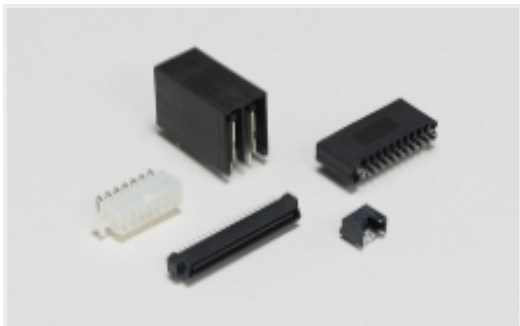

Standard Rectangular Connectors(104)

Customers Also Bought




TE Part #170369-1
LOW PROFILE EI CONN LP



TE Part #172142-3
EIS LOW PROFILE HSG 3P NATURAL



TE Part #CS9494-000
SEB-E

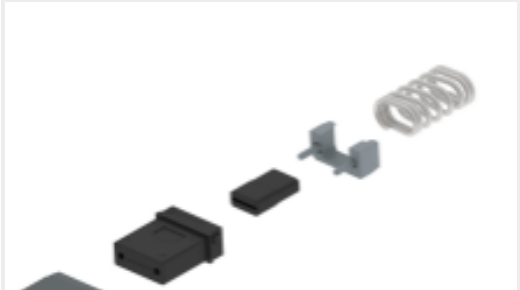

TE Part #2828413-1
MT FERRULE KIT, MM, 12-F, W/O PINS, RCPT






TE Part #794758-1
MINI UMNL WIRE SEAL,18-26AWG



TE Part #1-770988-1
MINI UMNL SOK 22-18AWG LP LF

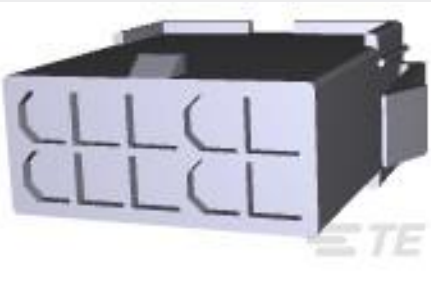

TE Part #794942-1
10P MINI UMNL CAP HSG



TE Part #175778-8
CT CRIMP REC HSG 8P NATURAL



TE Part #YDTS32T19NV0010000
CAP ASSEMBLY

TE Part #MC307E2-C-23-8PN
JAMNUT REC.ASSY.PIN MC3/2

Documents

Product Drawings

MINI UMNL PIN 22-18 AWG AU LP

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-770987-0_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-770987-0_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-770987-0_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications Continued

English

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English



Instruction Sheets

Instruction Sheet (U.S.)

English