


AMPLIVAR

TE Internal #: 1217990-2
Thru Splice, 12 – 9 AWG, 3 – 7 mm² Wire, 3 Splice Capacity,
Serrated, 6000 – 14000 CMA, Brass, 5 Serration, 6.78 mm [.267 in]
Length, Strip, AMPLIVAR

[View on TE.com >](#)



Terminals & Splices > Splices

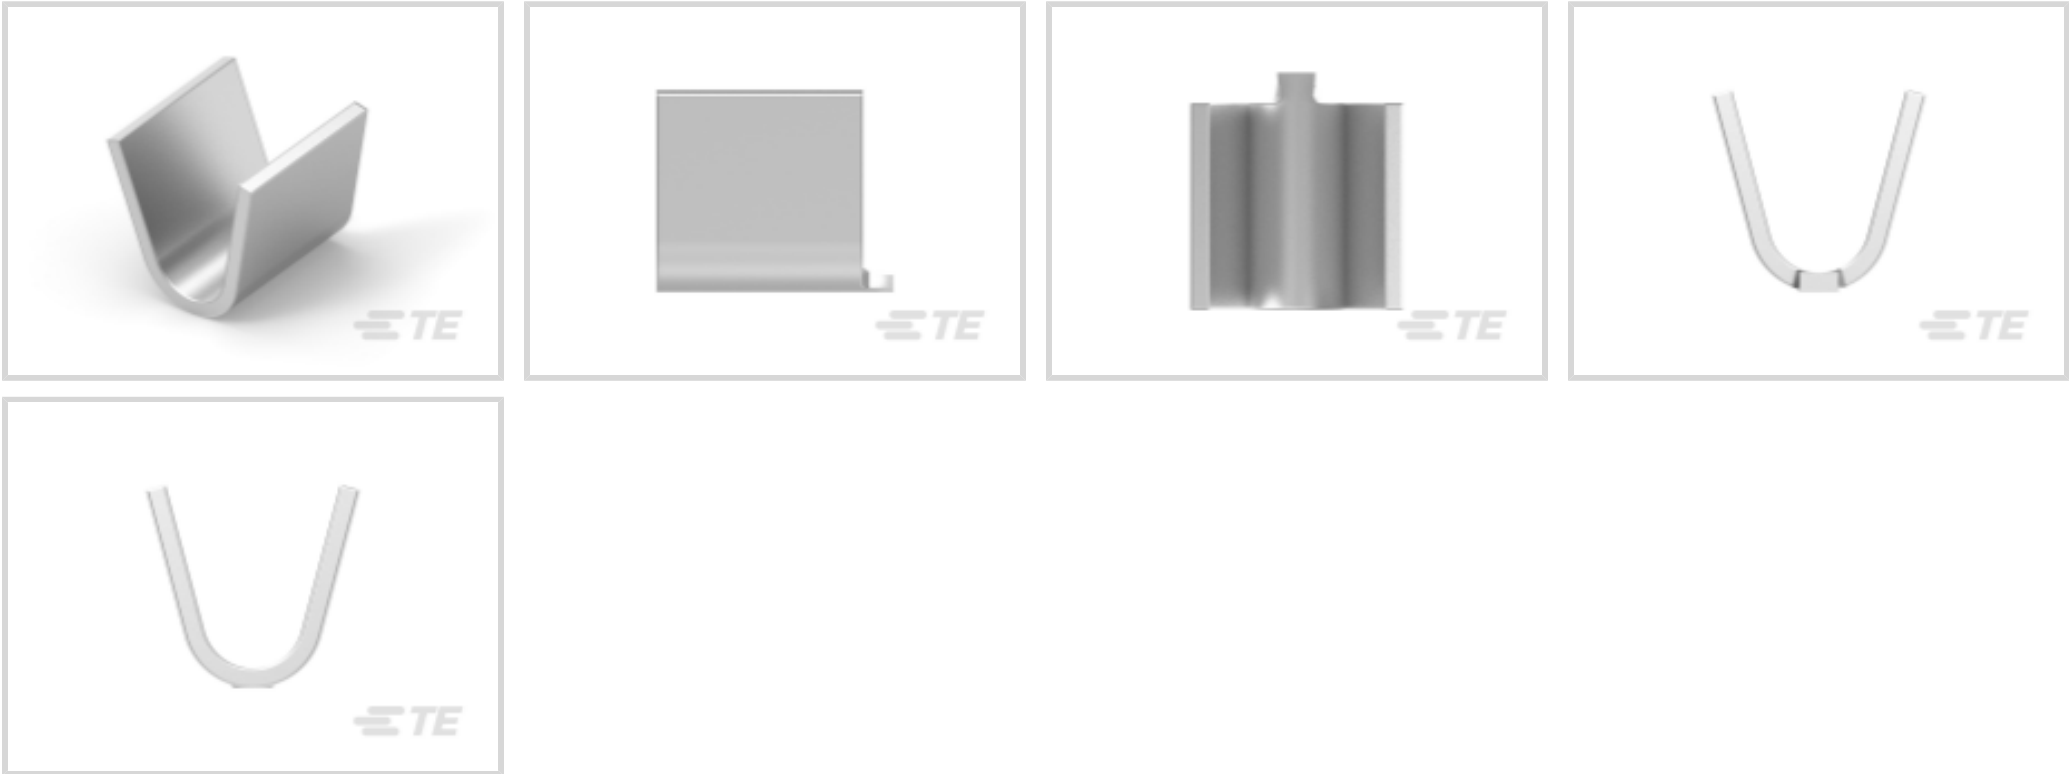

Splice Type: **Thru Splice**
Wire Size: **3 – 7 mm²**
Sealable: **No**
Splice Capacity: **3**

Features

Product Type Features

Splice Type	Thru Splice
Sealable	No
Compatible With Discrete Wire Type	Magnet Wire, Solid

Configuration Features

Strip Orientation	Side Feed
Splice Capacity	3
Number of Serrations	5

Electrical Characteristics

Operating Voltage	250 V
-------------------	-------

Body Features

Product Weight	.473 g
Splice Features	Serrated

Contact Features

Terminal Plating Material	Tin
---------------------------	-----



Contact Base Material	Brass
Barrel Type	Open

Termination Features

Crimp Width	4.57 mm[.18 in]
-------------	-----------------

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	6000 – 14000 CMA
Barrel Inside Diameter	3.3 mm[.13 in]
Terminal Material Thickness	.64 mm[.025 in]
Product Length	6.78 mm[.267 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-65 – 150 °C[-85 – 302 °F]

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	3500
Packaging Method	Strip

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 63562-1
[SPLICE 10400-22900 030TPBR](#)



TE Part # 2266950-2
[OCEAN-2.0-APPLICATOR-S-180F-SSA](#)



TE Part # 2266950-1
[OCEAN-2.0-APPLICATOR-S-180F-SSM](#)

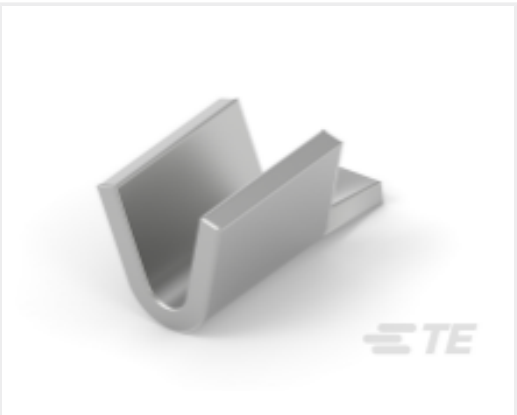


TE Part # 63621-2
[SPLICE S-MINI/AMVAR 0098TPCUBR](#)




TE Part # 7-2266950-7
[OCEAN_2.0_SPARE_PART_KIT-180F](#)

Also in the Series | **AMPLIVAR**

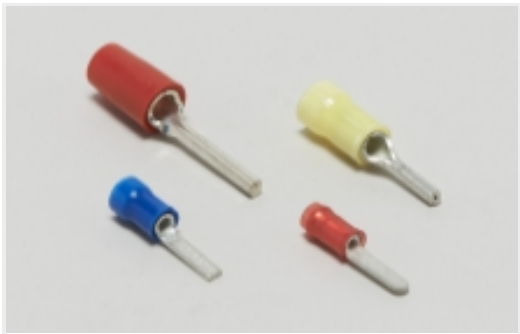

[Crimp Wire Pins, Tabs & Ferrules\(4\)](#)

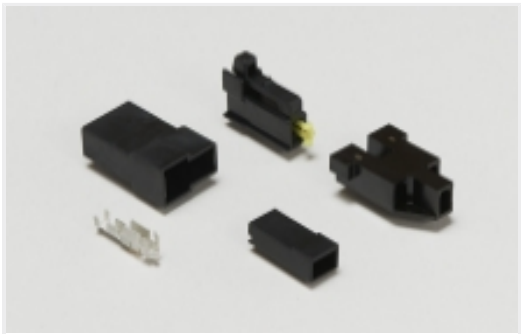

[Magnet Wire Terminals\(4\)](#)



[PCB Terminals\(1\)](#)



[Quick Disconnects\(40\)](#)



Ring Terminals(28)




Splices(71)


Customers Also Bought




TE Part #4-794619-4
14P MICRO MNL ASSY,R/A,HDR LF

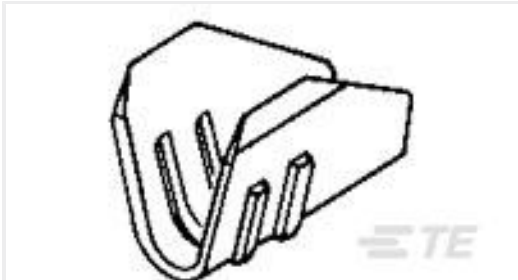

TE Part #63431-1
MINI AMVAR SPLICE.0126TPBR

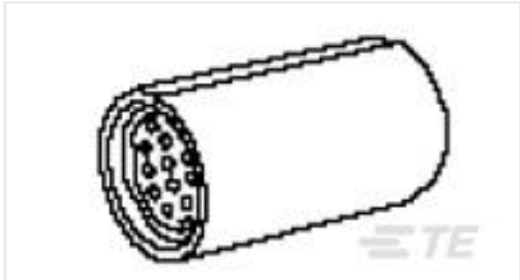

TE Part #52792
SPLICE,COPALUM PARA 12-10

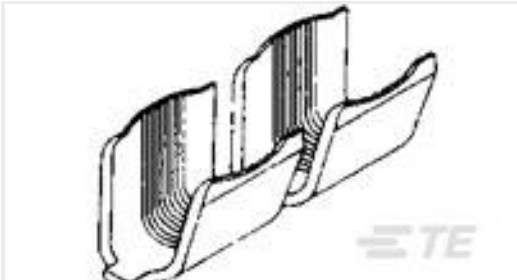


TE Part #41904
SPLC AMVAR 7000-13000 TPBR



TE Part #66332-3
III+ PIN,24-20,15AU/FL,STRIP




TE Part #1SNG626138R0000
EP-SGL-NPT1-BL-A

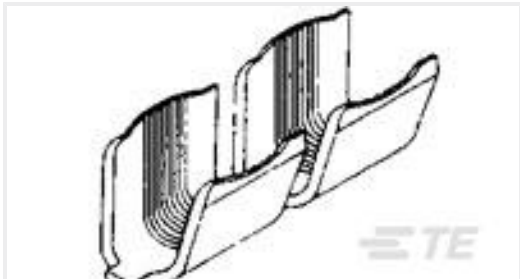


TE Part #42779-2
SPLICE AMPLIVAR 3000-7000



TE Part #170152-4
AMP SPLICE

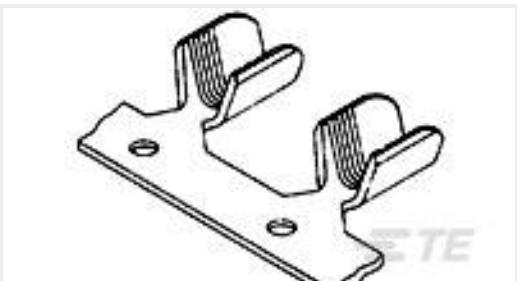

TE Part #63621-2
SPLICE S-MINI/AMVAR 0098TPCUBR

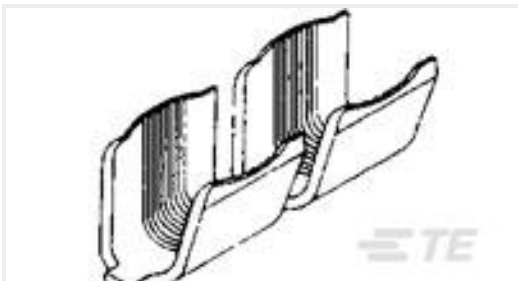

TE Part #42778-2
SPLICE AMPLIVAR 600-3000 CMA

Documents

Product Drawings

AMVAR SPLC 6000-14000 025TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1217990-2_D.2d_dxf.zip

1217990-2

Thru Splice, 12 – 9 AWG, 3 – 7 mm² Wire, 3 Splice Capacity, Serrated, 6000 – 14000 CMA, Brass, 5 Serration, 6.78 mm [.267 in] Length, Strip, AMPLIVAR



English

Customer View Model

[ENG_CVM_CVM_1217990-2_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1217990-2_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Magnet Wire Terminals & Splices](#)

English

Product Specifications

[Application Specification](#)

English

[AMPLIVAR 5 Serration Thru Splice](#)

English