
1241001-1 <

TE Internal #: 1241001-1 Ferrule, 18 AWG, .75 mm² Wire, 1624 CMA, Closed Barrel, Tin Plating, 14.5 mm [.571 in] Length, Strip, Discrete Wire, Stranded Wire, Fully Insulated

View on TE.com >



Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

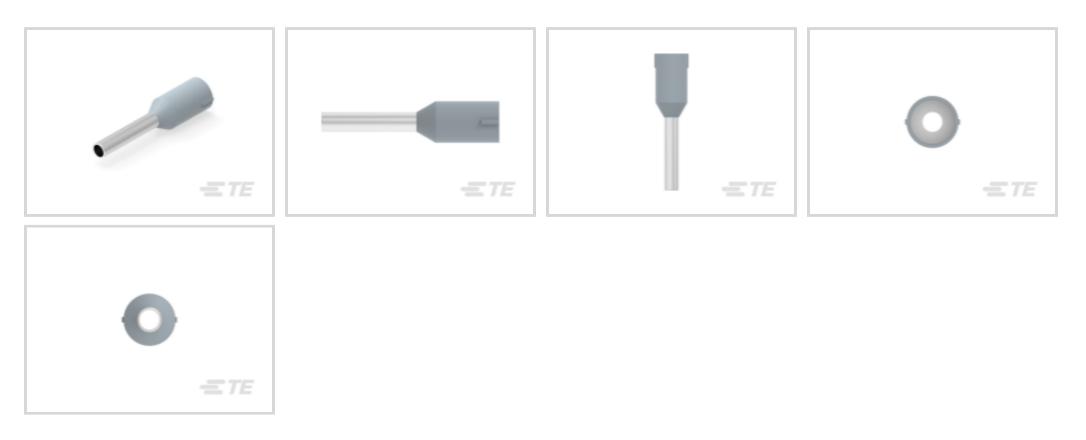

Crimp Wire Terminal Type: Ferrule

Compatible Insulation Diameter Range: 2.6 mm [.1 in]

Wire Size: 1624 CMA

Features

Product Type Features

Sealable

Compatible With Discrete Wire Type	Stranded
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Sleeve Material	PP/E-Cu
Primary Product Color	Gray
Contact Features	
Crimp Wire Terminal Type	Ferrule
Barrel Type	Closed
Terminal Plating Material	Tin
Terminal Orientation	Straight
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	

C For support call+1 800 522 6752

1241001-1

Ferrule, 18 AWG, .75 mm² Wire, 1624 CMA, Closed Barrel, Tin Plating, 14.5 mm [.571 in] Length, Strip, Discrete Wire, Stranded Wire, Fully Insulated



Strip Length	10 mm[.394 in]
Compatible Insulation Diameter Range	2.6 mm[.1 in]
Wire Size	1624 CMA
Barrel Inside Diameter	2.9 mm[.11 in]
Terminal Material Thickness	.15 mm[.006 in]
Overall Product Length	14.5 mm[.571 in]
Usage Conditions	
Insulation Option	Fully Insulated
Packaging Features	
Packaging Quantity	1000
Packaging Method	Strip
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

1241001-1

Ferrule, 18 AWG, .75 mm² Wire, 1624 CMA, Closed Barrel, Tin Plating, 14.5 mm [.571 in] Length, Strip, Discrete Wire, Stranded Wire, Fully Insulated






Customers Also Bought



TE Part #L9000279-01TE Part #647676-2TE Part #647676-2TE Part #966066-2TE Part #966067-2SMA Jack 50 Ohm .062 PCB Edge
Mount3.96 EP HDR ASSY 2P R/AFER,WIRE,PL SLV,.25/24,L8,LIGHT-
BLUE,LPFER,WIRE,PL SLV,.50/20,L8,WHITE,LP

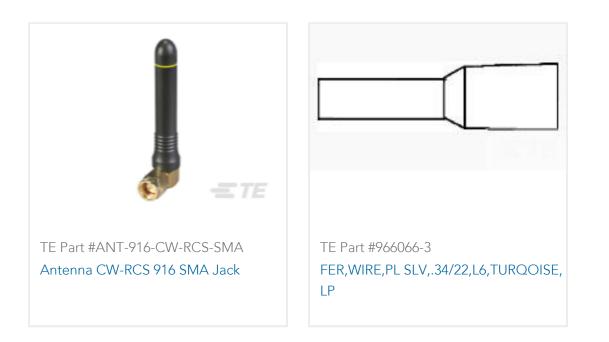

Documents

Product Drawings ADERENDH0,75M GRAU

English

CAD Files

3D PDF

English

1241001-1

Ferrule, 18 AWG, .75 mm² Wire, 1624 CMA, Closed Barrel, Tin Plating, 14.5 mm [.571 in] Length, Strip, Discrete Wire, Stranded Wire, Fully Insulated



Customer View Model

ENG_CVM_1241001-1_A2.2d_dxf.zip

English

Customer View Model

ENG_CVM_1241001-1_A2.3d_igs.zip

English

Customer View Model

ENG_CVM_1241001-1_A2.3d_stp.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_1241001-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1241001-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1241001-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages BUCHANAN TERMINAL BLOCKS CATALOG - EUROSTYLE TERMINAL BLOCKS

English

Wire Ferrules

English

WIRE END FERRULES

English