




Connectors > PCB Connectors > PCB Headers & Receptacles

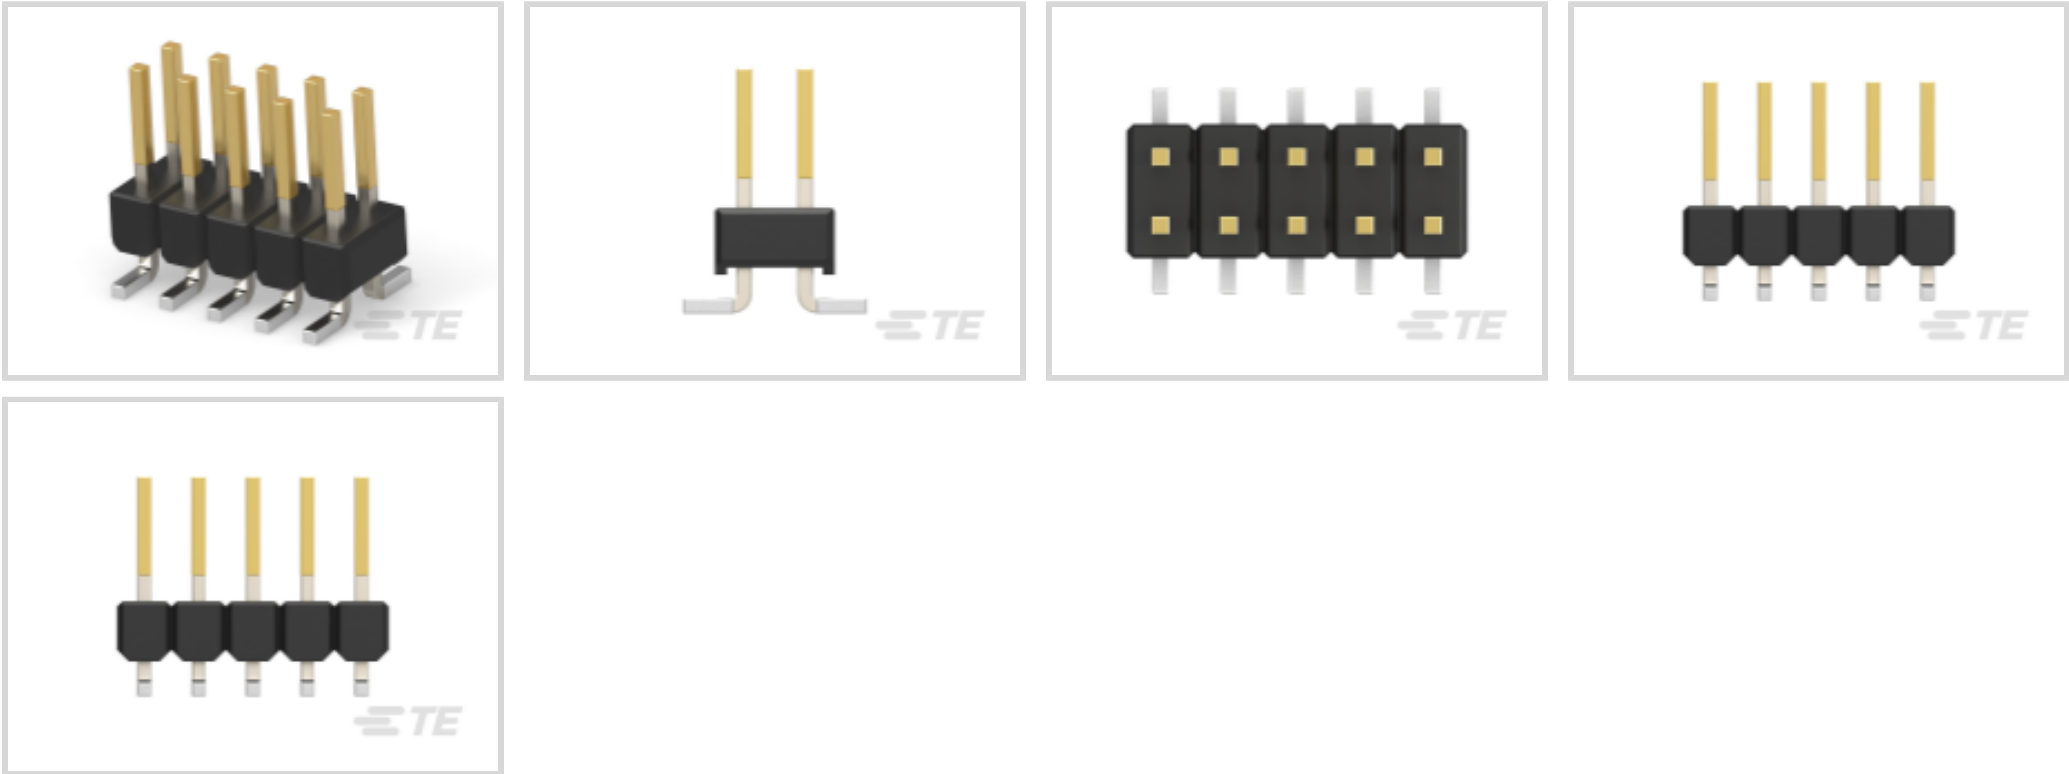

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **10**

Number of Rows: **2**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Breakaway
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Connector Contact Load Condition	Fully Loaded
Board-to-Board Configuration	Parallel
PCB Mount Orientation	Vertical
Number of Positions	10
Number of Rows	2

Body Features

Primary Product Color	Black
-----------------------	-------



Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.8 µm[31.5 µin]
Mating Square Post Dimension	.64 mm[.025 in]
Contact Shape & Form	Square
PCB Contact Termination Area Plating Material Thickness	3 µm[118 µin]
Contact Layout	Matrix
Contact Mating Area Length	5.8 mm[.228 in]
Contact Base Material	Copper Zinc, Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Pin
Contact Current Rating (Max)	5 A

Termination Features

Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Method to PCB	Surface Mount

Mechanical Attachment

PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	Without

Housing Features

Housing Material	PCT GF
Centerline (Pitch)	2.54 mm[.1 in]

Dimensions

Row-to-Row Spacing	2.54 mm[.1 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Housing Temperature Rating	Standard
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]

Operation/Application



Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	350
Packaging Method	Reel

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

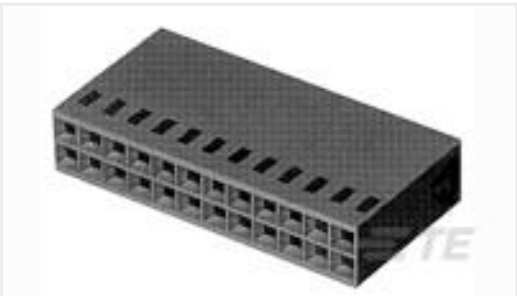


TE Part # 925367-5
MOD 4 REC.HSG 2X05P

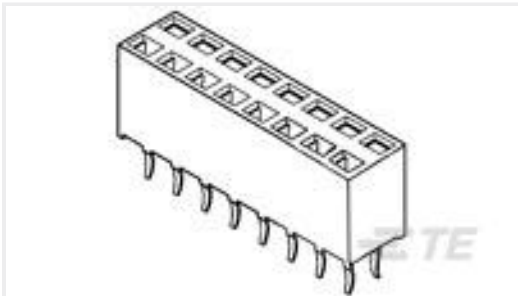


TE Part # 215309-5
2X5P HV100 REC CON. TE, 8.5MM

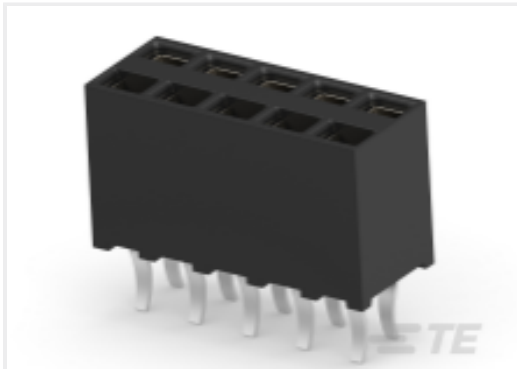


TE Part # 215307-5
2X5P HV100 REC CON. TE, 7.0MM

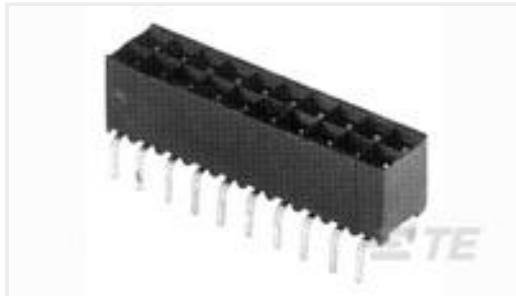

TE Part # 829264-5
2X 5P HV100 REC CON.B/TE, 6.2,NO KINK

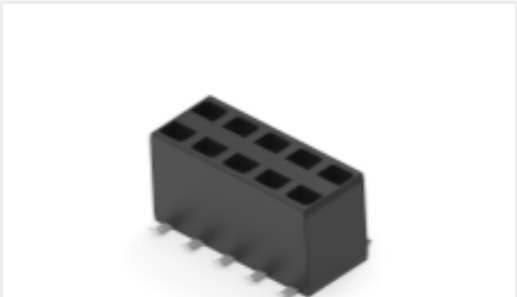

TE Part # 969973-5
2x5P HV100 REC. CON, SMD, GOLD, BLISTER

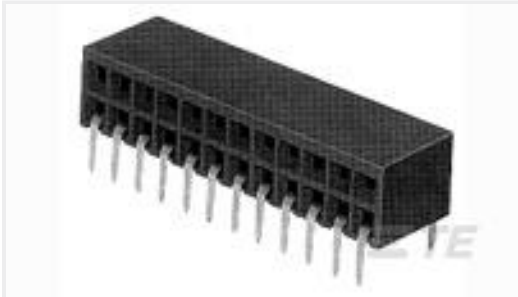


TE Part # 216604-5
2X 5P HV190FEDERLEI

Also in the Series | AMPMODU Headers



Automotive Headers(1)

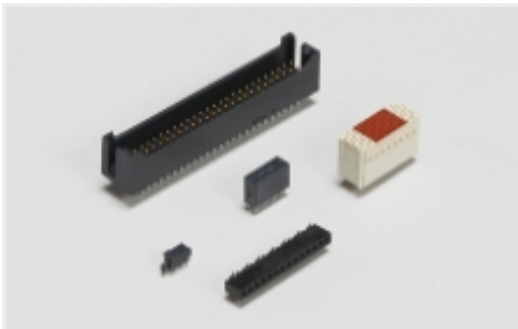


Board-to-Board Headers & Receptacles(1576)



Connector Contacts(47)



Connector Hardware(1)

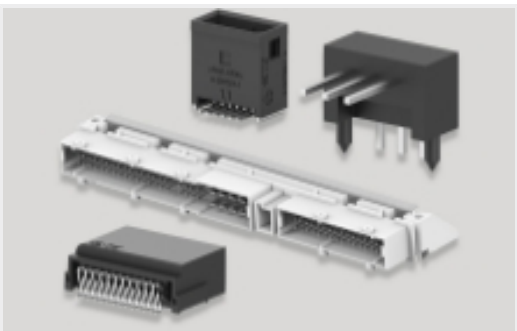


PCB Headers & Receptacles(1621)



Rectangular Power Connectors(43)



Wire-to-Board Connector Assemblies & Housings(5)

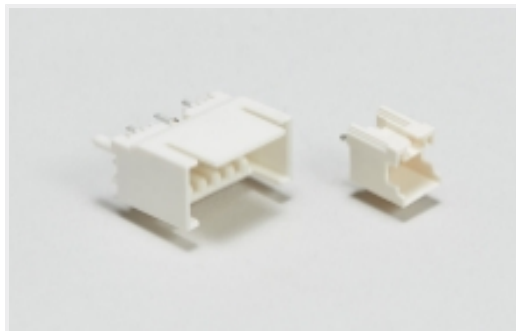


Wire-to-Board Headers & Receptacles (114)

Customers Also Bought




TE Part #1-826925-2
12P MOD2 STIFT LEI

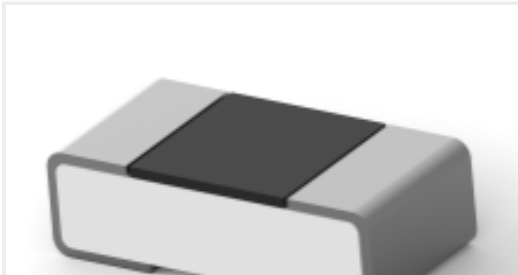

TE Part #6-2176363-8
RQ 0402 2K15 0.1% 10PPM 5K RL



TE Part #8-2176362-1
RQ 0402 274R 0.1% 10PPM 5K RL

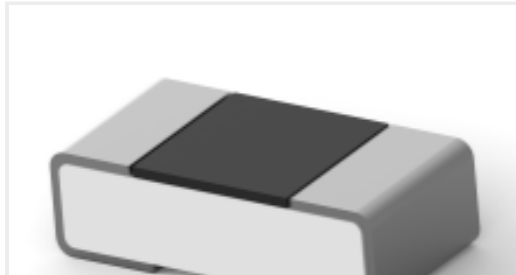

TE Part #2-2176363-7
RQ 0402 806R 0.1% 10PPM 5K RL



TE Part #8-2176363-9
[RQ 0402 3K57 0.1% 10PPM 5K RL](#)

TE Part #8-215460-8
[MICRO-MATCH FSID P](#)

TE Part #1879129-3
[RN 0402 1K21 0.1% 10PPM 5K RL](#)

TE Part #2176363-4
[RQ 0402 464R 0.1% 10PPM 5K RL](#)

TE Part #5822134-3
[72 ME .050 L/P M/L PB-FREE](#)

TE Part #5-147292-3
[04 MODII HDR DR SFMT B/A T&R](#)

Documents

Product Drawings

[2x5P MOD II BREAK AWAY HDR,SMD, BLISTER](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1241050-5_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1241050-5_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1241050-5_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.