


PIDG

TE Internal #: 130205 Closed Ring Tongue Terminal, 12 – 10 AWG, M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PIDG

View on TE.com >

Terminals & Splices > Ring Terminals

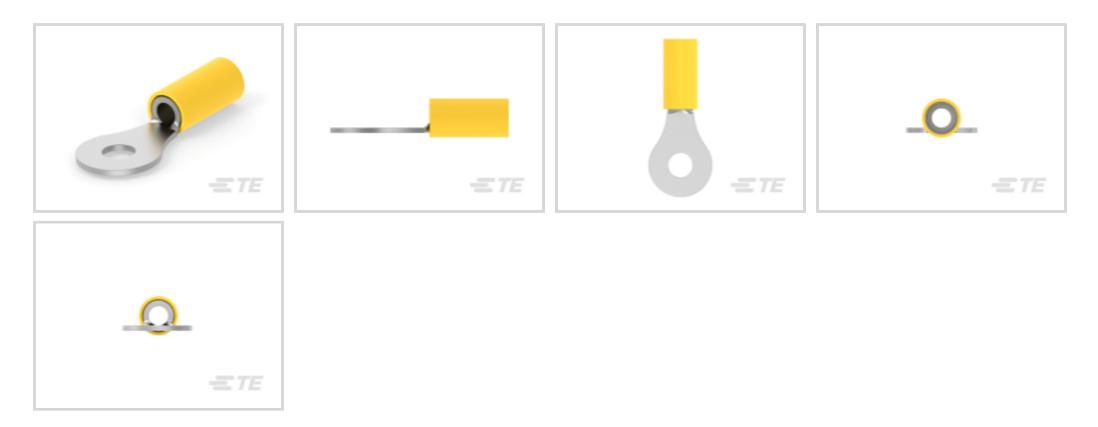

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: M6

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	M6
Sealable	No
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Holes	1
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Insulation Sleeve Color	Yellow
Stripe Color	Yellow
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin



Closed Ring Tongue Terminal, 12 – 10 AWG, M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PIDG



Mechanical Attachment

Wire Insulation Support	With
Dimensions	
Wire Size	5180 – 13100 CMA
Stud Diameter	6.35 mm[.25 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	33.8 mm[1.331 in]
Compatible Insulation Diameter (Max)	6.35 mm[.25 in]
Compatible Insulation Diameter Range	3.81 – 6.35 mm[.15 – .25 in]
Usage Conditions	
Insulation Option	Partially Insulated
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Industry Standards	
Government Qualified Terminal	No
Packaging Features	

Packaging Quantity

Packaging Method

Loose Piece

500

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Closed Ring Tongue Terminal, 12 – 10 AWG, M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PIDG



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts






Also in the Series | PIDG

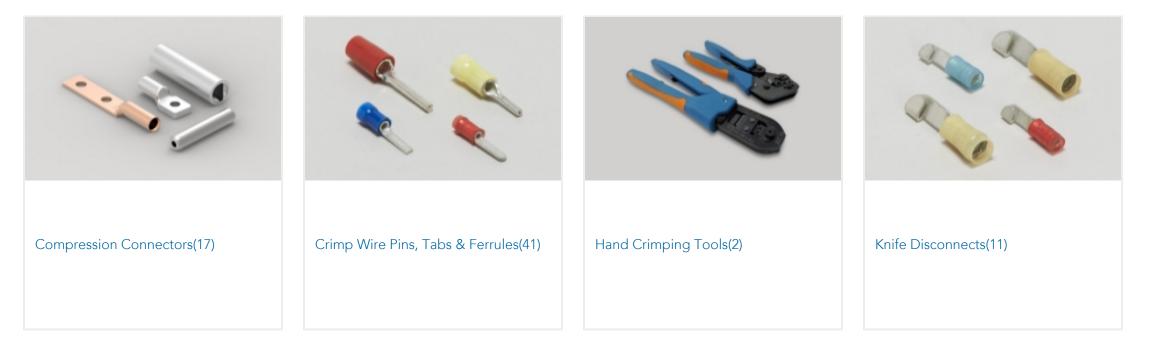



Closed Ring Tongue Terminal, 12 – 10 AWG, M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PIDG



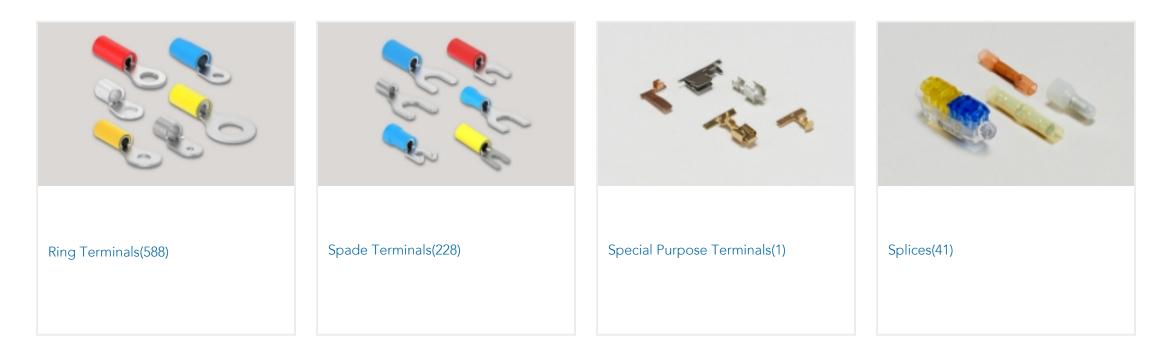

Customers Also Bought

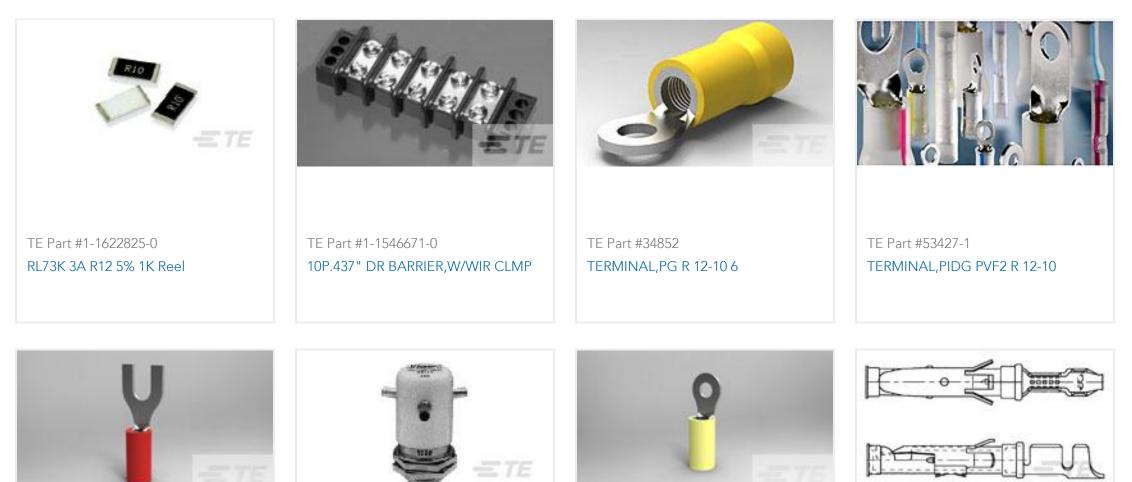



TE Part #1618278-1

TE Part #35108

TE Part #1-163088-0

PIDG SPADE



Documents

Product Drawings
PIDG RING

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_130205_M.2d_dxf.zip

Closed Ring Tongue Terminal, 12 – 10 AWG, M6 Stud, 6.35 mm [.25 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PIDG



English

Customer View Model ENG_CVM_CVM_130205_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_130205_M.3d_stp.zip

English

3D PDF

English

Customer View Model ENG_CVM_130205_F1.3d_igs.zip

English

Customer View Model

ENG_CVM_130205_F1.3d_stp.zip

English

Customer View Model ENG_CVM_130205_F1.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.