
1375795-2 - ACTIVE

AMPMODU TE Internal #: 1375795-2 104 Position, 2.54 mm [.1 in] Centerline, PC/104 Connectors View on TE.com >



Connectors > PCB Connectors > Board-to-Board Connectors > PC/104 Connectors

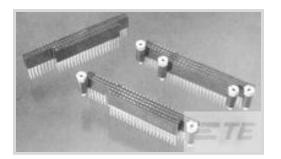

Number of Positions: 104 Centerline (Pitch): 2.54 mm [.1 in] Number of Loaded Positions: 104 Contact Current Rating (Max): 3A

Features

Product Type Features

Connector & Contact Terminates To

Connector System

Configuration Features

Stacking Configuration

Number of Positions

Printed Circuit Board

Board-to-Board

Stack Through

104

Number of Loaded Positions	104
Electrical Characteristics	
Insulation Resistance	1000 MΩ
Dielectric Withstanding Voltage (Max)	500 VAC
Body Features	
Primary Product Color	Black
Contact Features	
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	12.27 mm[.483 in]
Mechanical Attachment	

C For support call+1 800 522 6752

1375795-2

104 Position, 2.54 mm [.1 in] Centerline, PC/104 Connectors



Connector Mounting Type	Board Mount
PCB Mount Retention Type	Action/Compliant Tail
Housing Features	
Housing Material	Nylon GF
Centerline (Pitch)	2.54 mm[.1 in]
Jsage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

104 Position, 2.54 mm [.1 in] Centerline, PC/104 Connectors




Compatible Parts

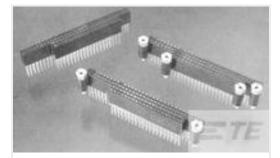

TE Part # 1375795-5 PC104 ASY STKTHRU UNKEYED

Customers Also Bought

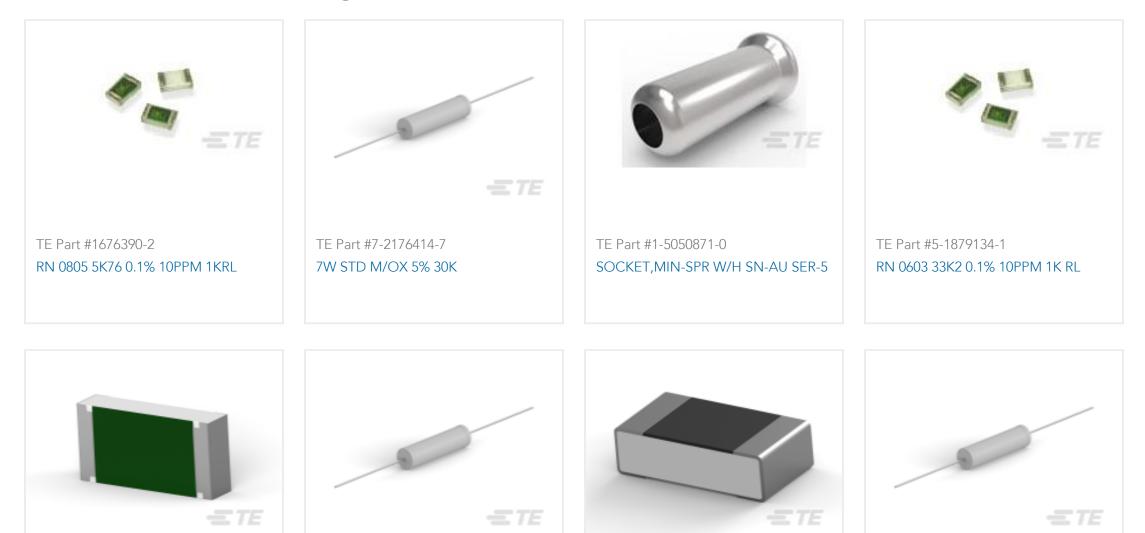

TE Part #2-2176397-7	TE Part #5-2176414-6	TE Part #6-2176370-4	TE Part #5-2176414-1
3502 12R 1%	7W STD M/OX 5% 3K9	RQ 0603 1K96 0.1% 10PPM 5K RL	7W STD M/OX 5% 2K4



Documents

Product Drawings PC104 ASY STKTHRU UNKEYED

English

CAD Files

3D PDF

English

1375795-2

104 Position, 2.54 mm [.1 in] Centerline, PC/104 Connectors



Customer View Model

ENG_CVM_1375795-2_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_1375795-2_H.3d_igs.zip

English

Customer View Model

ENG_CVM_1375795-2_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the $\ensuremath{\text{Terms}}$ and $\ensuremath{\text{Conditions}}$ of use.

Datasheets & Catalog Pages AMPMODU_INTERCONNECTION_SYSTEM_SECTION1AND2

English

Product Specifications

Application Specification

English

Agency Approvals UL Report

English